

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF ESL 400-400B @1480 R.P.M

ESL 400-400B/Y/407054

**FISHER PUMP**

ESL RANGE

MODEL ESL 400-400B

WORKING PRESS. 16 bar

SIZE 400x400-410


TEST PRESS. 24 bar

TYPE-END SUCTION BACK PULL-OUT

SPEED 1480 rpm


SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

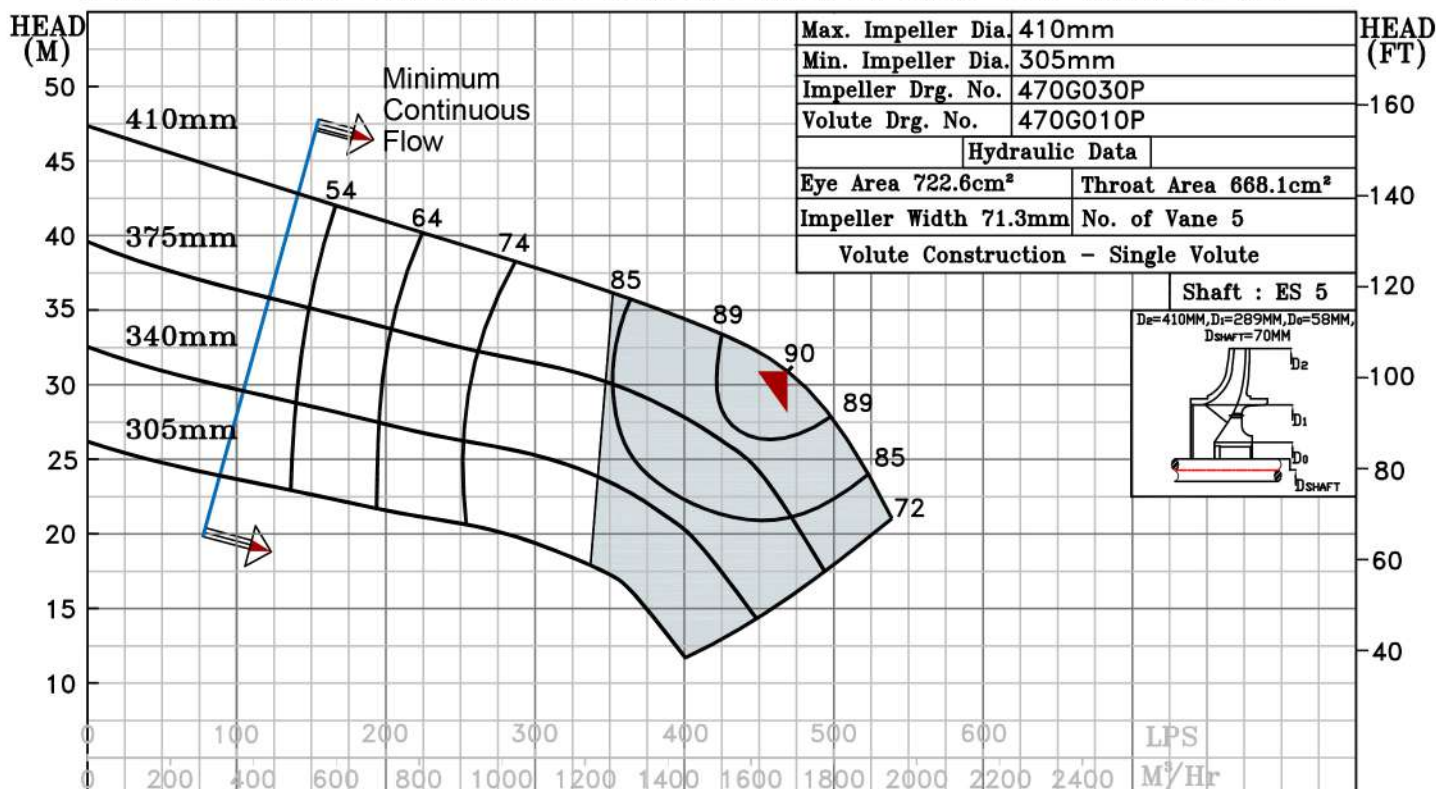

B.E.P Flow	1688 M <sup>3</sup> /Hr.
B.E.P Head	31 M
Speed	1480 R.P.M
Ns : 3985 US UNITS	

NPSHR	
(m)	(ft)
18	60
14	45
10	30
6	15

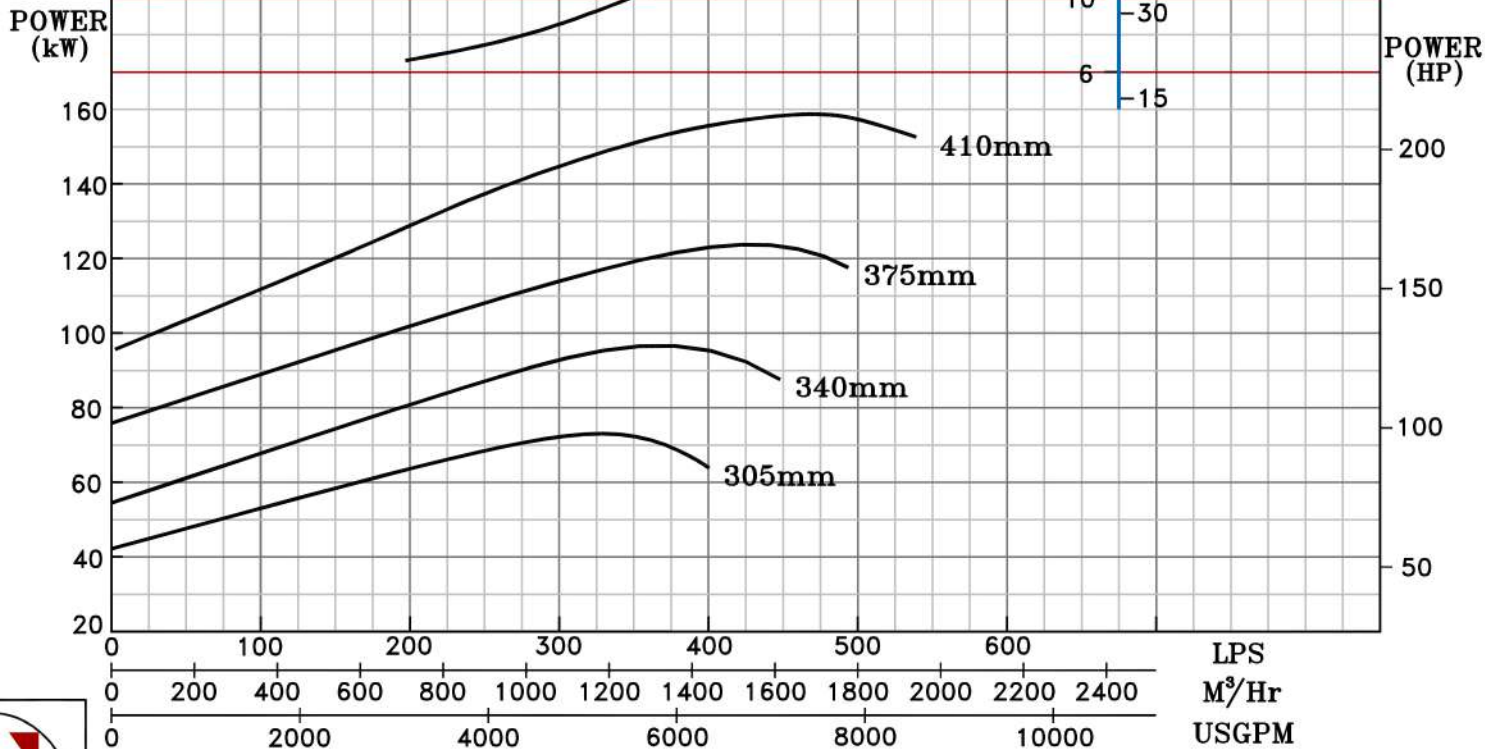

1480 RPM