


NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 6HF15 @2950 R.P.M		6HF15/Y/801852	
FISHER PUMP <i>HF RANGE</i>	MODEL 6HF15	WORKING PRESS.	20 bar
	SIZE 200x150-370	TEST PRESS.	30 bar
	TYPE - SPLIT CASE SINGLE STAGE		
RATED CAPACITY: 1000,1250 USGPM		SPEED 2950 rpm	
		DATE - 16.10.17	

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

Max. Impeller Dia.	370mm
Min. Impeller Dia.	320mm
Impeller Drg. No.	818G130PJ
Volute drg. No.	818G010PJ
Hydraulic Data	
Eye Area 190.6cm ²	Throat Area 69.7cm ²
Impeller width 18mm	No. of Vanes 6
Volute Construction - Double Volute	
Shaft : Gr-2F	

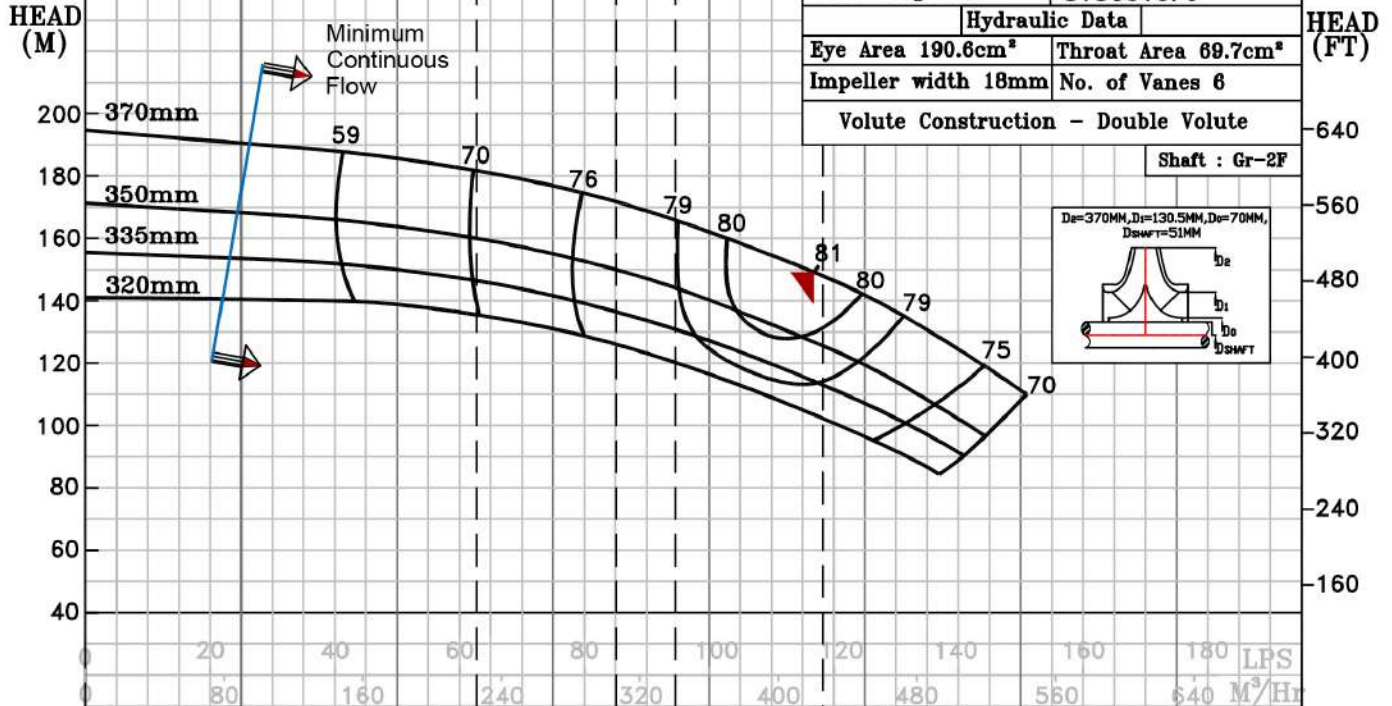

B.E.P Flow	416.2 M ³ /Hr.
B.E.P Head	149.8 M
Speed	2950 R.P.M
Ns : 1210 US UNITS	

