

PERFORMANCE CURVE OF 6HFTD12L @2900 R.P.M

**FISHER PUMP**

HFT RANGE

MODEL 6HFTD12L

SIZE 200x150-314

TYPE-AXIALLY SPLIT CASE TWO STAGE

RATED CAPACITY - 1000,1250 USGPM

SPEED 2900 rpm

TEST DATE- 17.12.19

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

Curve No.	9013K	Max. Impeller Dia.	314mm
Impeller No.	913G030P	Min. Impeller Dia.	260mm


Shaft : Gr-3F

HEAD (PSI) (M)


HEAD (FT)

MAX WORKING PRESSURE - 443PSI

PUMP RATING	
USGPM	PSI
1000	227-329
1250	216-323

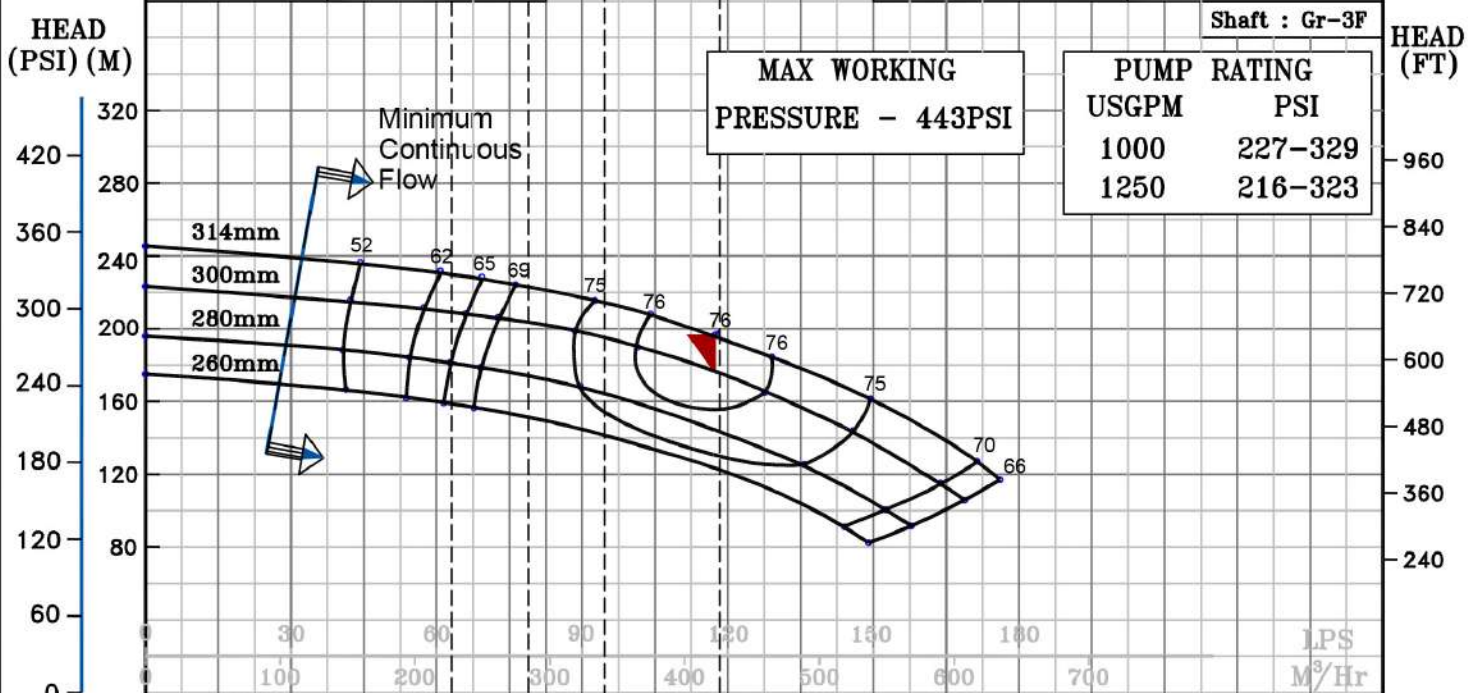

NPSHr (M) (FT)



B.E.P Flow	422.8 M³/Hr.
B.E.P Head	196.7 M
Speed	2900 R.P.M
Ns	1644 US UNITS

POWER (kW)

POWER (HP)

