

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 4HFT19 @2300 R.P.M

4HFT19/Y/0111

FISHER PUMP

MODEL 4HFT19

WORKING PRESS. 30 bar

SIZE 150x100-470

TEST PRESS. 45 bar

HFT RANGE

TYPE-AXIALLY SPLIT CASE TWO STAGE


SPEED 2300 rpm

RATED CAPACITY: 750 USGPM

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

Max. Impeller Dia.	470mm
Min. Impeller Dia.	383mm
Impeller Drg. No.	310G030P
Volute Drg. No.	310G011P
Hydraulic Data	
Eye Area 154cm ²	Throat Area 14.1cm ²
Impeller Width 24mm	No. of Vanes 6
Volute Construction - Two Single Volutes	

Shaft Gr. : 3S

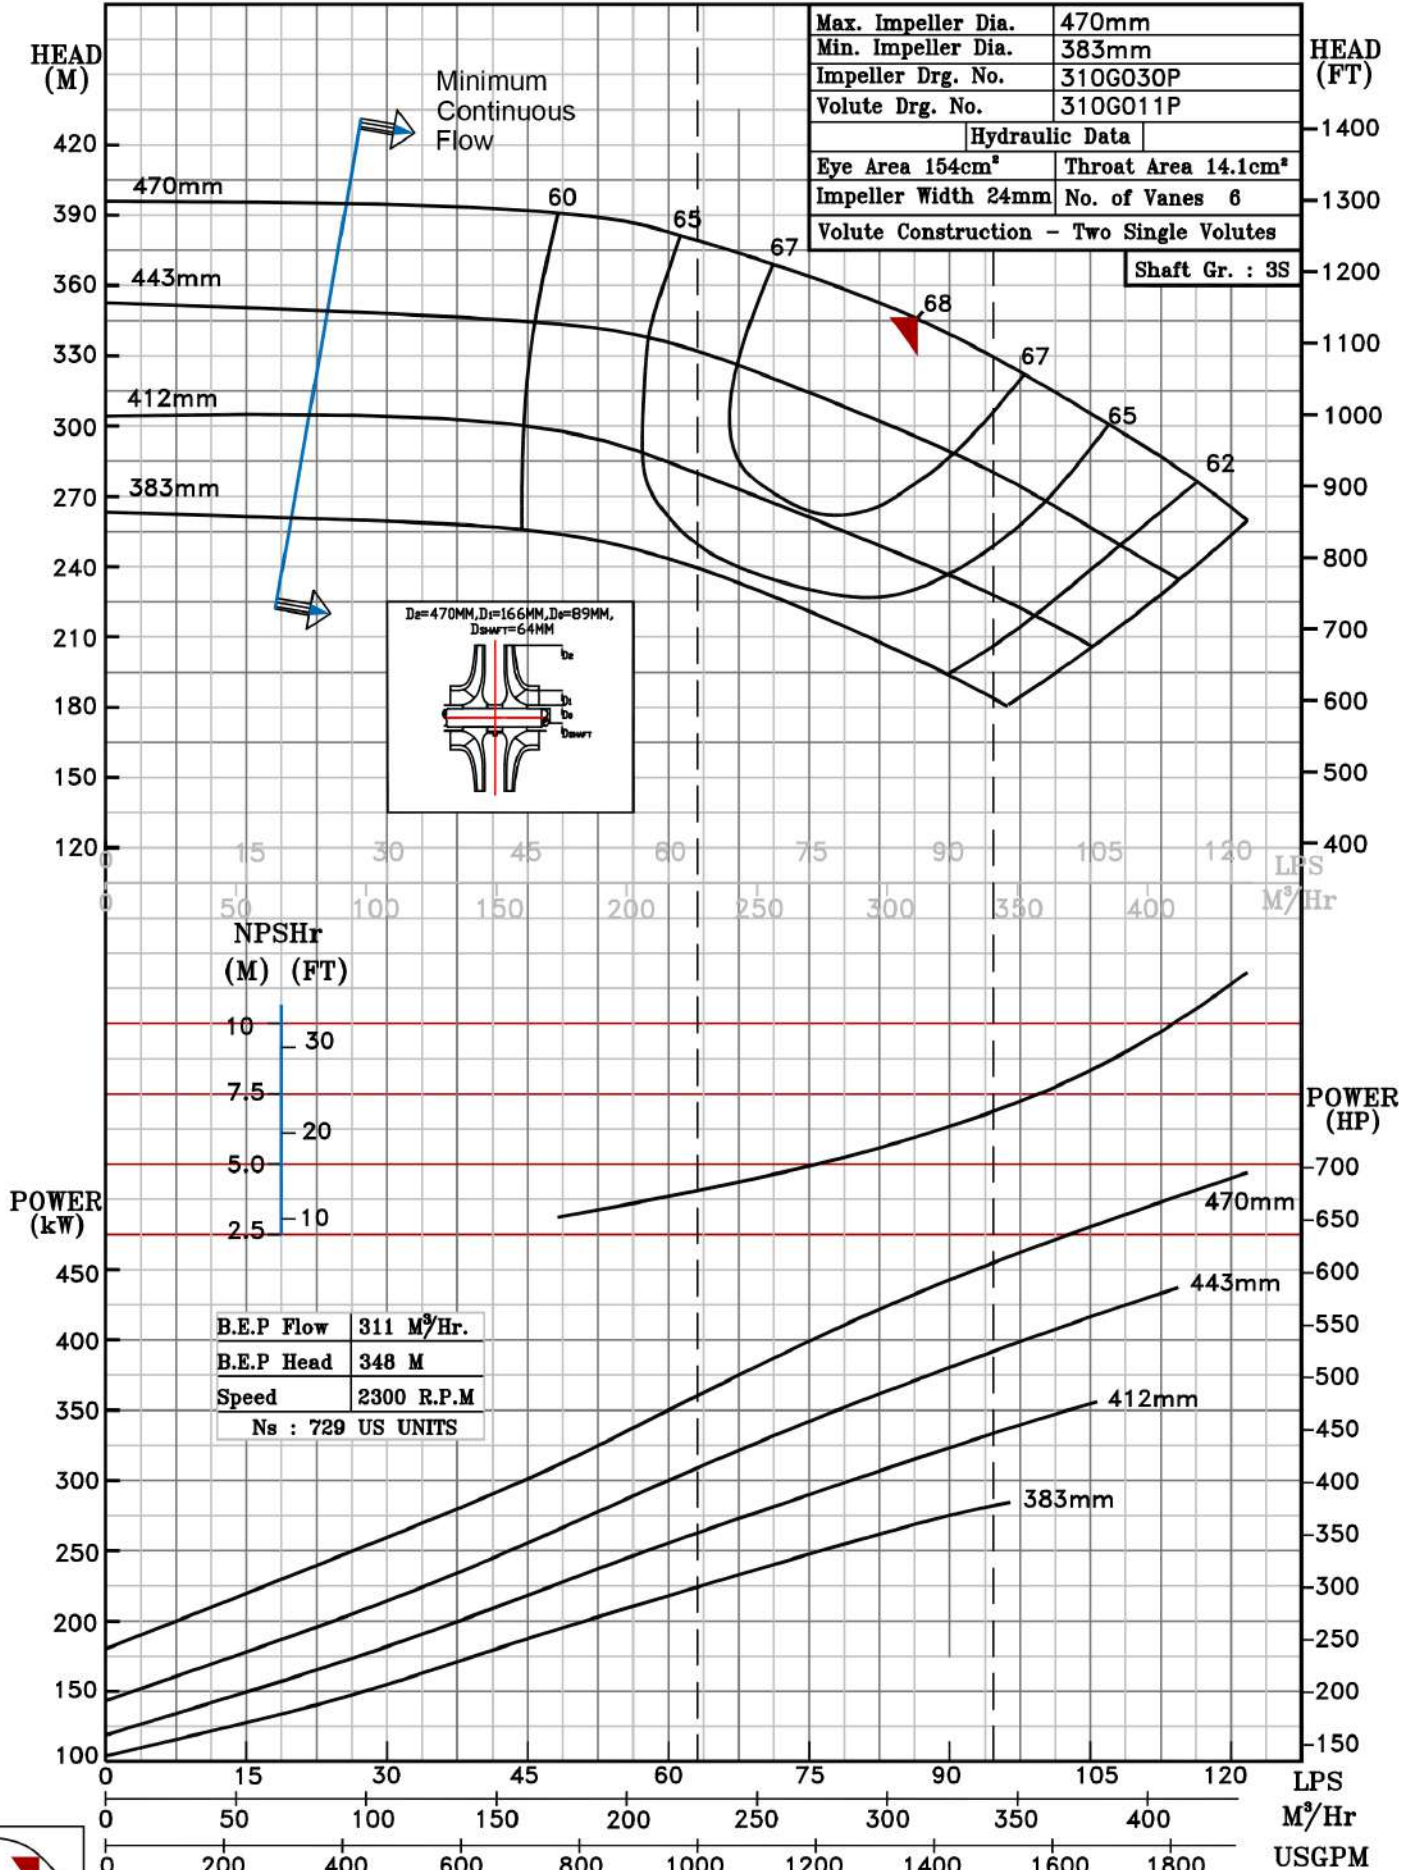

2300 RPM