

PERFORMANCE CURVE OF 6HFTD12L @2900 R.P.M

**FISHER PUMP**

**HFT RANGE**

MODEL 6HFTD12L

SIZE 200x150-314

TYPE-AXIALLY SPLIT CASE TWO STAGE

RATED CAPACITY - 1000,1250 USGPM

SPEED 2900 rpm

TEST DATE- 17.12.19


PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

Curve No.	9013K	Max. Impeller Dia.	314mm
Impeller No.	913G030P	Min. Impeller Dia.	260mm

Shaft : Gr-3F

HEAD  
(PSI) (M)

HEAD  
(FT)

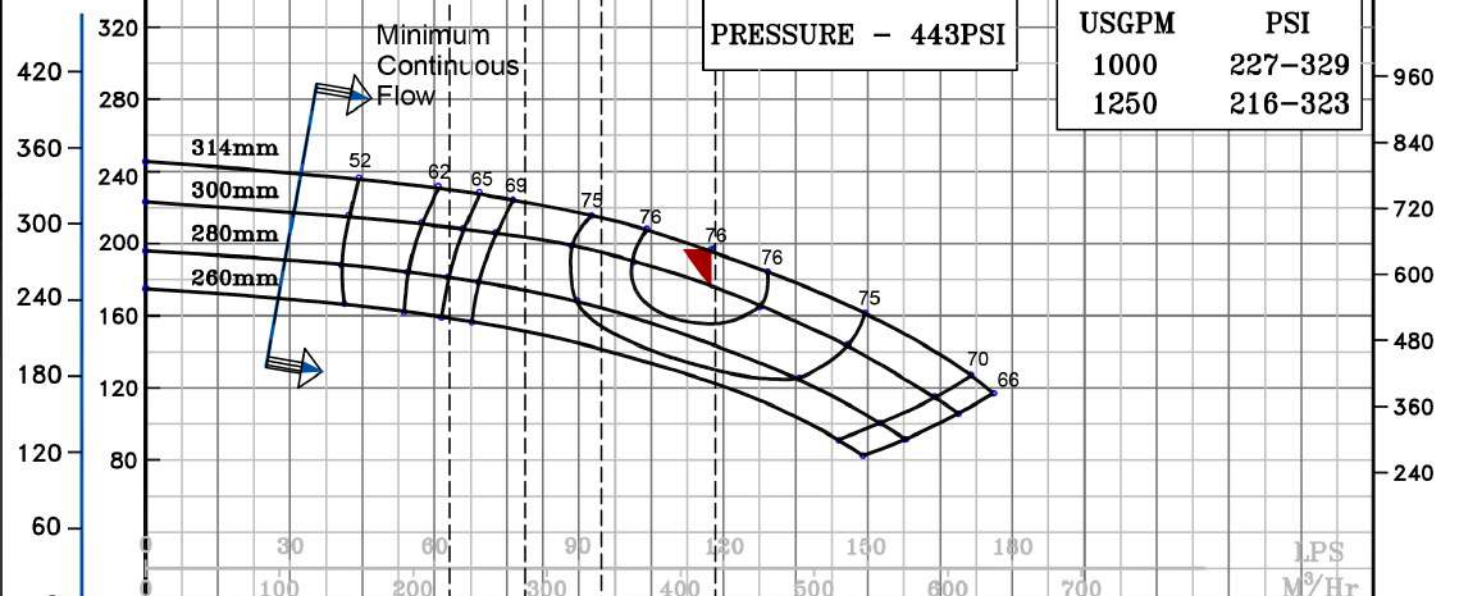


NPSHr  
(M) (FT)

B.E.P Flow	422.8 M <sup>3</sup> /Hr.
B.E.P Head	196.7 M
Speed	2900 R.P.M
Ns	1644 US UNITS

POWER  
(kW)

POWER  
(HP)

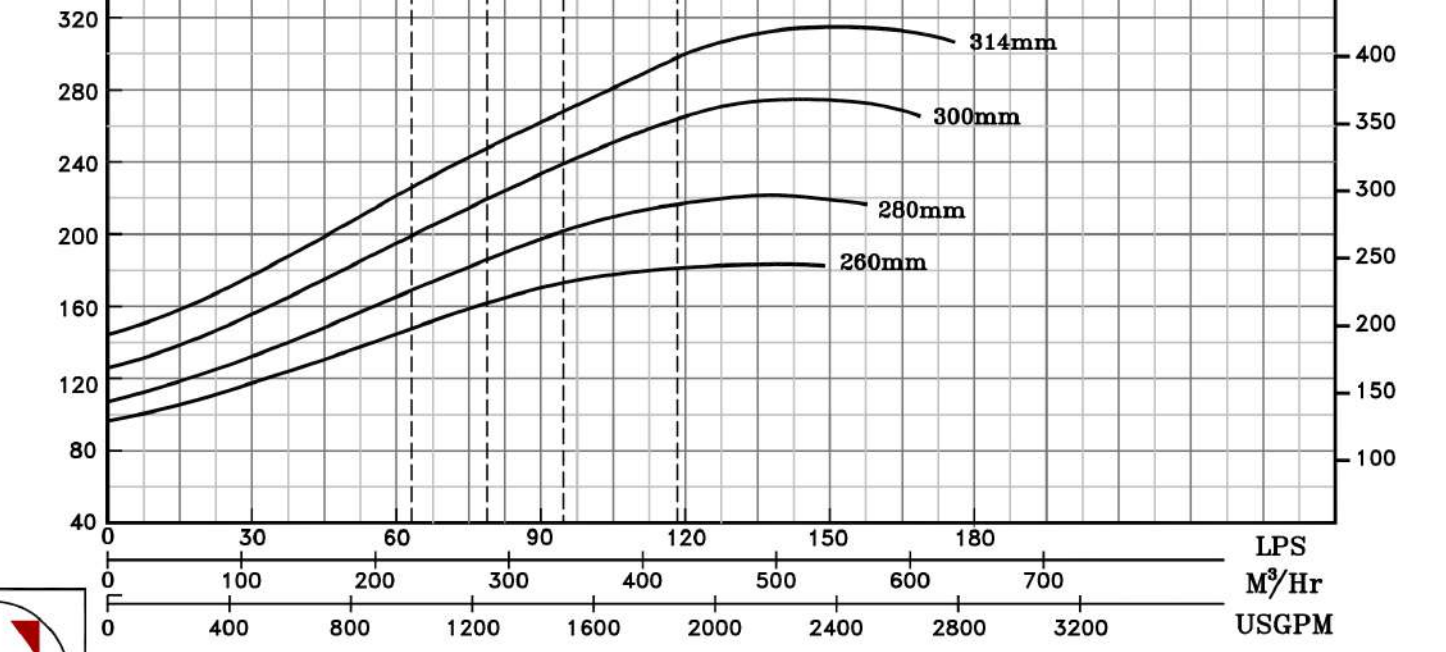

2900 RPM