


NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B


PERFORMANCE CURVE OF 16SW24 @980 R.P.M		16SW24/X/603756	
<b>FISHER PUMP</b>	SW RANGE	MODEL 16SW24	WORKING PRESS. 12 bar
		SIZE 400x400-609	TEST PRESS. 18 bar
		TYPE-DRY PIT NON-CLOG SEWAGE PUMP	
		MAX. SPHERE SIZE - 130MM	SPEED 980 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

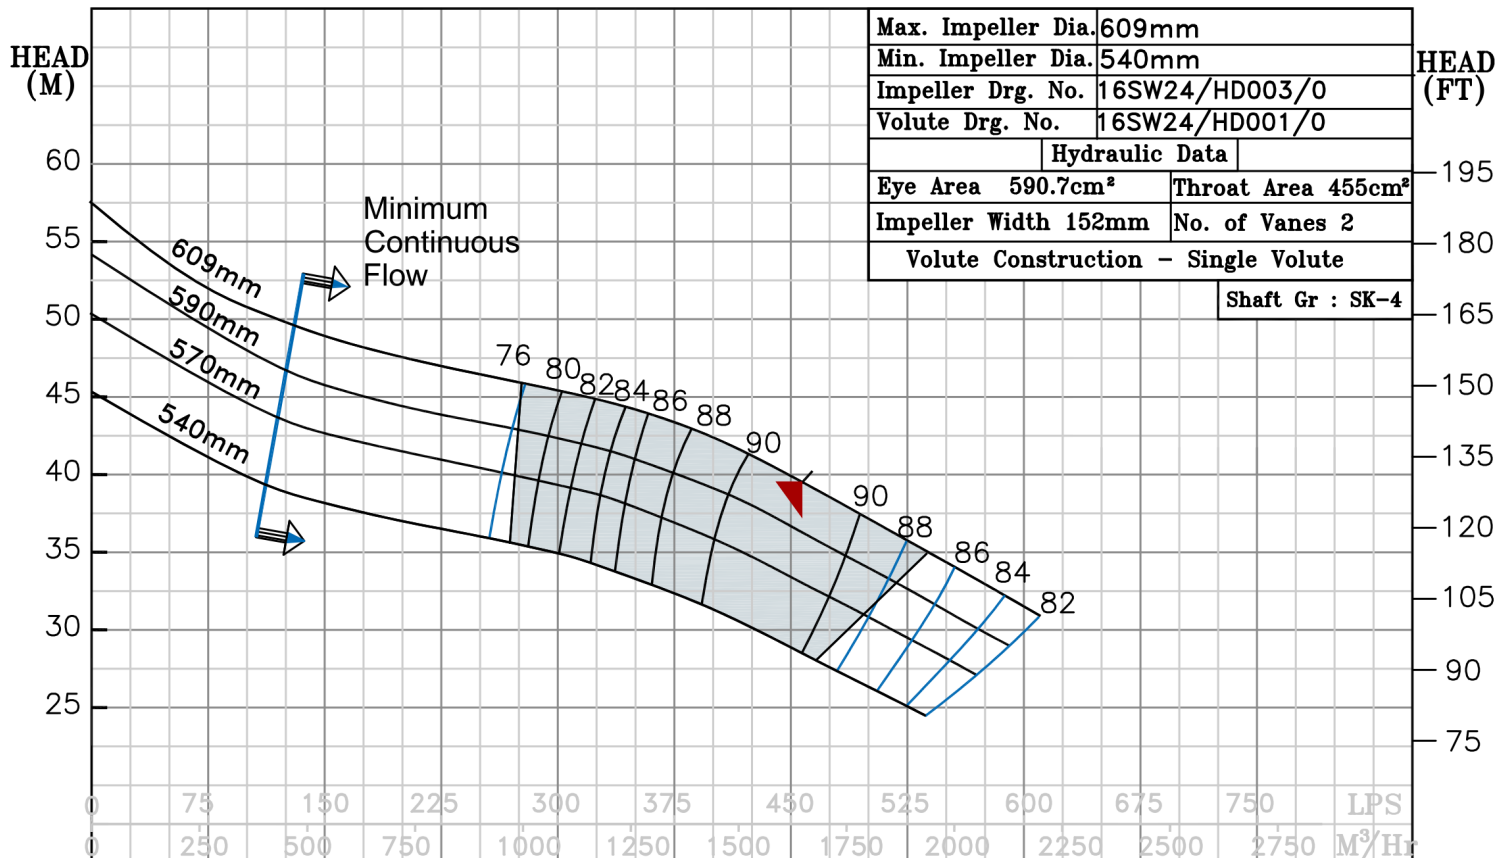

Max. Impeller Dia.	609mm
Min. Impeller Dia.	540mm
Impeller Drg. No.	16SW24/HD003/0
Volute Drg. No.	16SW24/HD001/0
Hydraulic Data	
Eye Area 590.7cm²	Throat Area 455cm²
Impeller Width 152mm	No. of Vanes 2
Volute Construction - Single Volute	
Shaft Gr : SK-4	

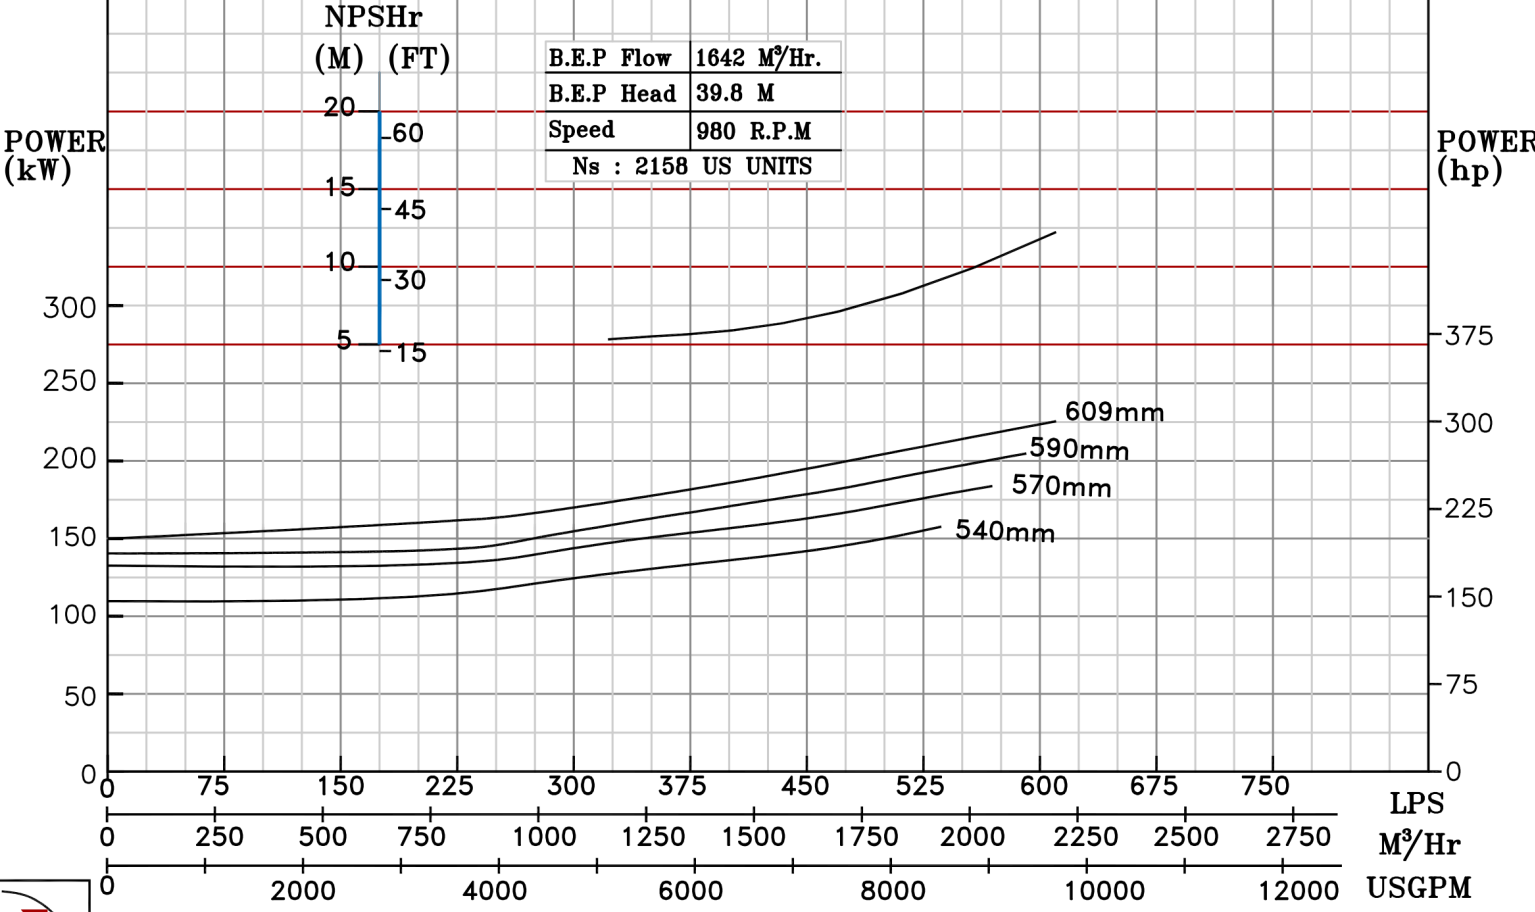

980 RPM