



NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 14SW20 @1480 R.P.M		14SW20/X/603254	
FISHER PUMP	MODEL 14SW20	WORKING PRESS.	12 bar
	SIZE 400x350-515	TEST PRESS.	18 bar
	SW RANGE	TYPE-DRY PIT NON-CLOG SEWAGE PUMP	
	MAX. SPHERE SIZE - 115MM	SPEED 1480 rpm	

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

Max. Impeller Dia.	515mm
Min. Impeller Dia.	416mm
Impeller Drg. No.	14SW20/HD003/O
Volute Drg. No.	14SW20/HD001/O
Hydraulic Data	
Eye Area 416.4cm ²	Throat Area 387cm ²
Impeller Width 127mm	No. of Vane 2
Volute Construction - Single Volute	
Shaft Gr : SK-3	

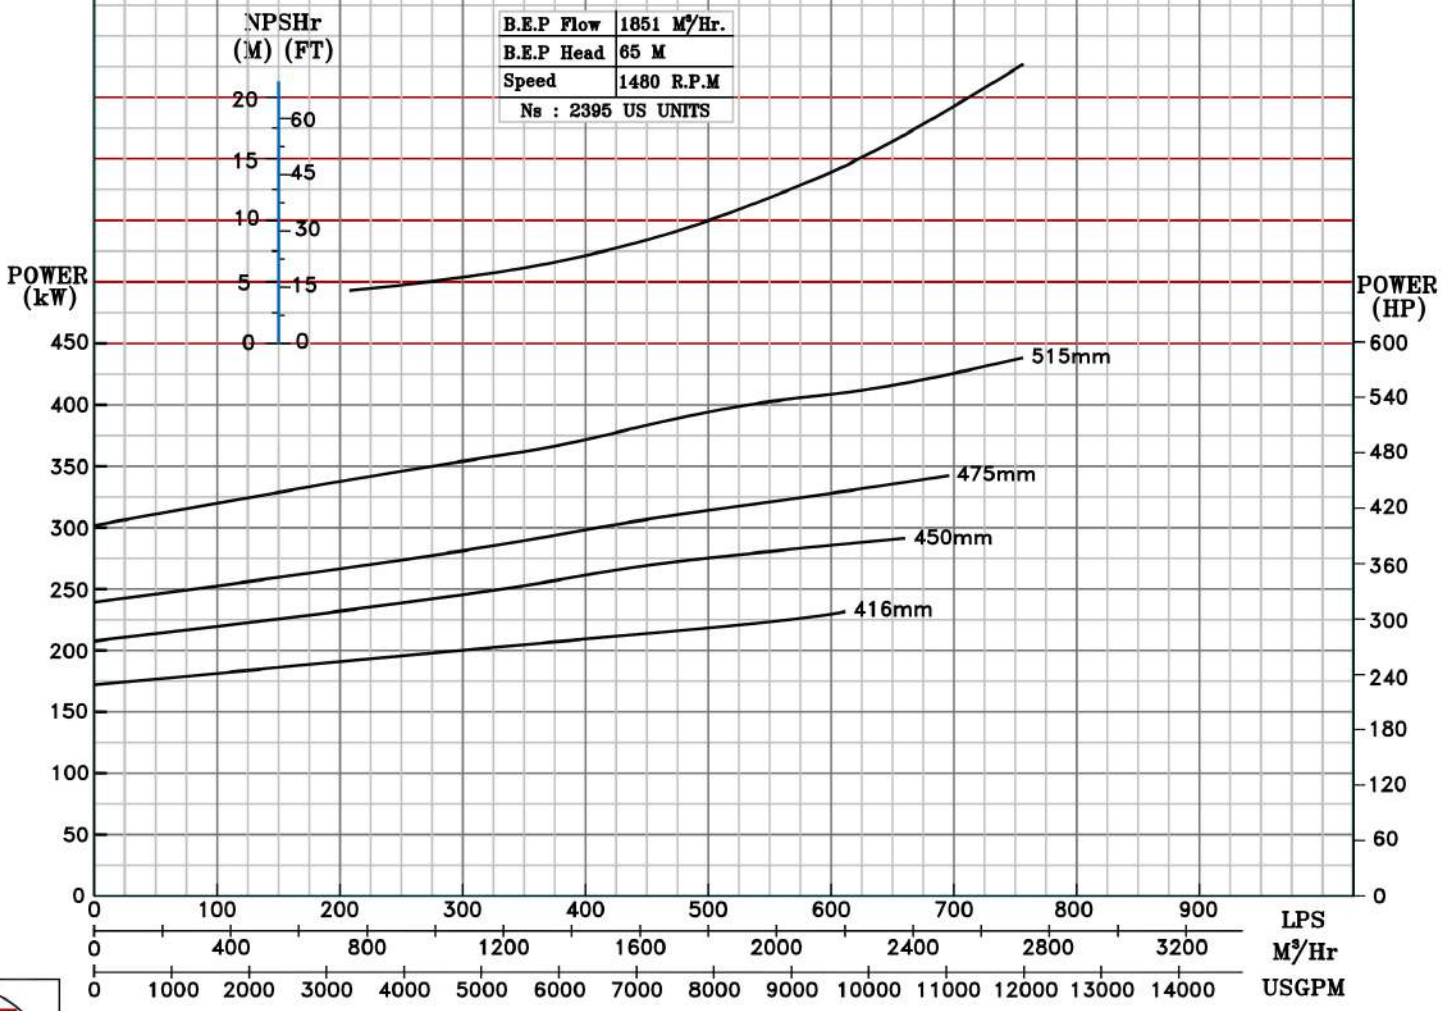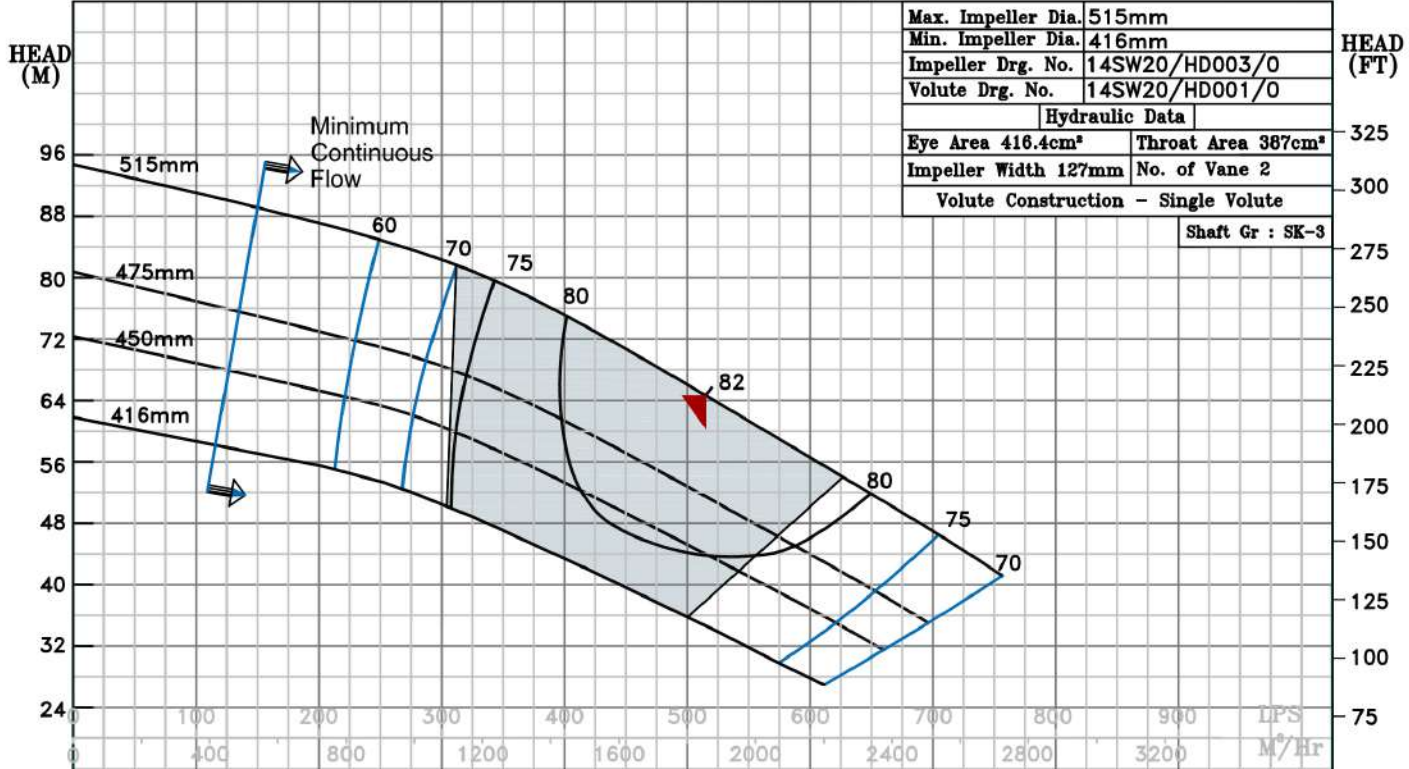

1480 RPM