

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 4SW13 @1480 R.P.M

4SW13/X/600654


FISHER PUMP

SW RANGE

MODEL 4SW13	WORKING PRESS. 12 bar
SIZE 125x100-320	TEST PRESS. 18 bar
TYPE - DRY PIT NON-CLOG SEWAGE PUMP	
MAX. SPHERE SIZE - 30MM	SPEED 1480 rpm


SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

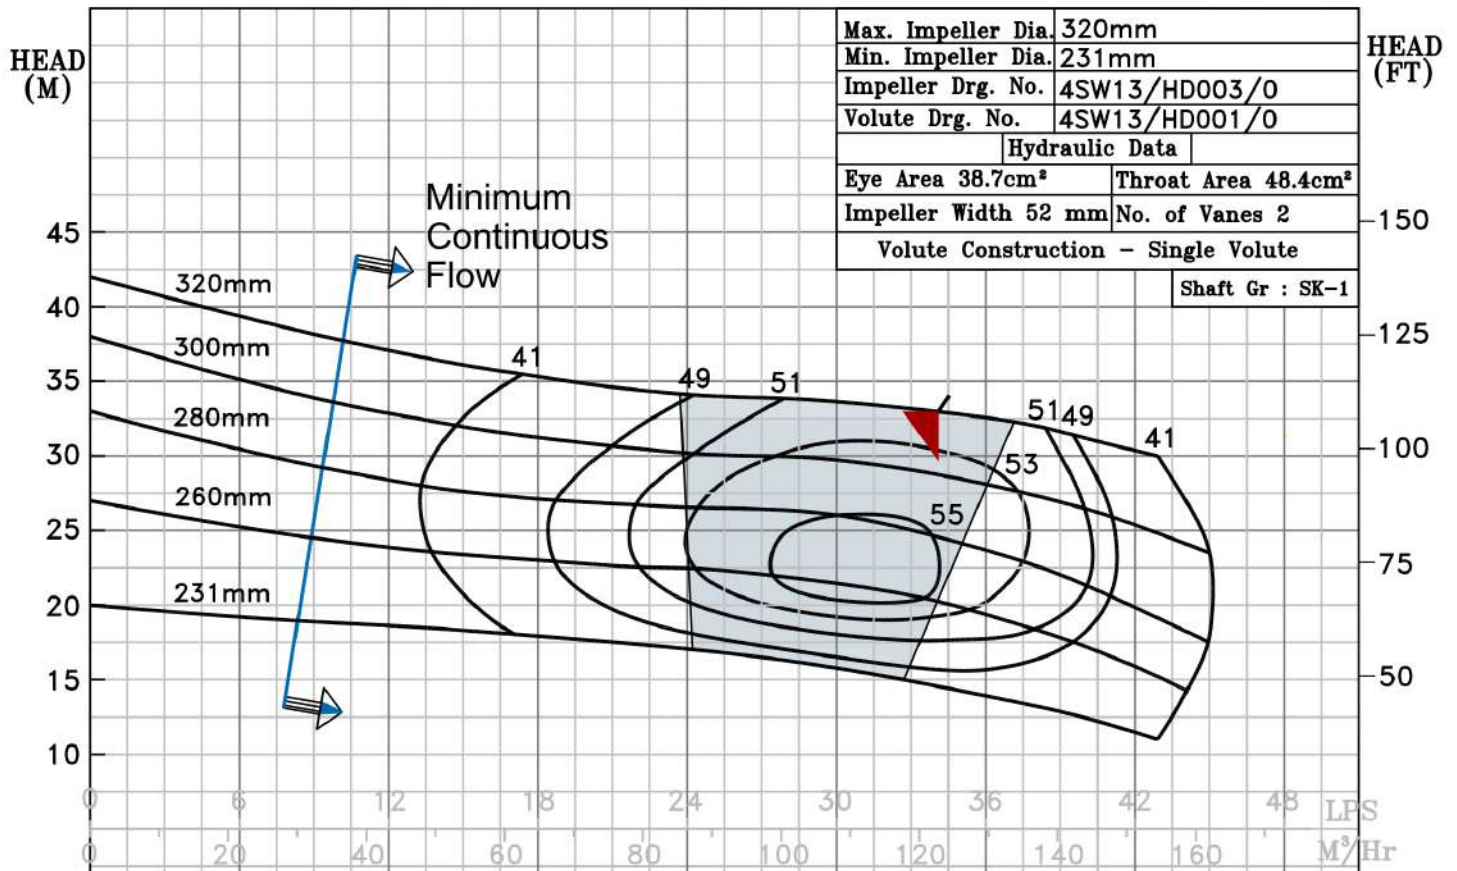

B.E.P Flow	122.5 M ³ /Hr.
B.E.P Head	32.7 M
Speed	1480 R.P.M
Ns	1031 US UNITS

NPSHr	
(M)	(FT)
10	32
8	24
6	16
4	

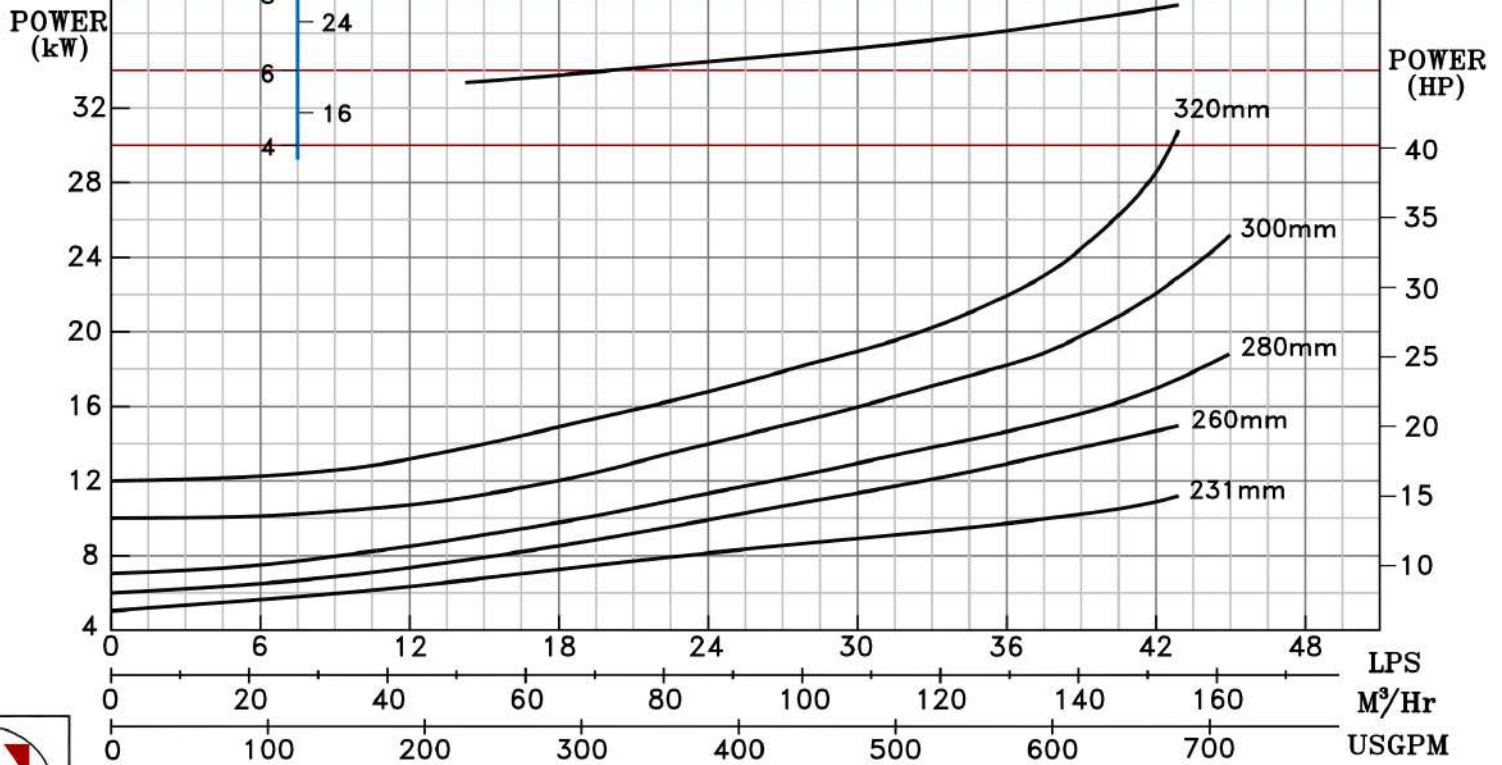

1480 RPM