

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 8SW16L @1480 R.P.M

8SW16L/X/601554


FISHER PUMP

SW RANGE

MODEL 8SW16L	WORKING PRESS.	12 bar
SIZE 250x200-400	TEST PRESS.	18 bar
TYPE-DRY PIT NON-CLOG SEWAGE PUMP		
MAX. SPHERE SIZE - 75MM	SPEED	1480 rpm


SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

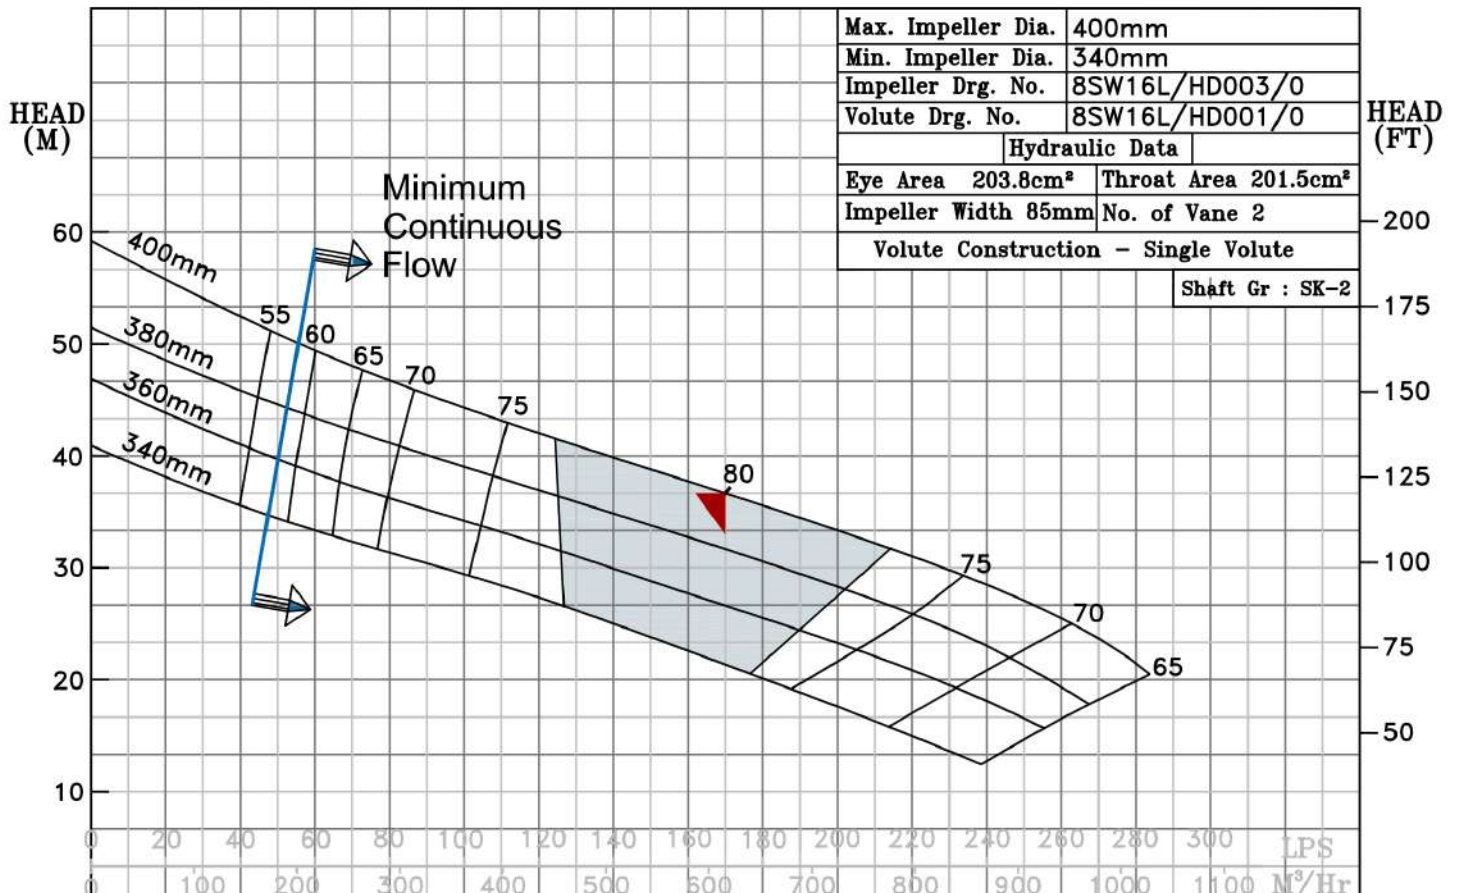

B.E.P Flow	614 M ³ /Hr.
B.E.P Head	36.5 M
Speed	1480 R.P.M
Ns	2126 US UNITS

NPSHr	(M) (FT)
12	36
8	24
4	12
0	0

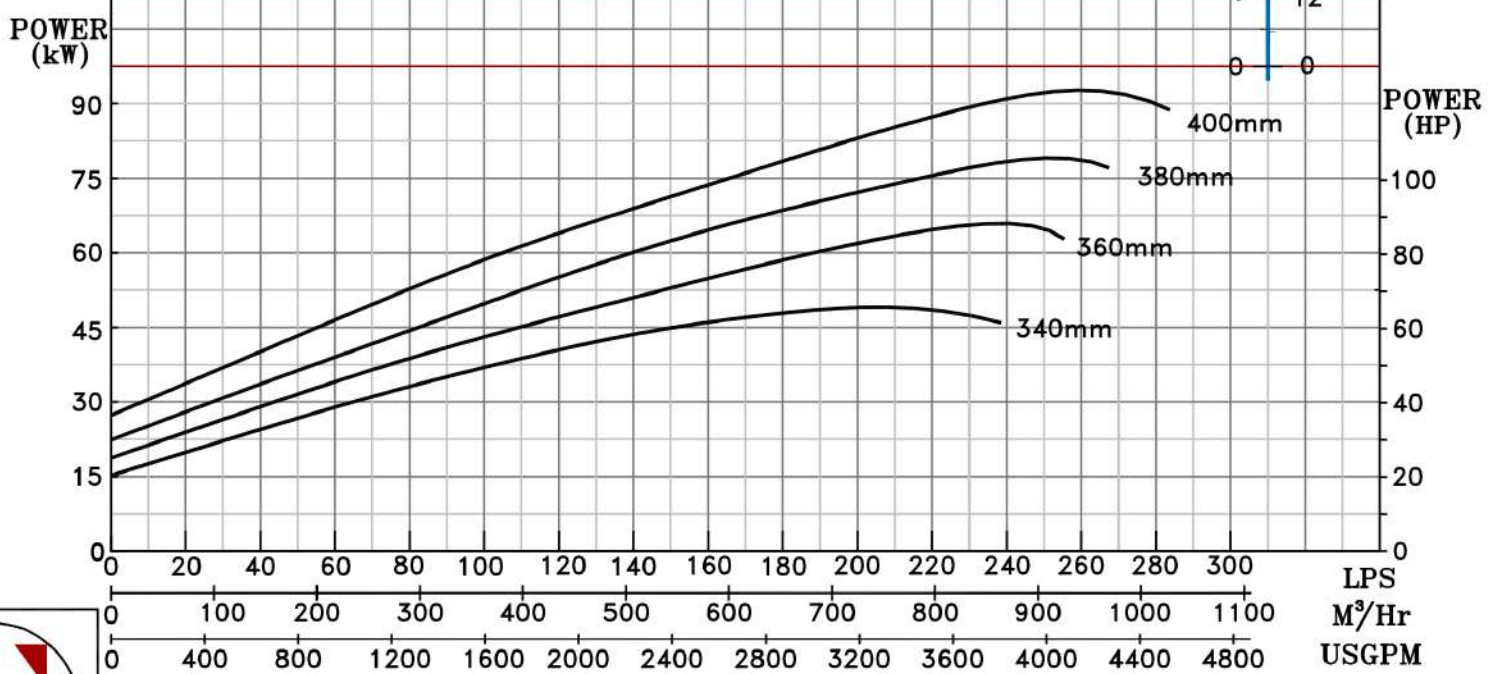

1480 RPM