


NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 10SW19 @980 R.P.M		10SW19/X/602456	
FISHER PUMP	MODEL 10SW19		WORKING PRESS. 12 bar
	SIZE 300x250-480	TEST PRESS. 18 bar	
	TYPE-DRY PIT NON-CLOG SEWAGE PUMP		
	SPHERE SIZE- 100MM	SPEED 980 rpm	
<i>SW RANGE</i>			


SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

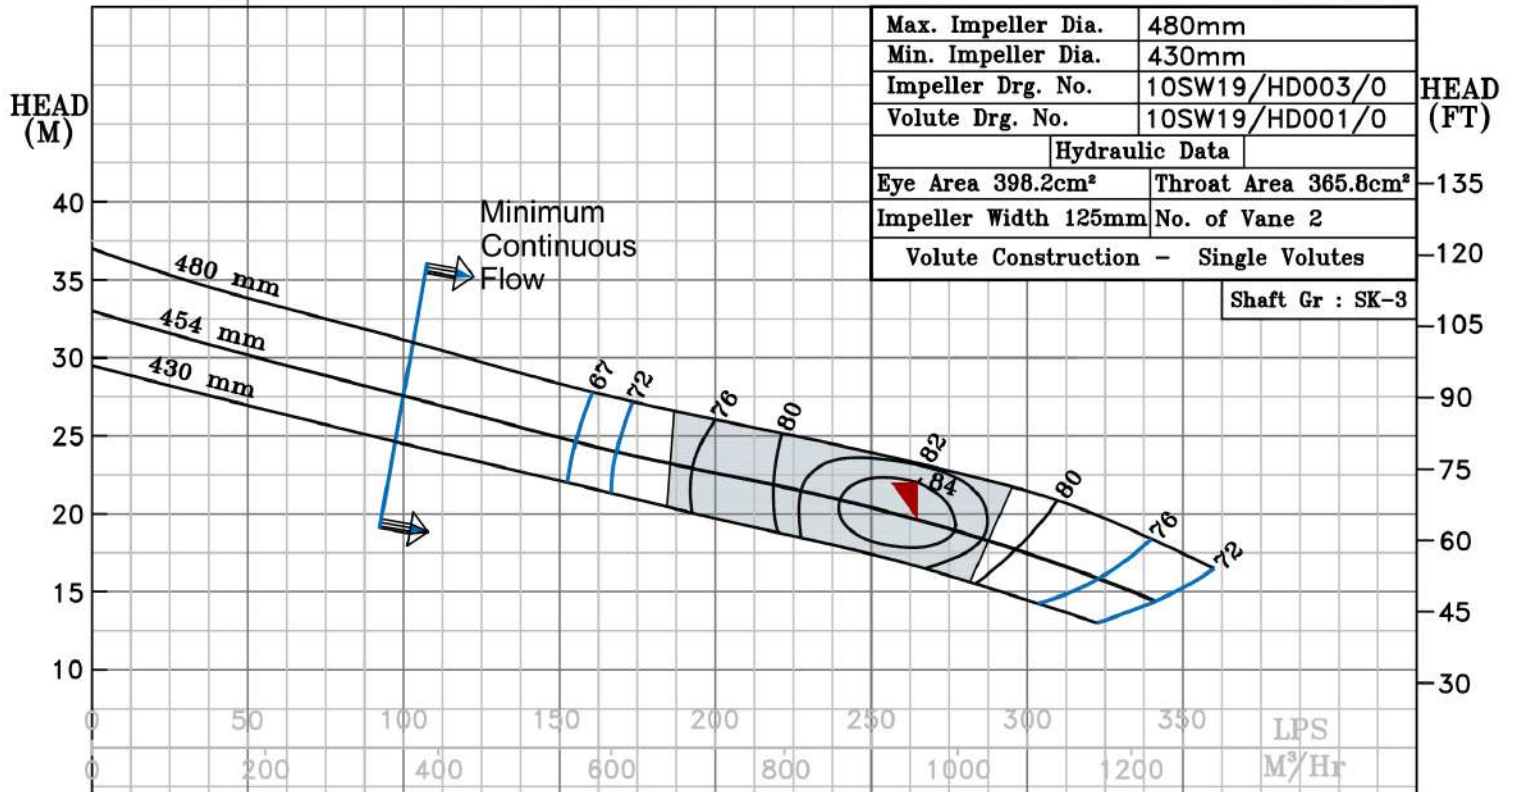

Max. Impeller Dia.	480mm
Min. Impeller Dia.	430mm
Impeller Drg. No.	10SW19/HD003/0
Volute Drg. No.	10SW19/HD001/0
Hydraulic Data	
Eye Area 398.2cm²	Throat Area 365.8cm²
Impeller Width 125mm	No. of Vane 2
Volute Construction - Single Volutes	

Shaft Gr : SK-3

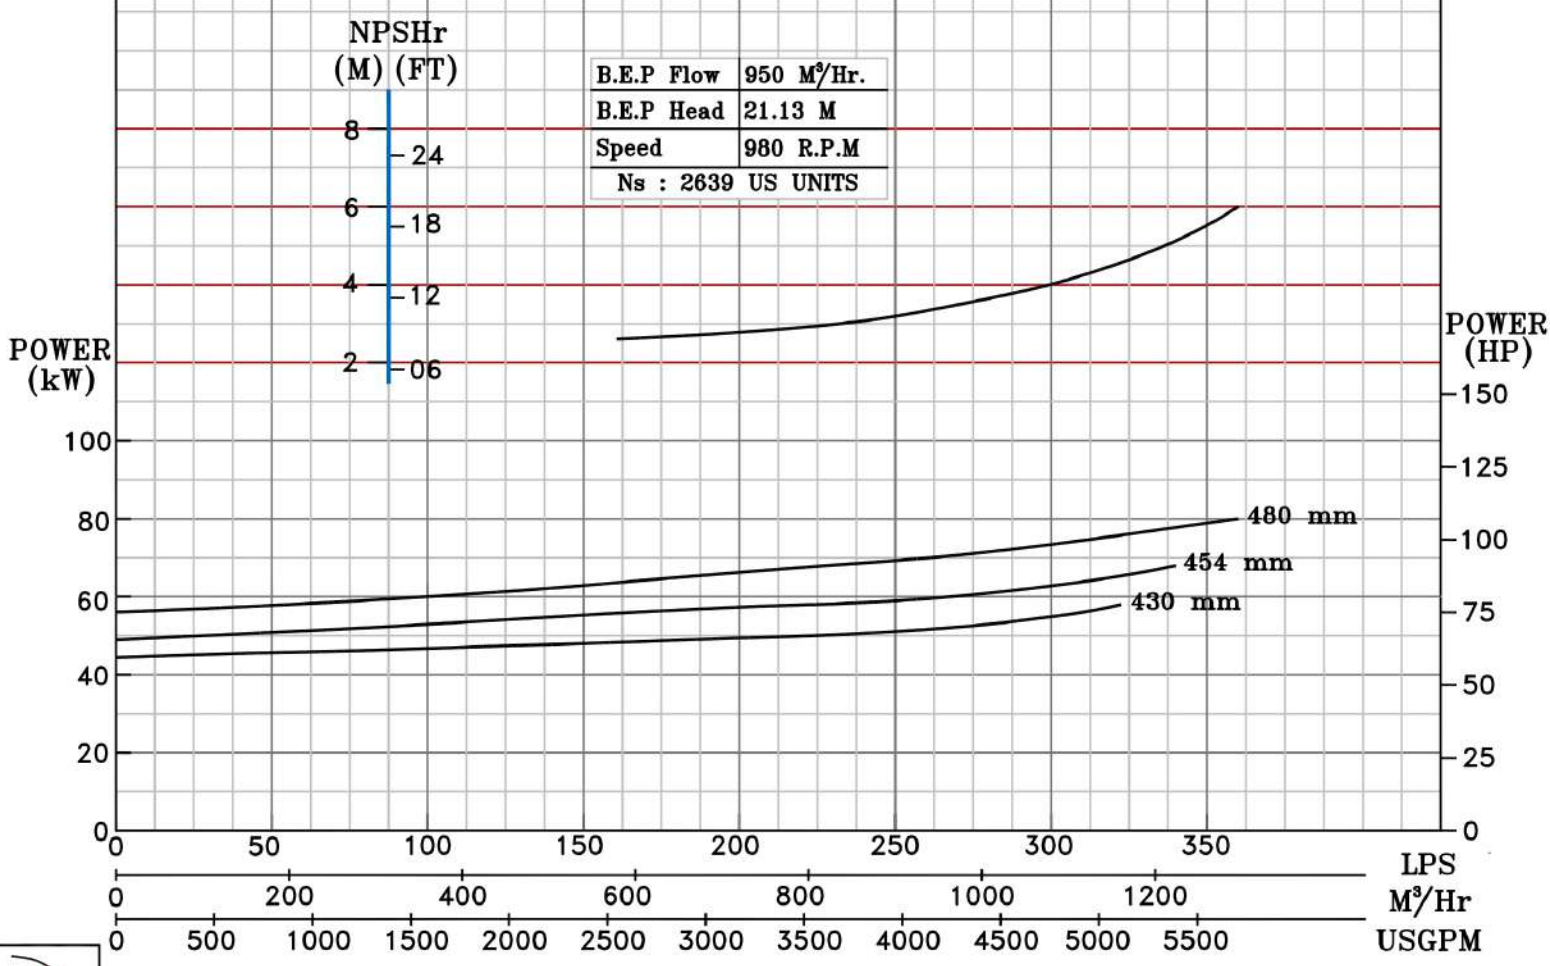

980 RPM