

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 5SW15 @980 R.P.M

5SW15/X/600956

FISHER PUMP

SW RANGE

MODEL 5SW15

WORKING PRESS. 12 bar

SIZE 125x125-380

TEST PRESS. 18 bar


TYPE-DRY PIT NON-CLOG SEWAGE PUMP

MAX. SPHERE SIZE - 50MM

SPEED 980 rpm


SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

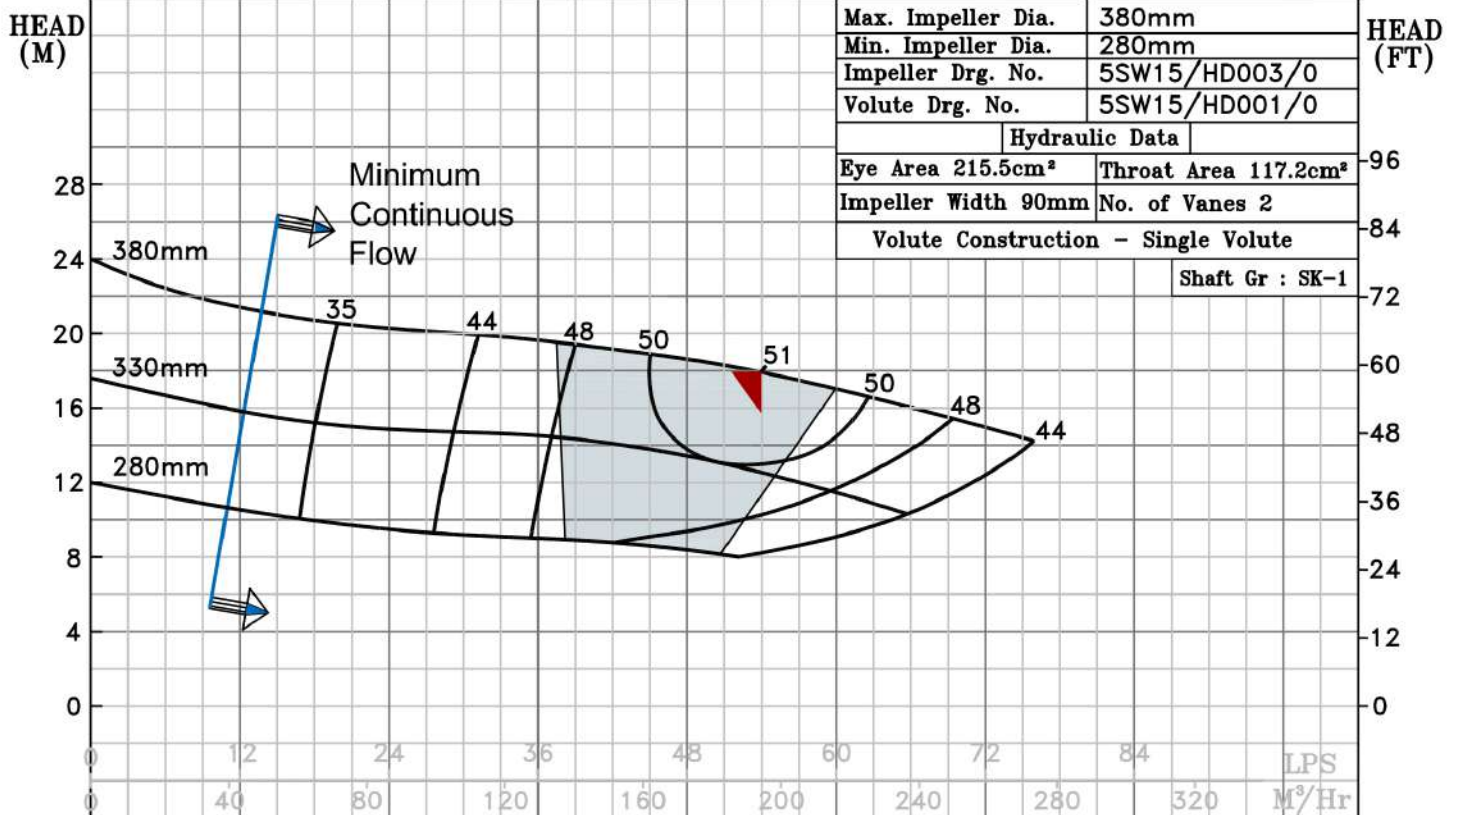

B.E.P Flow	194 M ³ /Hr.
B.E.P Head	18 M
Speed	980 R.P.M
Ns : 1345 US UNITS	

NPSHr	
(M)	(FT)
10	30
8	24
6	18
4	12

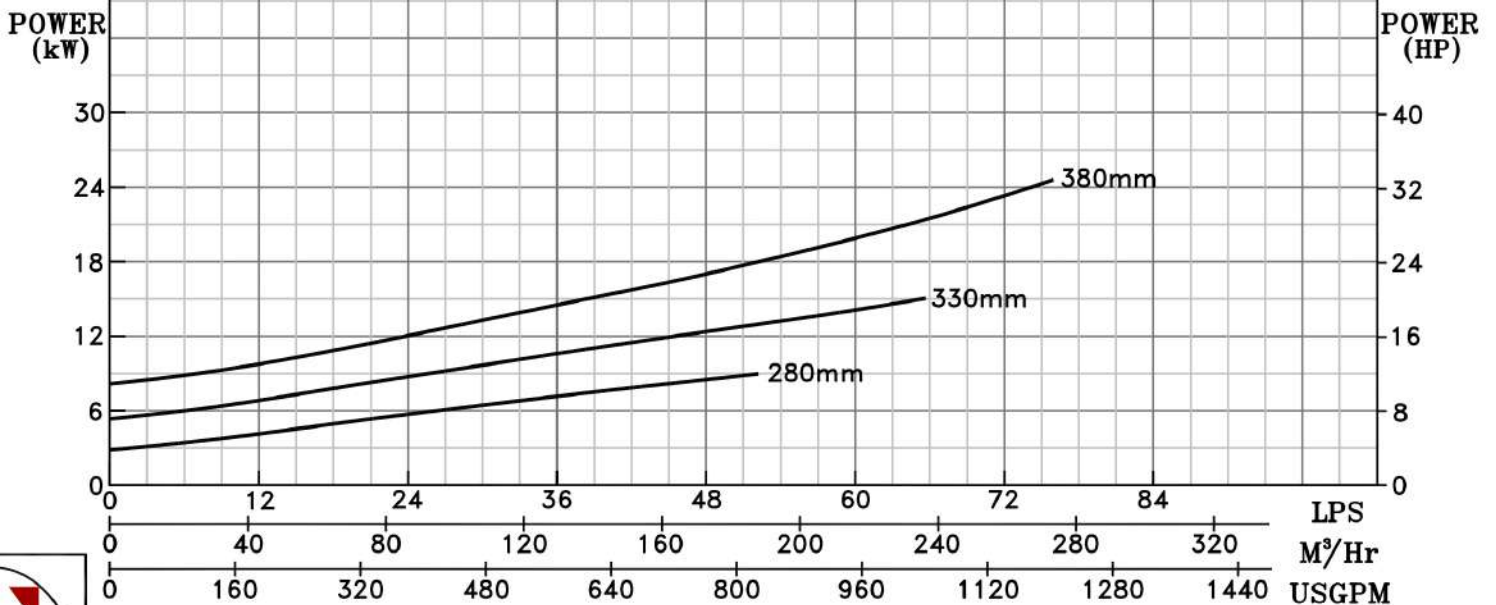

980 RPM