


NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 10SW21 @740 R.P.M		10SW21/X/602558	
FISHER PUMP	MODEL 10SW21	WORKING PRESS.	12 bar
	SIZE 300x250-520	TEST PRESS.	18 bar
	SW RANGE	TYPE-DRY PIT NON-CLOG SEWAGE PUMP	
	MAX. SPHERE SIZE - 100MM	SPEED 740 rpm	


SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

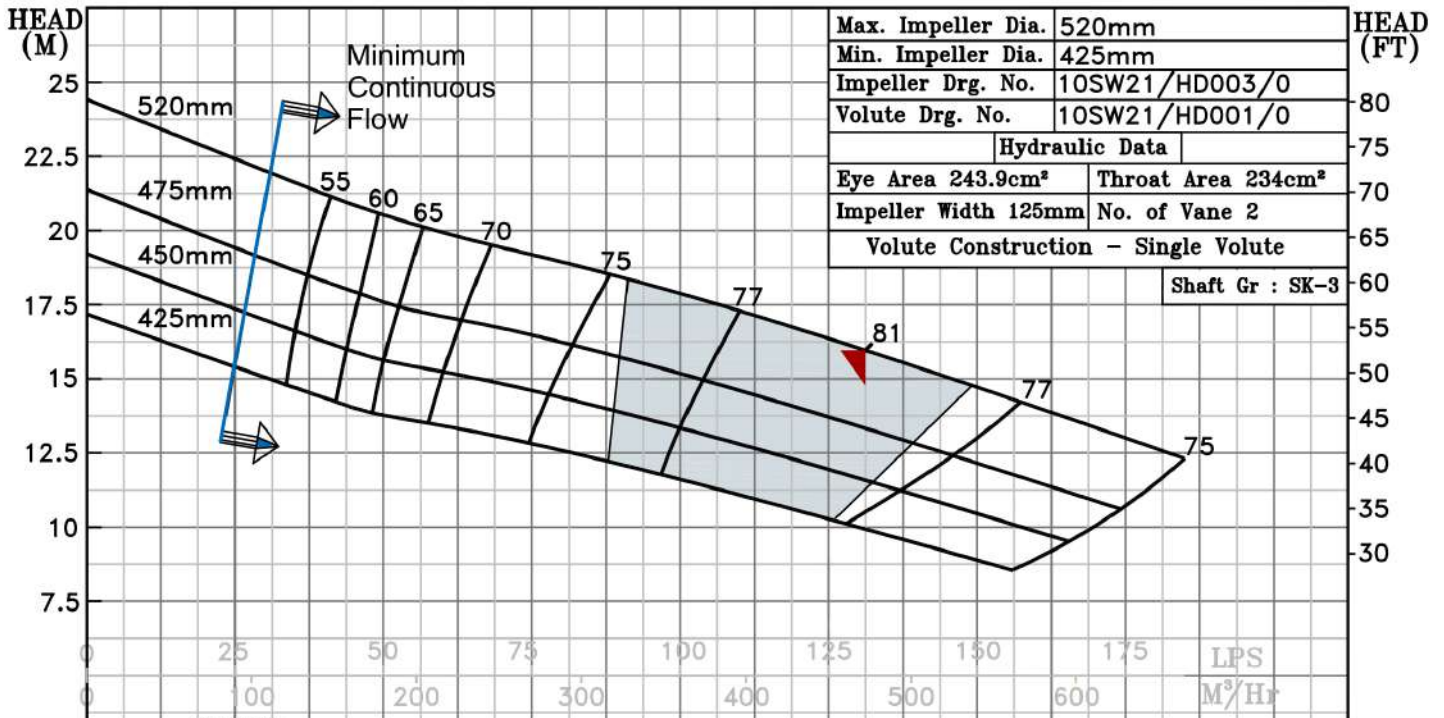

NPSHr	
(M) (FT)	
3.0	9
2.5	7.5
2.0	6
1.5	4.5
1.0	3

B.E.P Flow	471.5 M³/Hr.
B.E.P Head	16 M
Speed	740 R.P.M
Ns : 1729	US UNITS

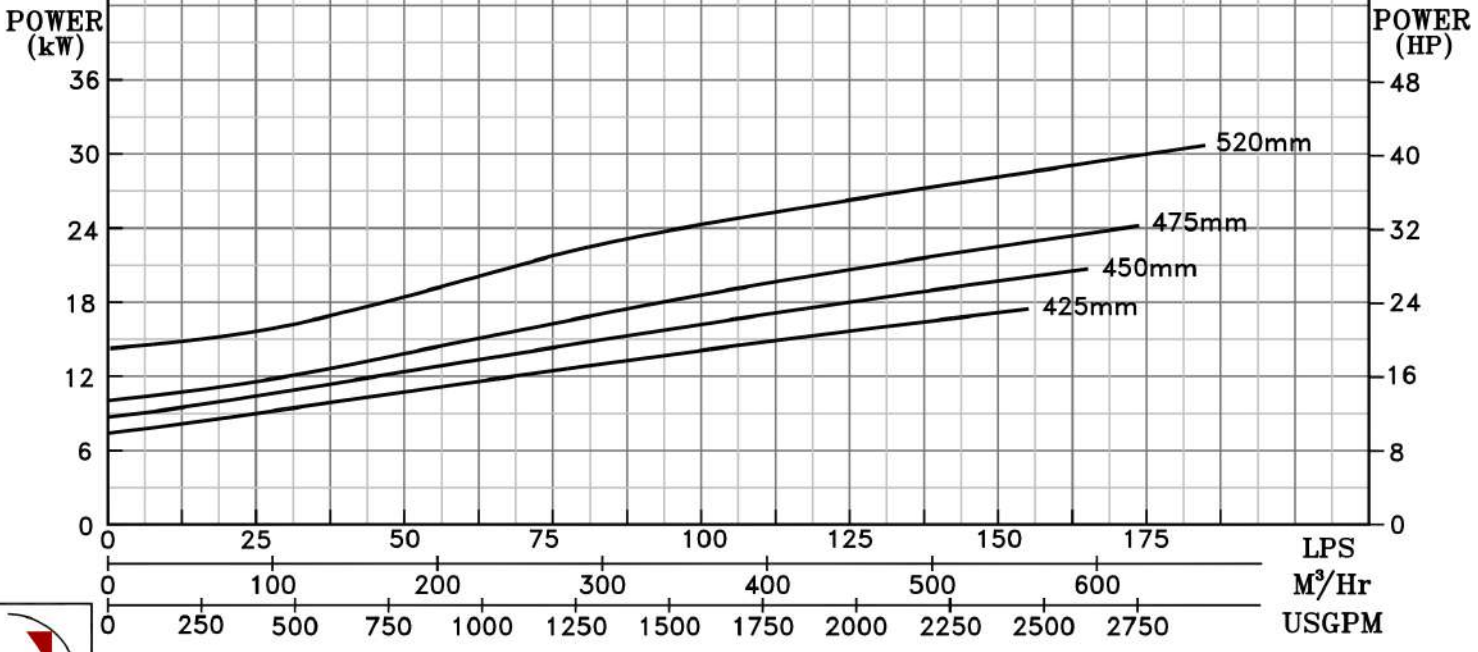

740 RPM