


NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B


PERFORMANCE CURVE OF 4SW13 @740 R.P.M		4SW13/X/600658	
<b>FISHER PUMP</b>	<b>MODEL 4SW13</b>	WORKING PRESS.	12 bar
	SIZE 125x100-320	TEST PRESS.	18 bar
	<b>SW RANGE</b>	TYPE - DRY PIT NON-CLOG SEWAGE PUMP	
	MAX. SPHERE SIZE - 30MM	SPEED 740 rpm	

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

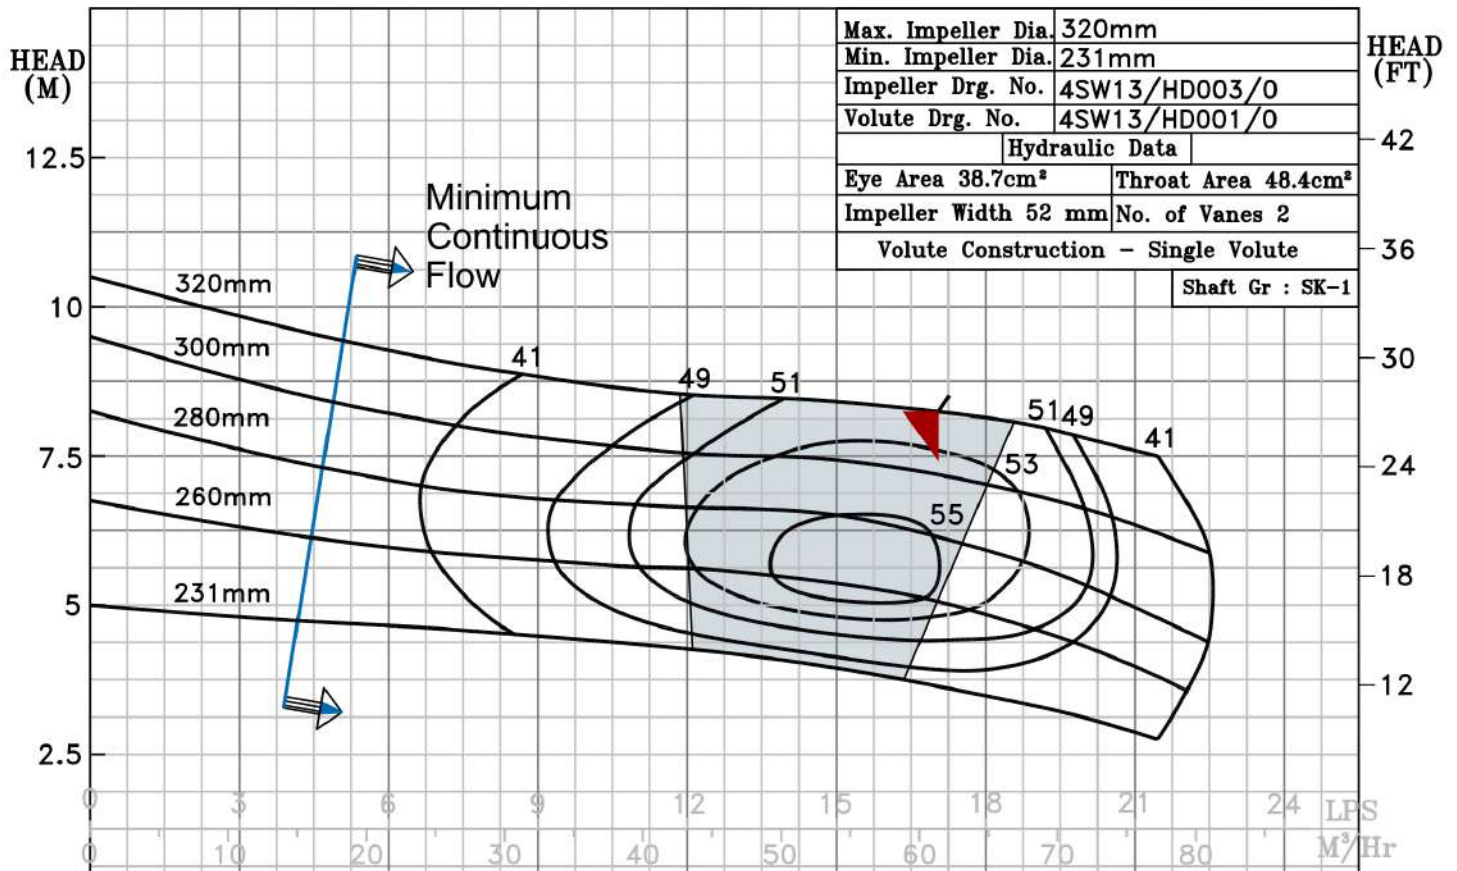

B.E.P Flow	61.25 M <sup>3</sup> /Hr.
B.E.P Head	8.17 M
Speed	740 R.P.M
Ns	1031 US UNITS

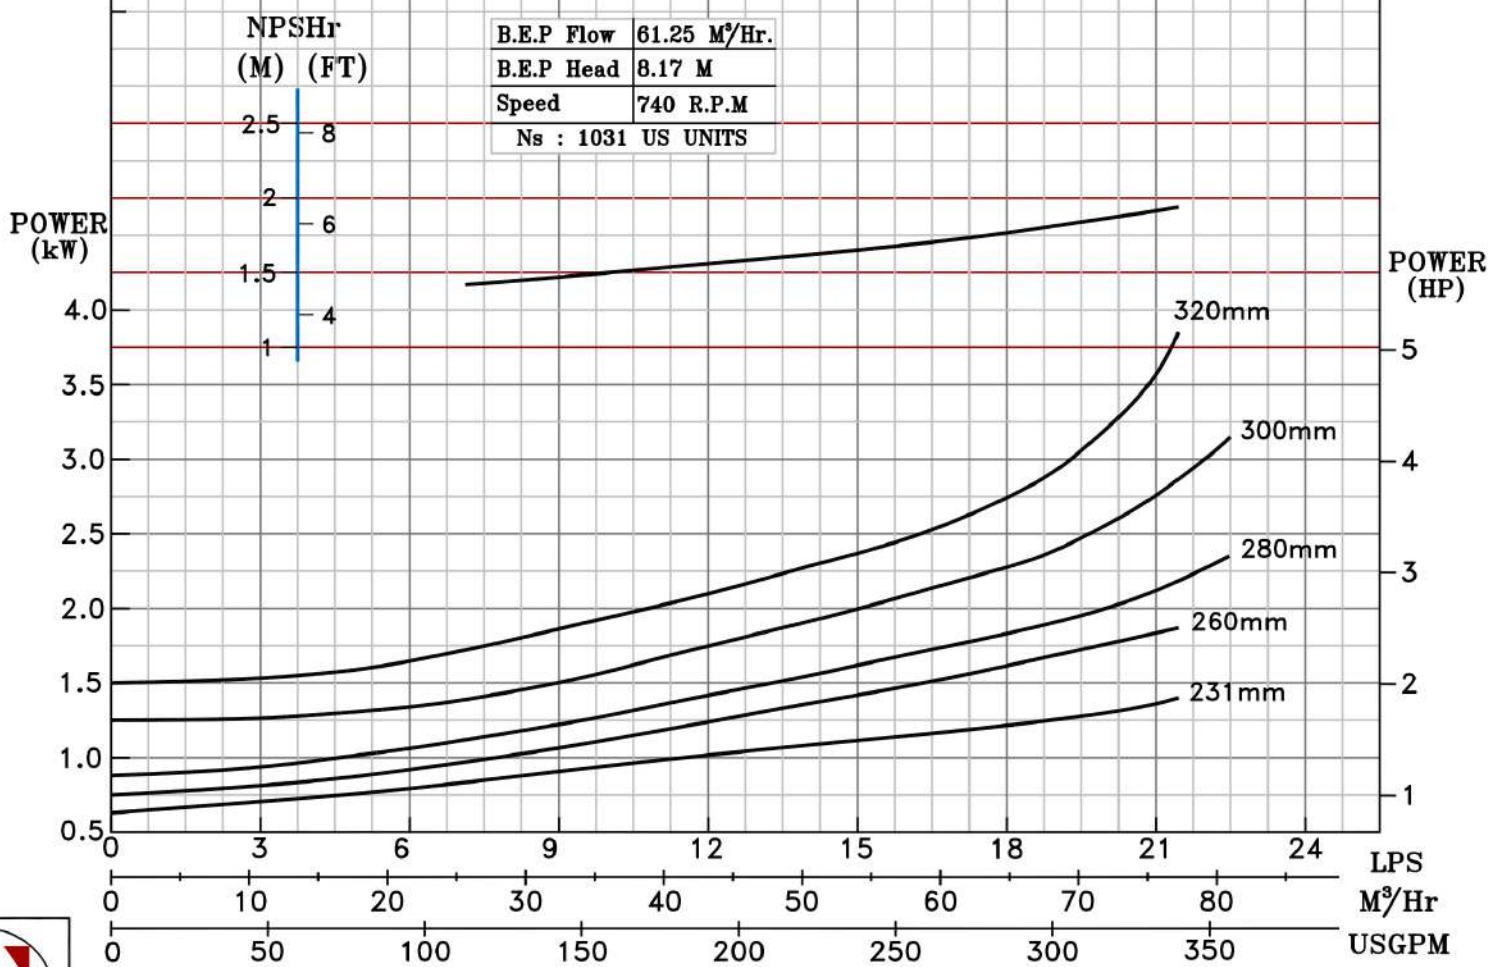

740 RPM