



NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 8SW20 @740 R.P.M		8SW20/X/602058	
FISHER PUMP	MODEL 8SW20	WORKING PRESS.	16 bar
	SIZE 250X200-510	TEST PRESS.	24 bar
	TYPE-DRY PIT NON-CLOG SEWAGE PUMP		
<i>SW RANGE</i>	MAX. SPHERE SIZE - 90MM	SPEED 740 rpm	

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE
 PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G. 1.0

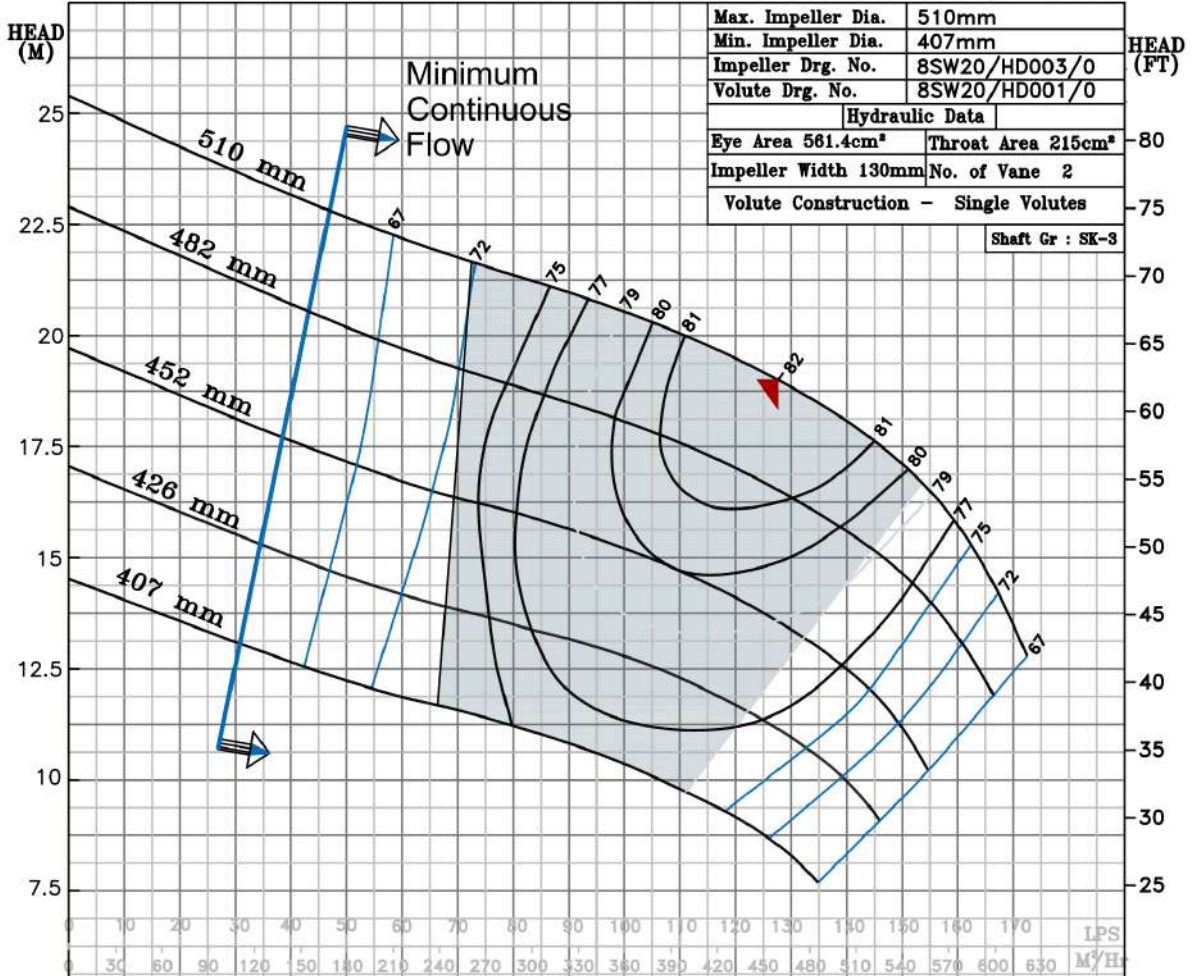

Max. Impeller Dia.	510mm
Min. Impeller Dia.	407mm
Impeller Drg. No.	8SW20/HD003/0
Volute Drg. No.	8SW20/HD001/0
Hydraulic Data	
Eye Area 561.4cm ²	Throat Area 215cm ²
Impeller Width 130mm	No. of Vane 2
Volute Construction - Single Volute	
Shaft Gr : SK-3	

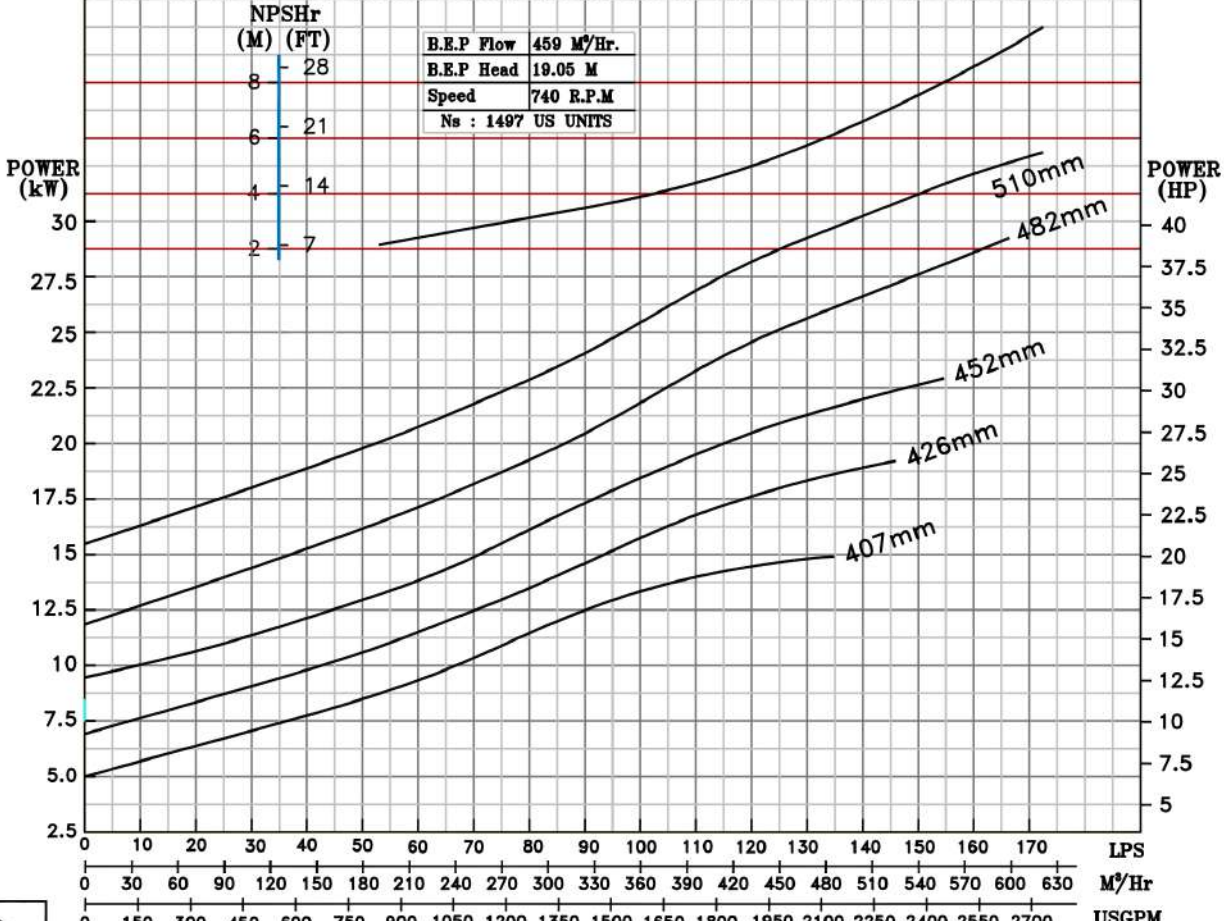

740 RPM