

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 2HST13 @1450 R.P.M

2HST13/X/100254

FISHER PUMP

MODEL 2HST13

WORKING PRESS. 16 bar

SIZE 65x50-325

TEST PRESS. 24 bar

HS RANGE

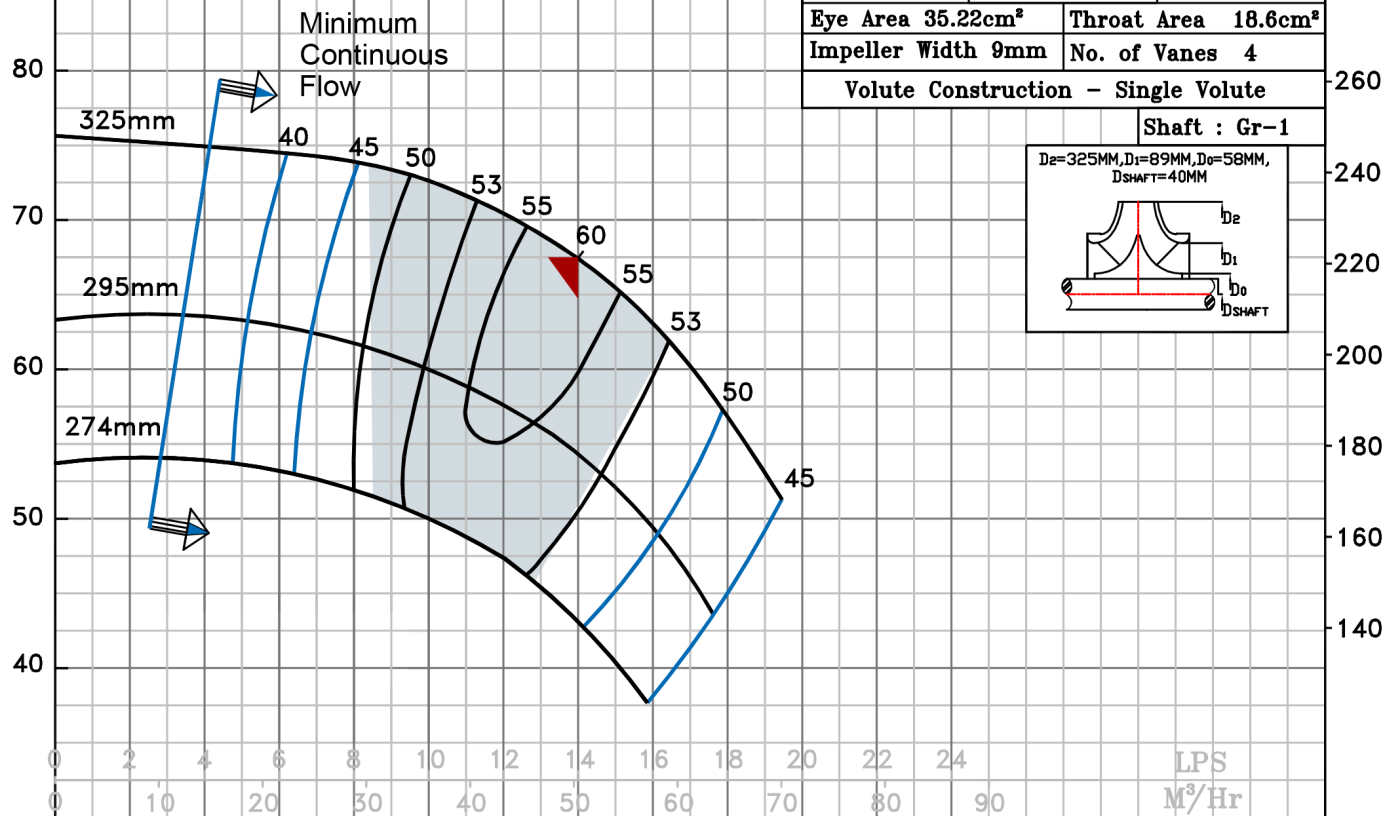
TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 1450 rpm

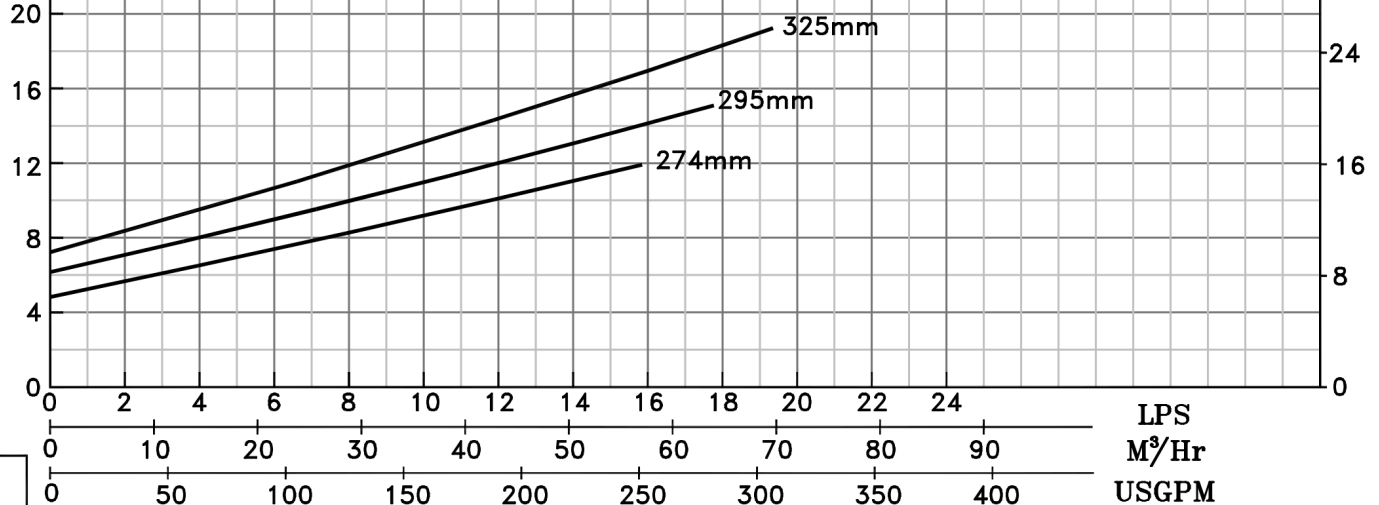
DATE - 18/01/18

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

HEAD
(M)HEAD
(FT)NPSH_r
(m) (ft)

B.E.P Flow	50 M³/Hr.
B.E.P Head	33.75 M
Speed	1450 R.P.M
Ns : 630 US UNITS	

POWER
(kW)POWER
(HP)

1450 RPM