

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 8HSTD26 @1480 R.P.M

8HSTD26/X/302154

FISHER PUMP

HST RANGE

MODEL 8HSTD26

WORKING PRESS. 35 bar

SIZE 250x200-662

TEST PRESS. 52.5 bar


TYPE-AXIALLY SPLIT CASE TWO STAGE

SPEED 1480 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE



DATE - 10.12.14

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

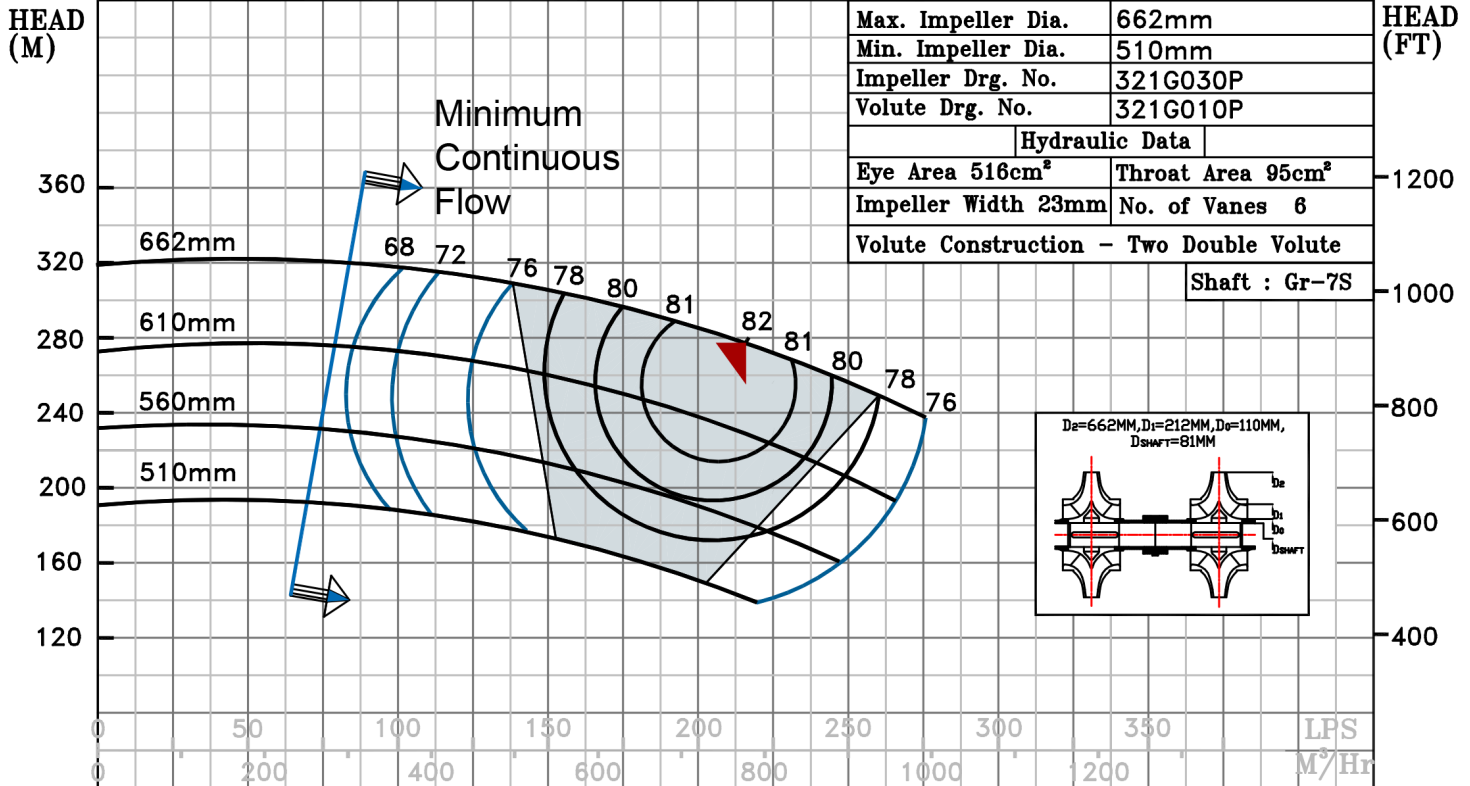

B.E.P Flow	777 M ³ /Hr.
B.E.P Head	277.2 M
Speed	1480 R.P.M
N _s : 880 US UNITS	

NPSH_r
(M) (FT)

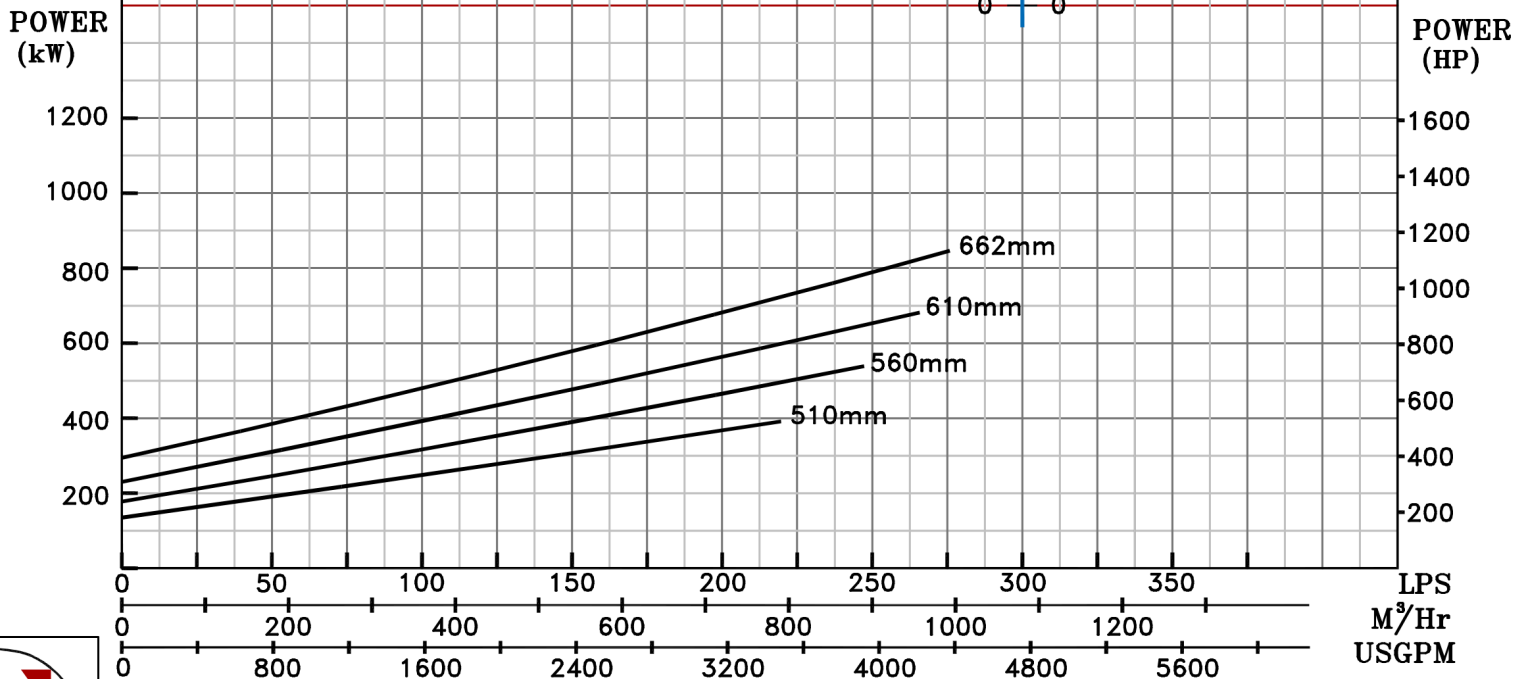

1480 RPM