

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 10HS22 @740 R.P.M

10HS22/Y/103758

FISHER PUMP

HS RANGE

MODEL 10HS22

WORKING PRESS 10 bar

SIZE 300x250-568


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 740 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

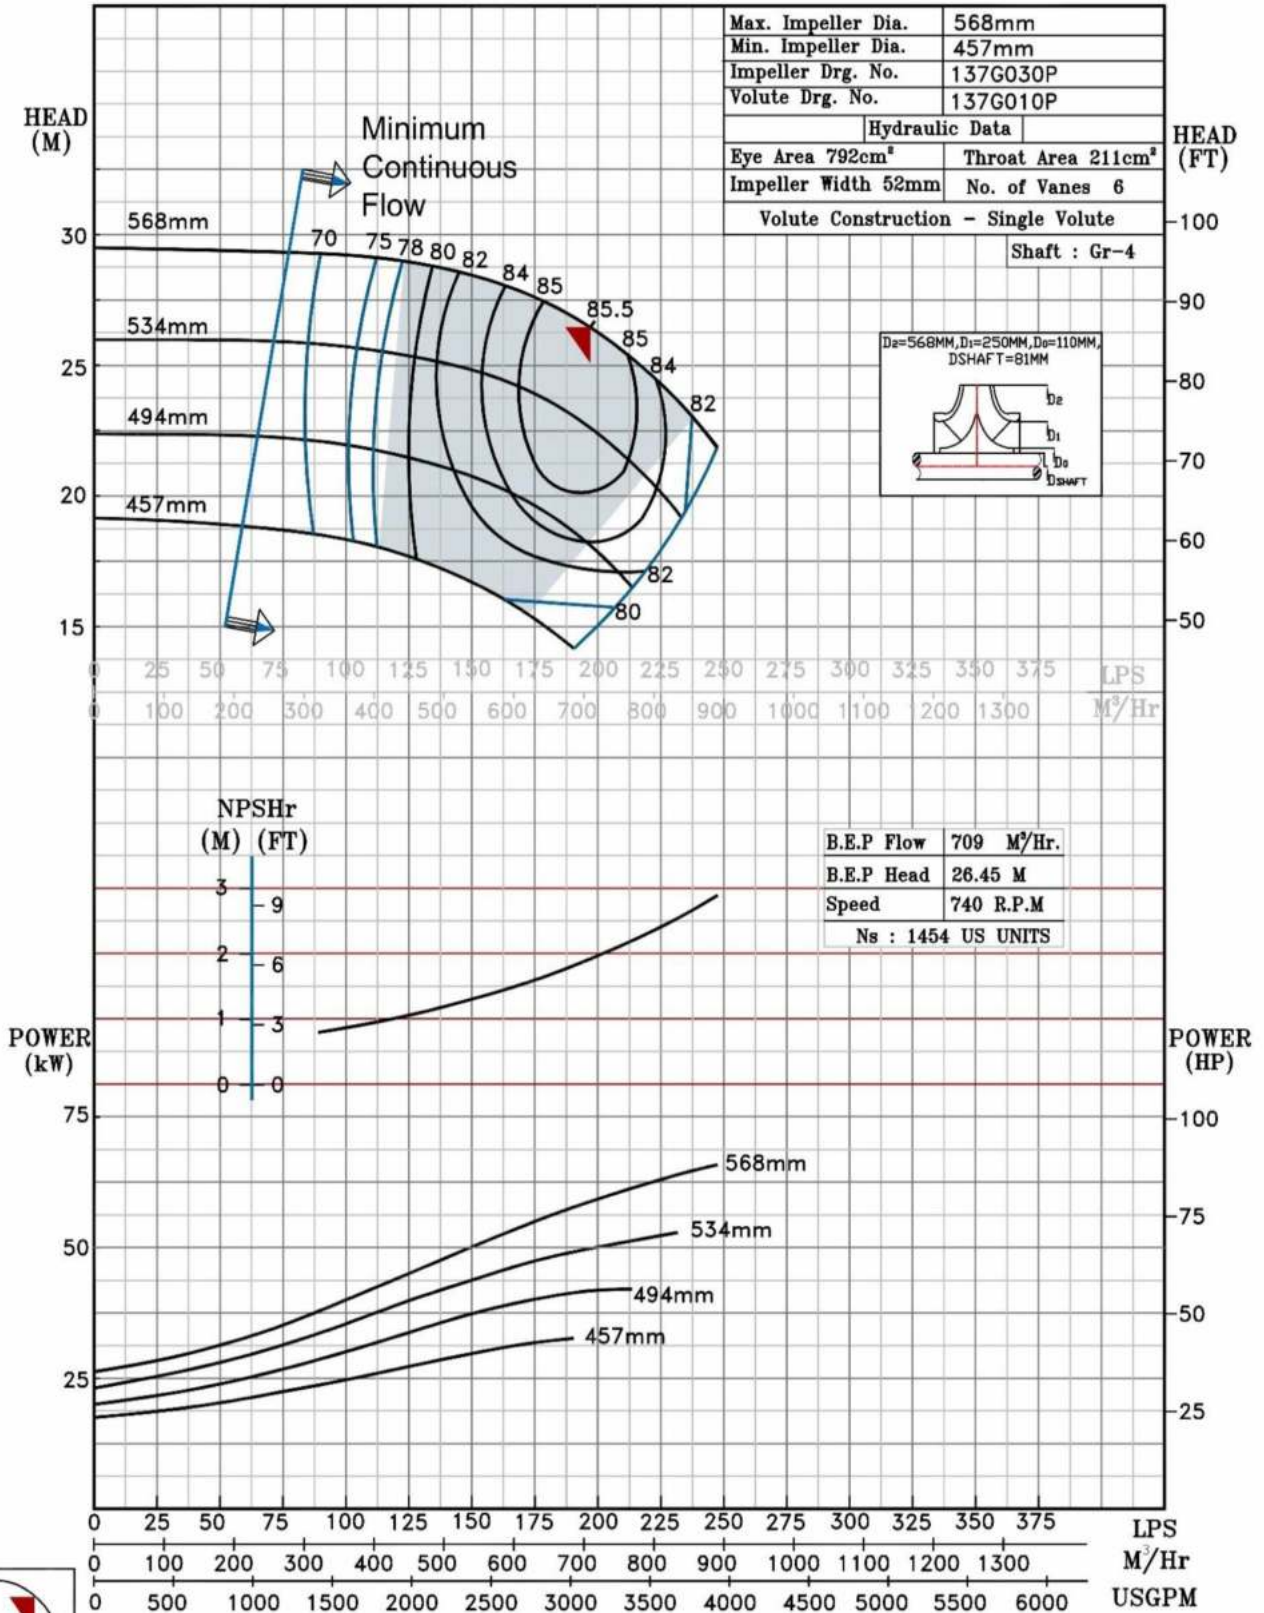

740 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 10HS27 @740 R.P.M

10HS27/X/103858

FISHER PUMP

HS RANGE

MODEL 10HS27

WORKING PRESS 10 bar

SIZE 300x250-690


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 740 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

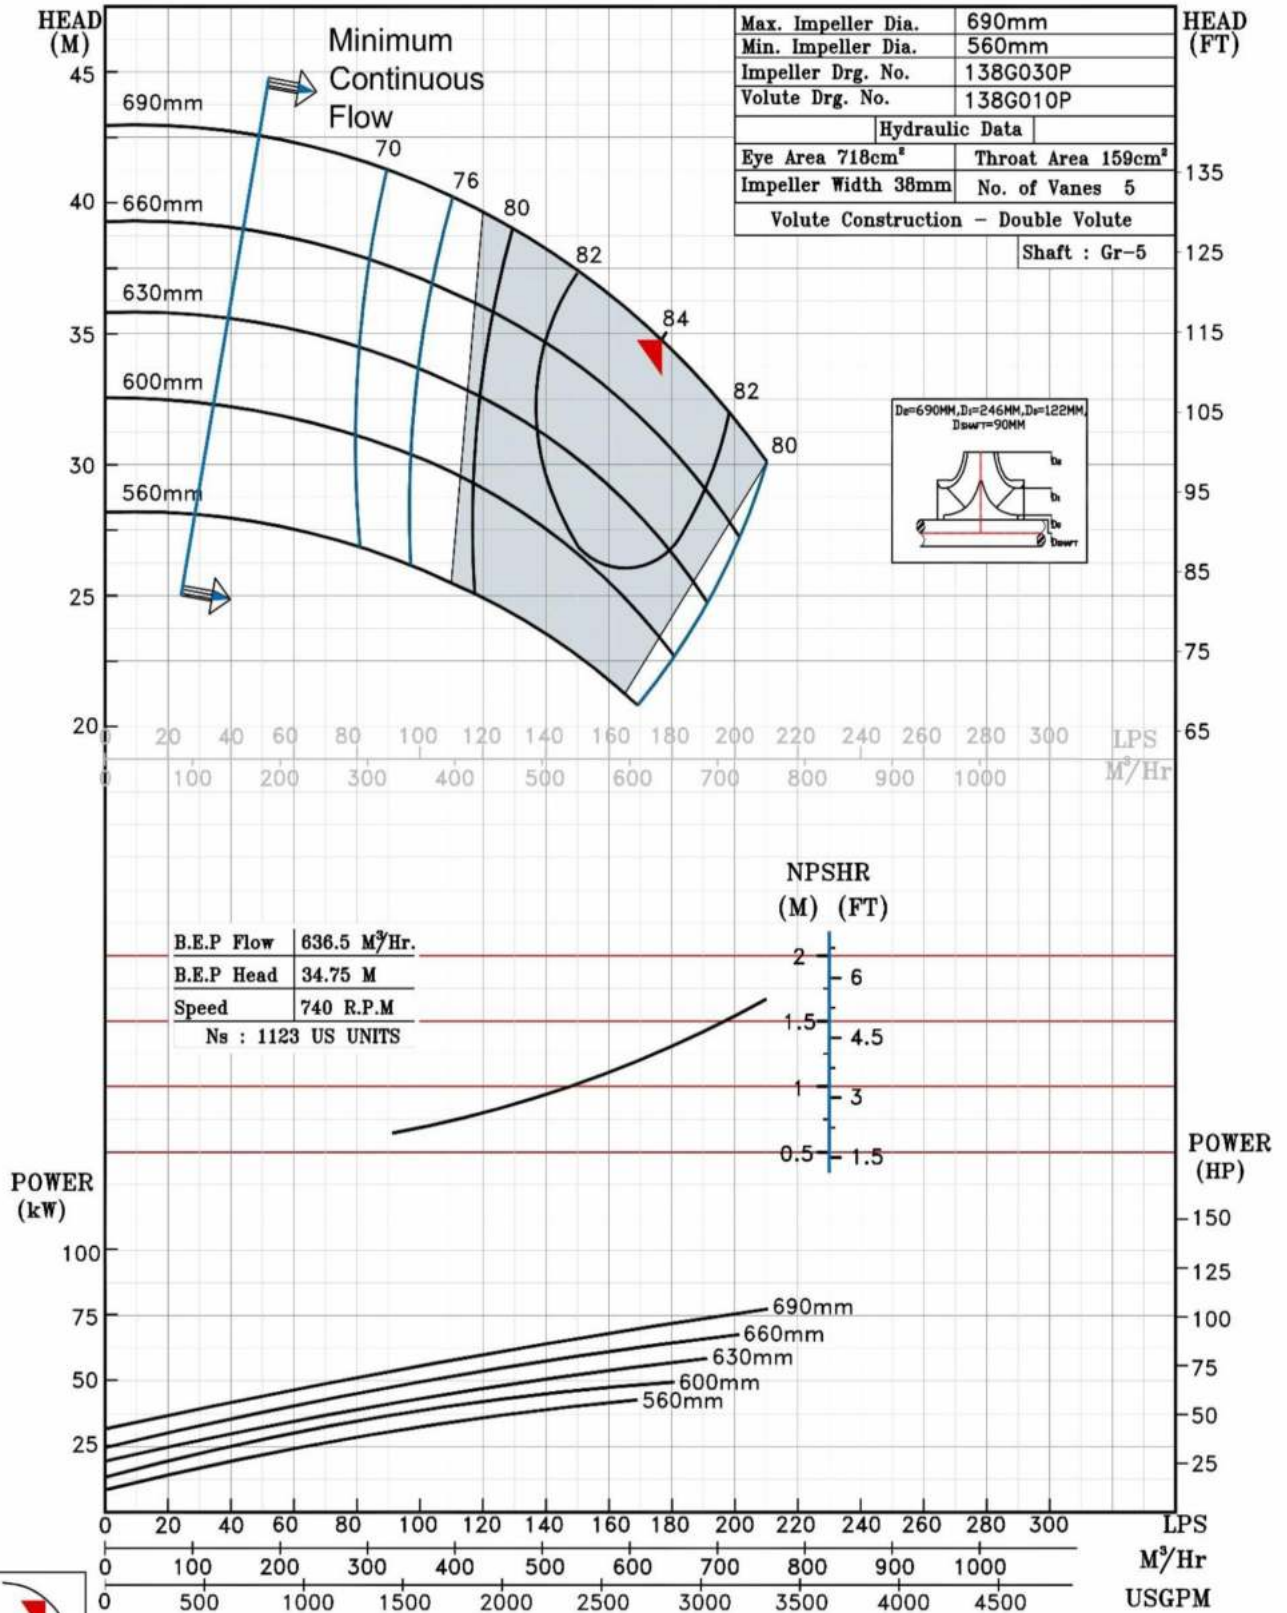

740 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 12HS13 @740 R.P.M

12HS13/X/103958

FISHER PUMP

HS RANGE

MODEL 12HS13

WORKING PRESS. 16 bar

SIZE 350x300-325


TEST PRESS. 24 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 740 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

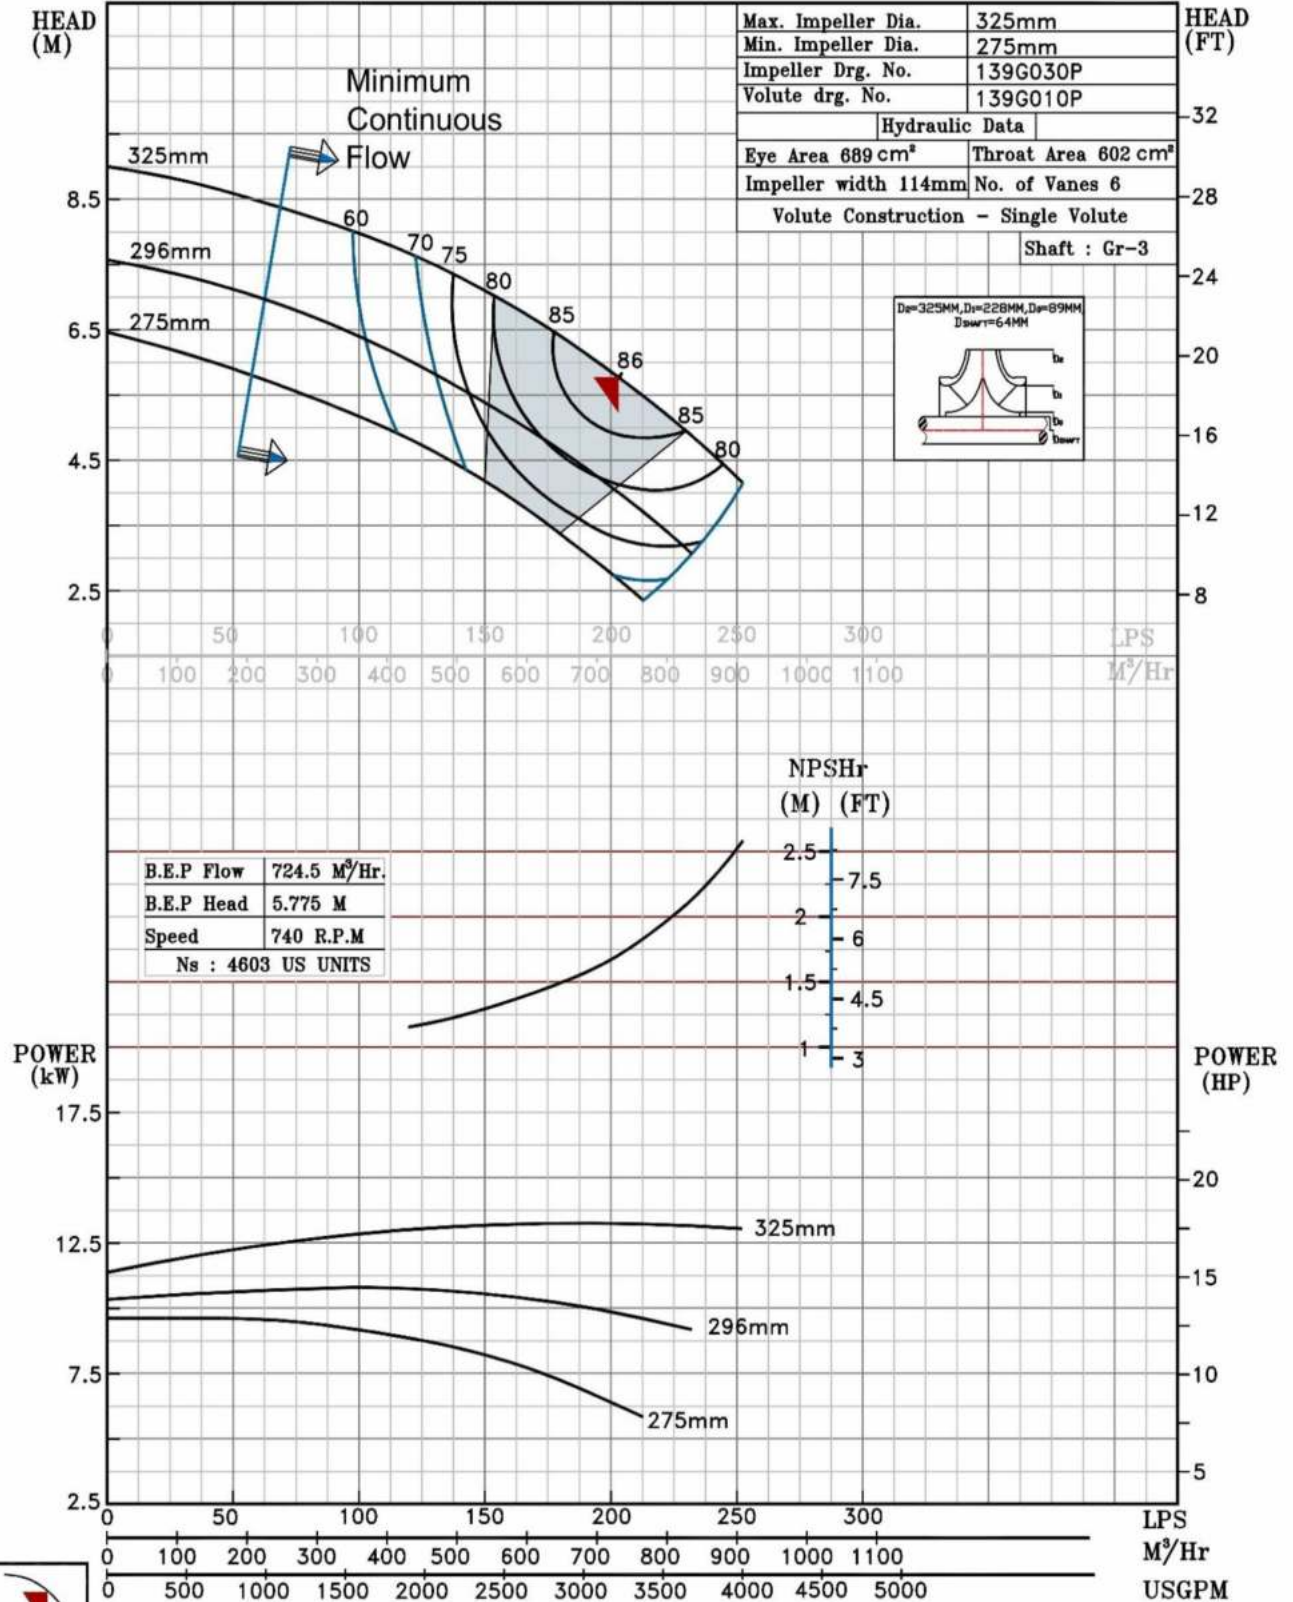

740 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 12HS15 @740 R.P.M

12HS15/X/104058

FISHER PUMP

HS RANGE

MODEL 12HS15

WORKING PRESS. 10 bar

SIZE 350x300-380


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 740 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G. 1.0

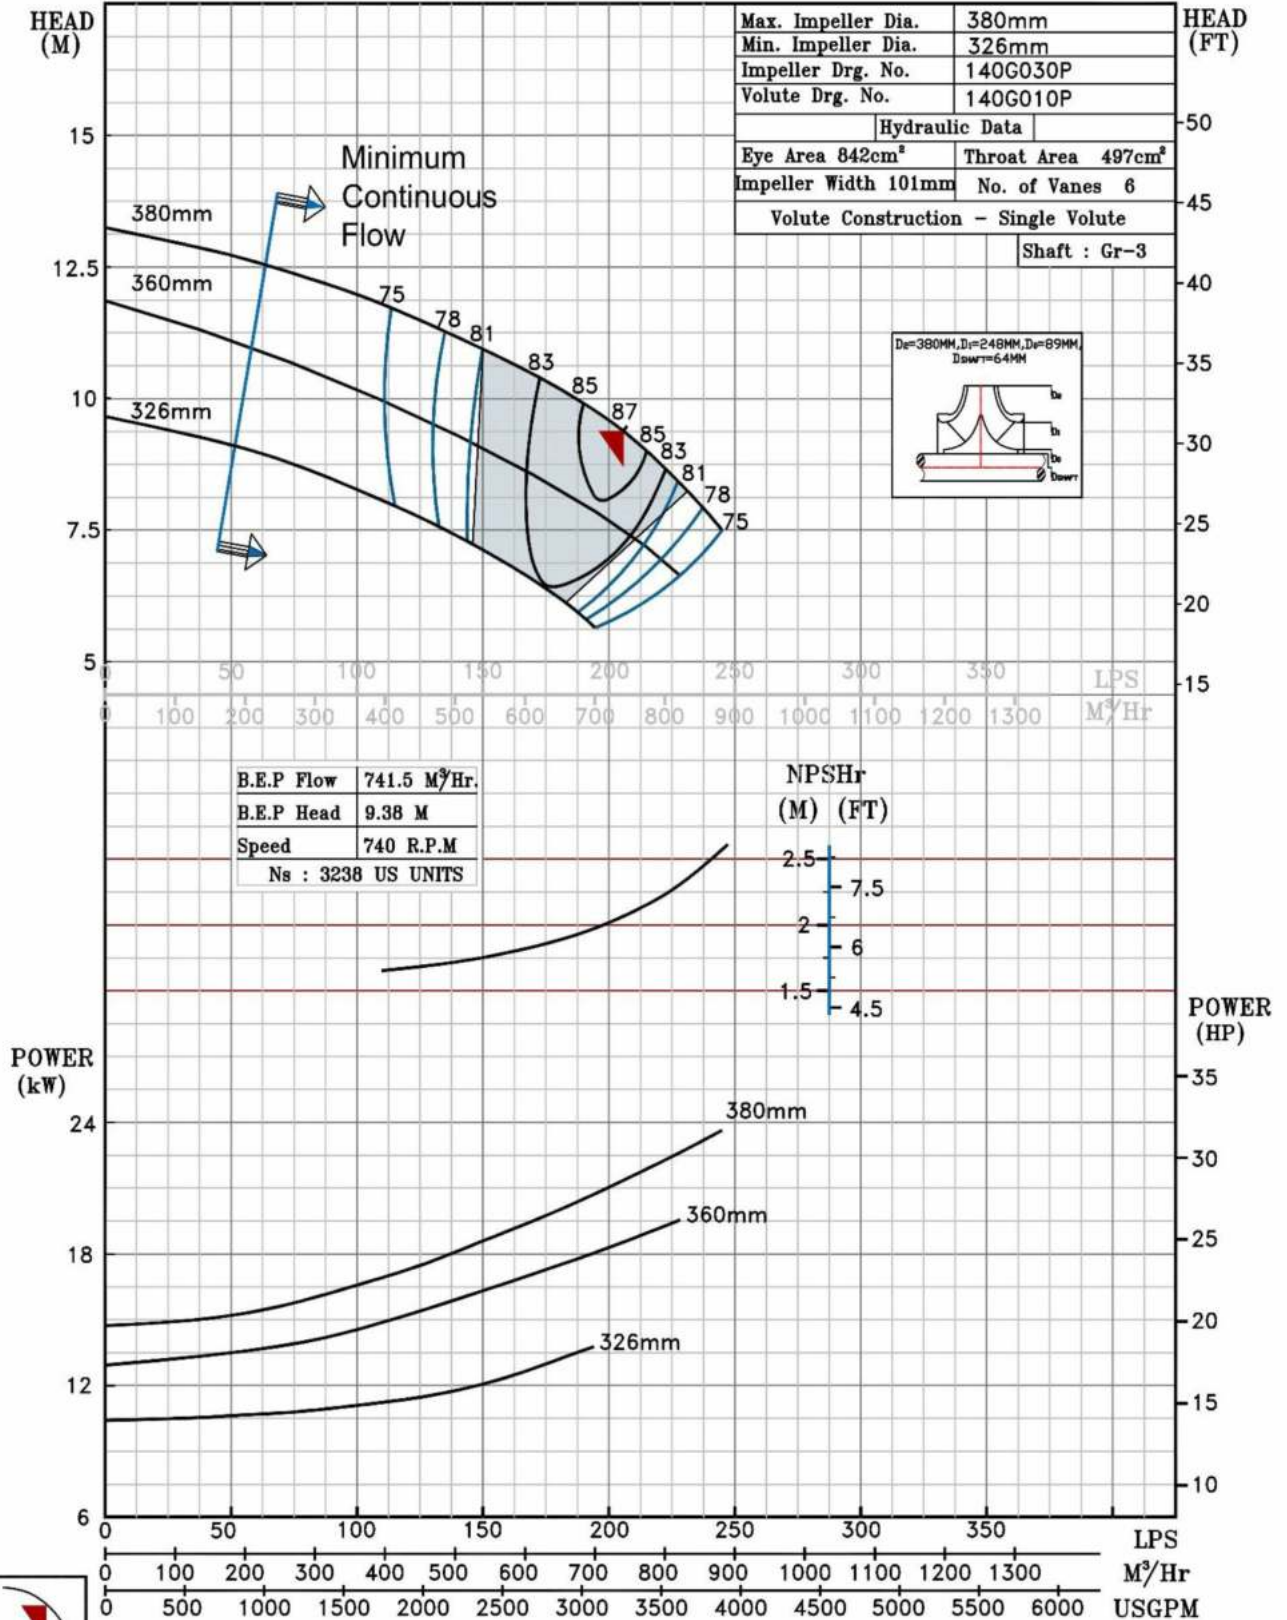

740 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 12HS16 @740 R.P.M

12HS16/X/104158

FISHER PUMP

HS RANGE

MODEL 12HS16

WORKING PRESS. 10 bar

SIZE 400x300-396


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 740 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

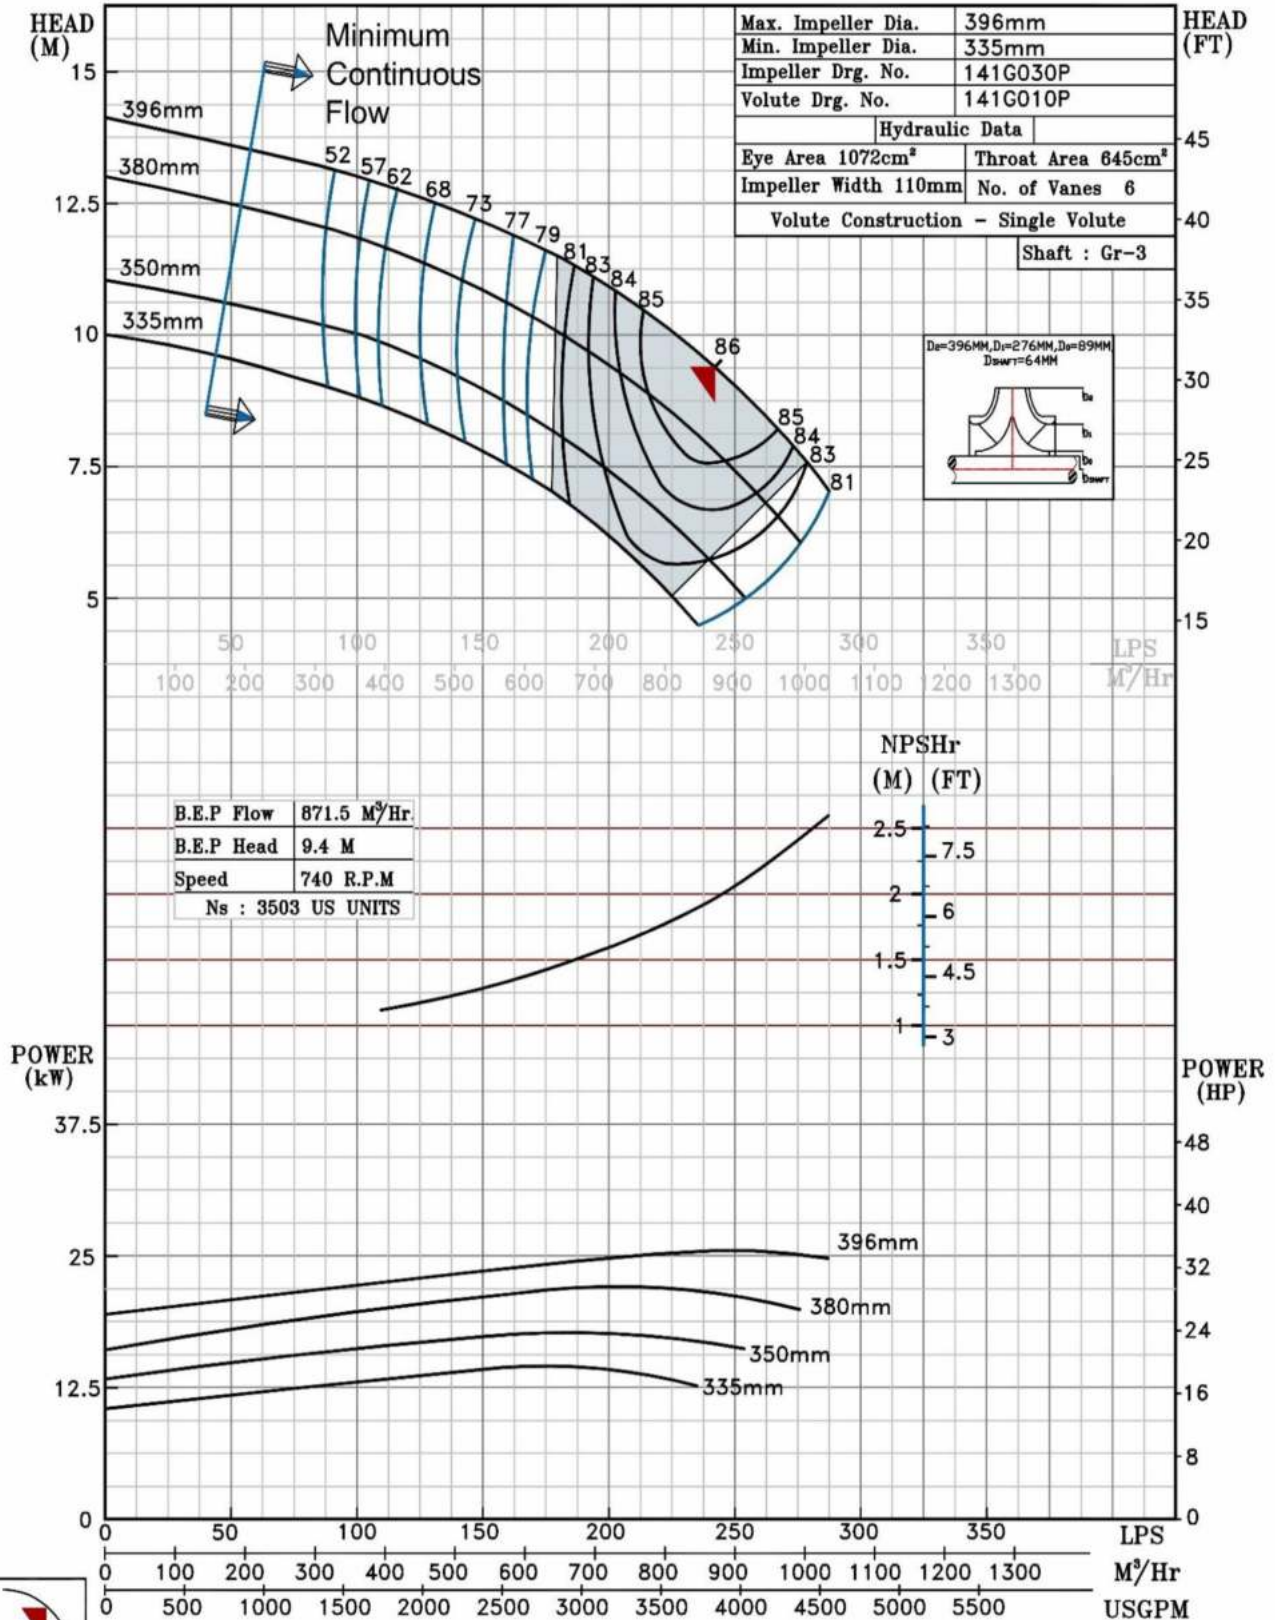

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 12HS18 @740 R.P.M

12HS18/Y/104258

FISHER PUMP

HS RANGE

MODEL 12HS18

WORKING PRESS 10 bar

SIZE 350x300-462


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE



SPEED 740 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

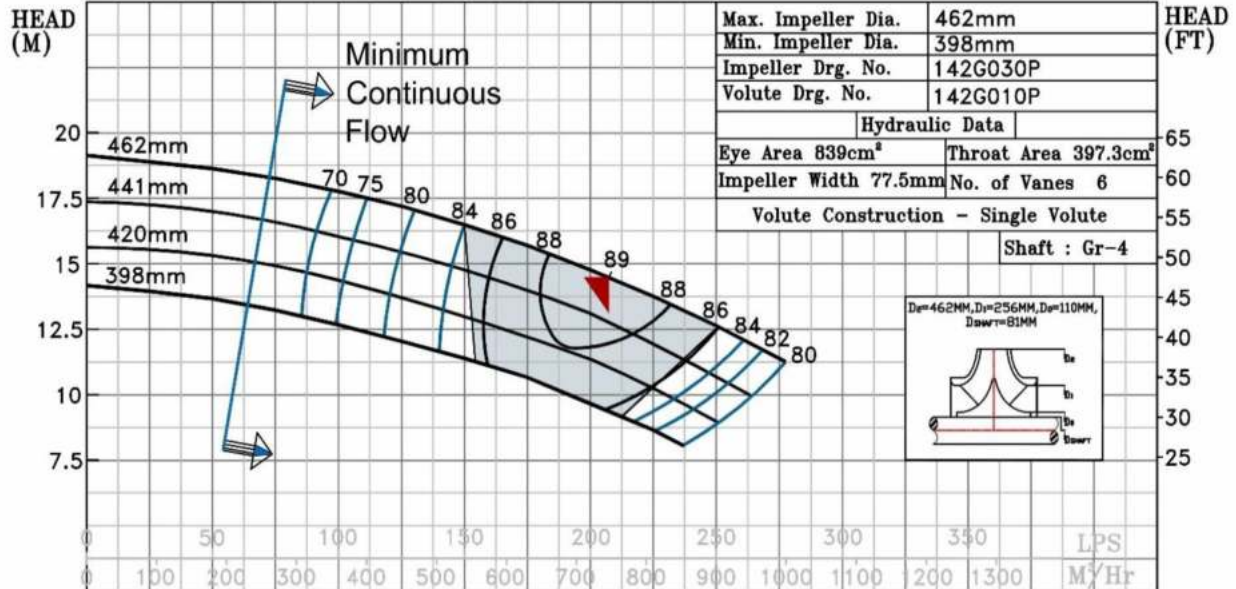

B.E.P Flow	747 M³/Hr.
B.E.P Head	14.5 M
Speed	740 R.P.M
Ns : 2343 US UNITS	

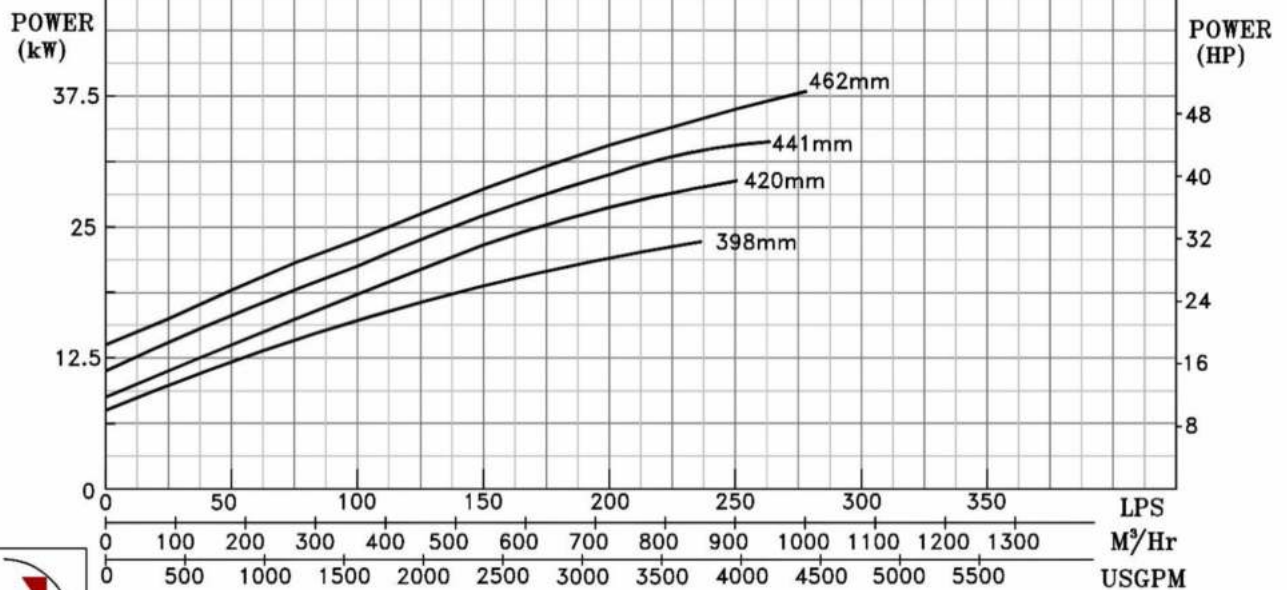

740 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 12HS22 @740 R.P.M

12HS22/X/104358

FISHER PUMP

HS RANGE

MODEL 12HS22

WORKING PRESS. 10 bar

SIZE 350x300-555.5


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 740 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G. 1.0

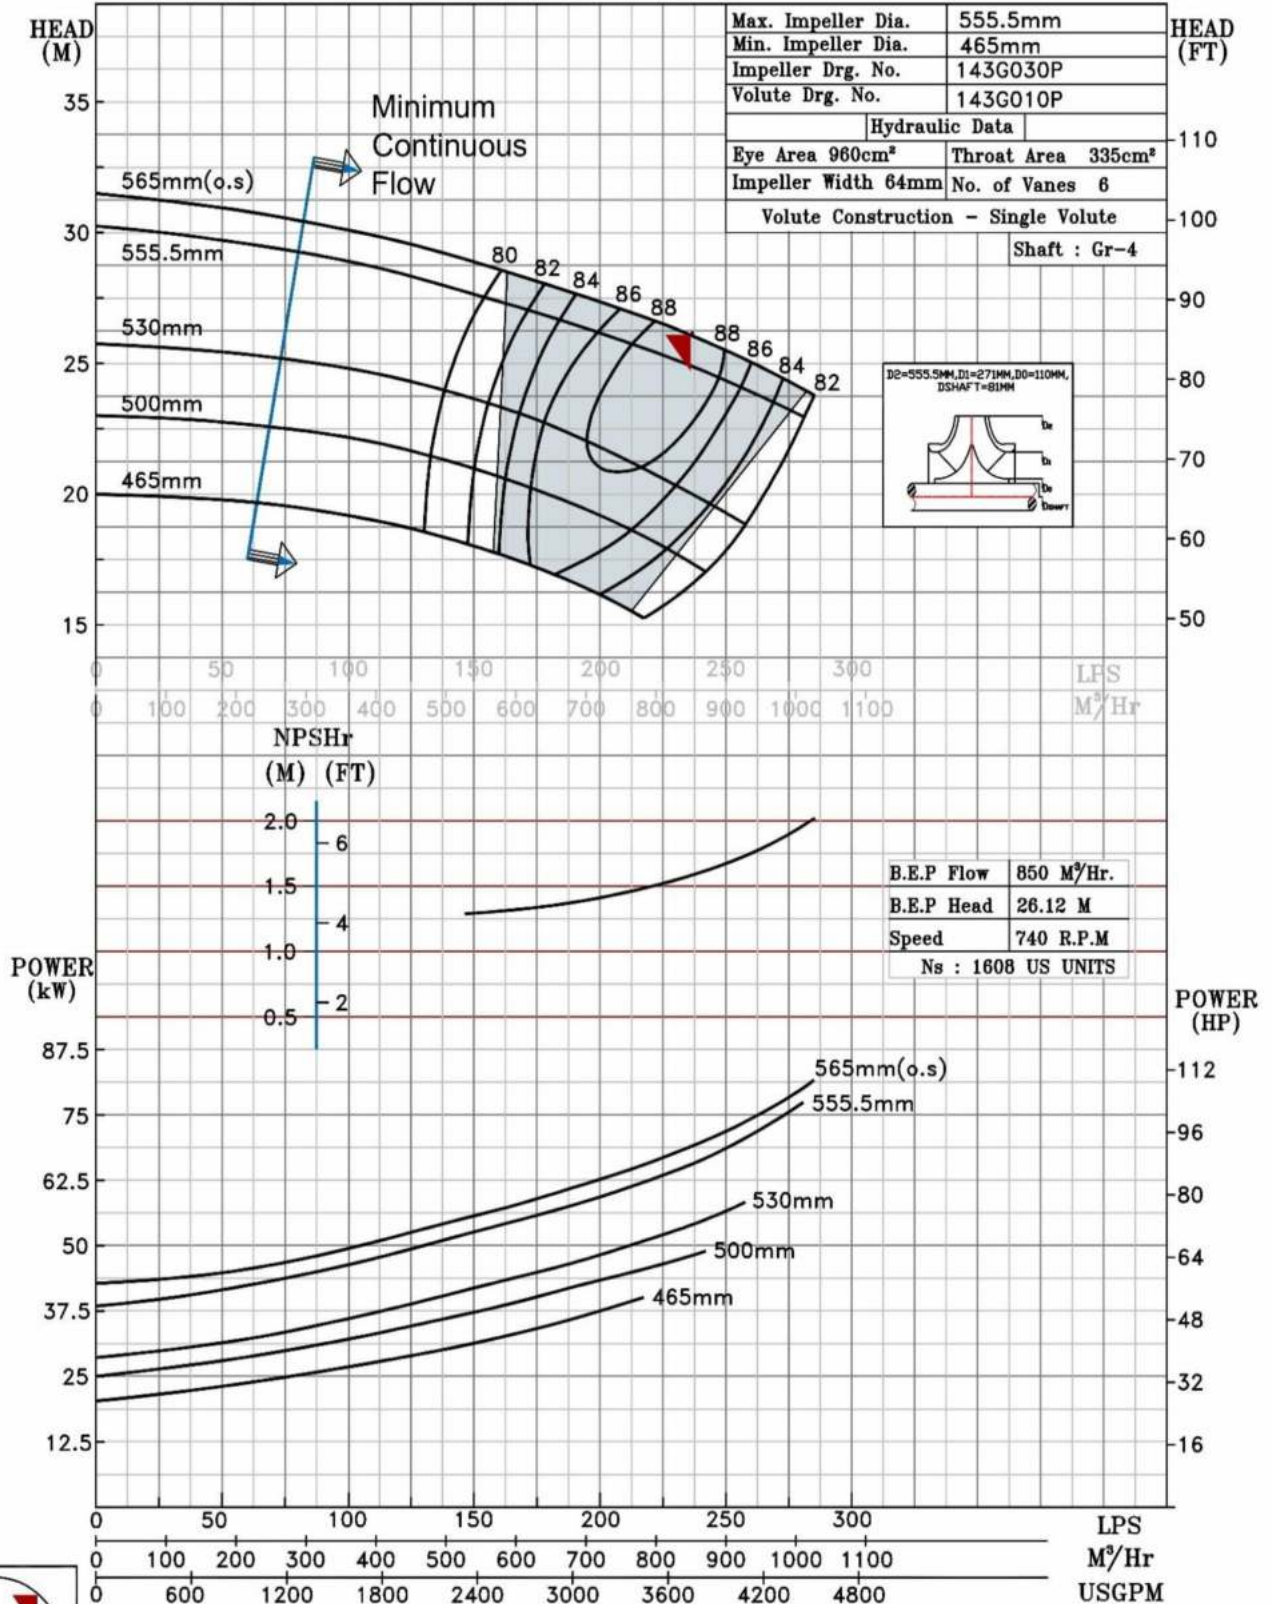

740 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 12HS23 @740 R.P.M

12HS23/X/104458

FISHER PUMP

HS RANGE

MODEL 12HS23

WORKING PRESS. 10 bar

SIZE 350x300-595


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 740 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

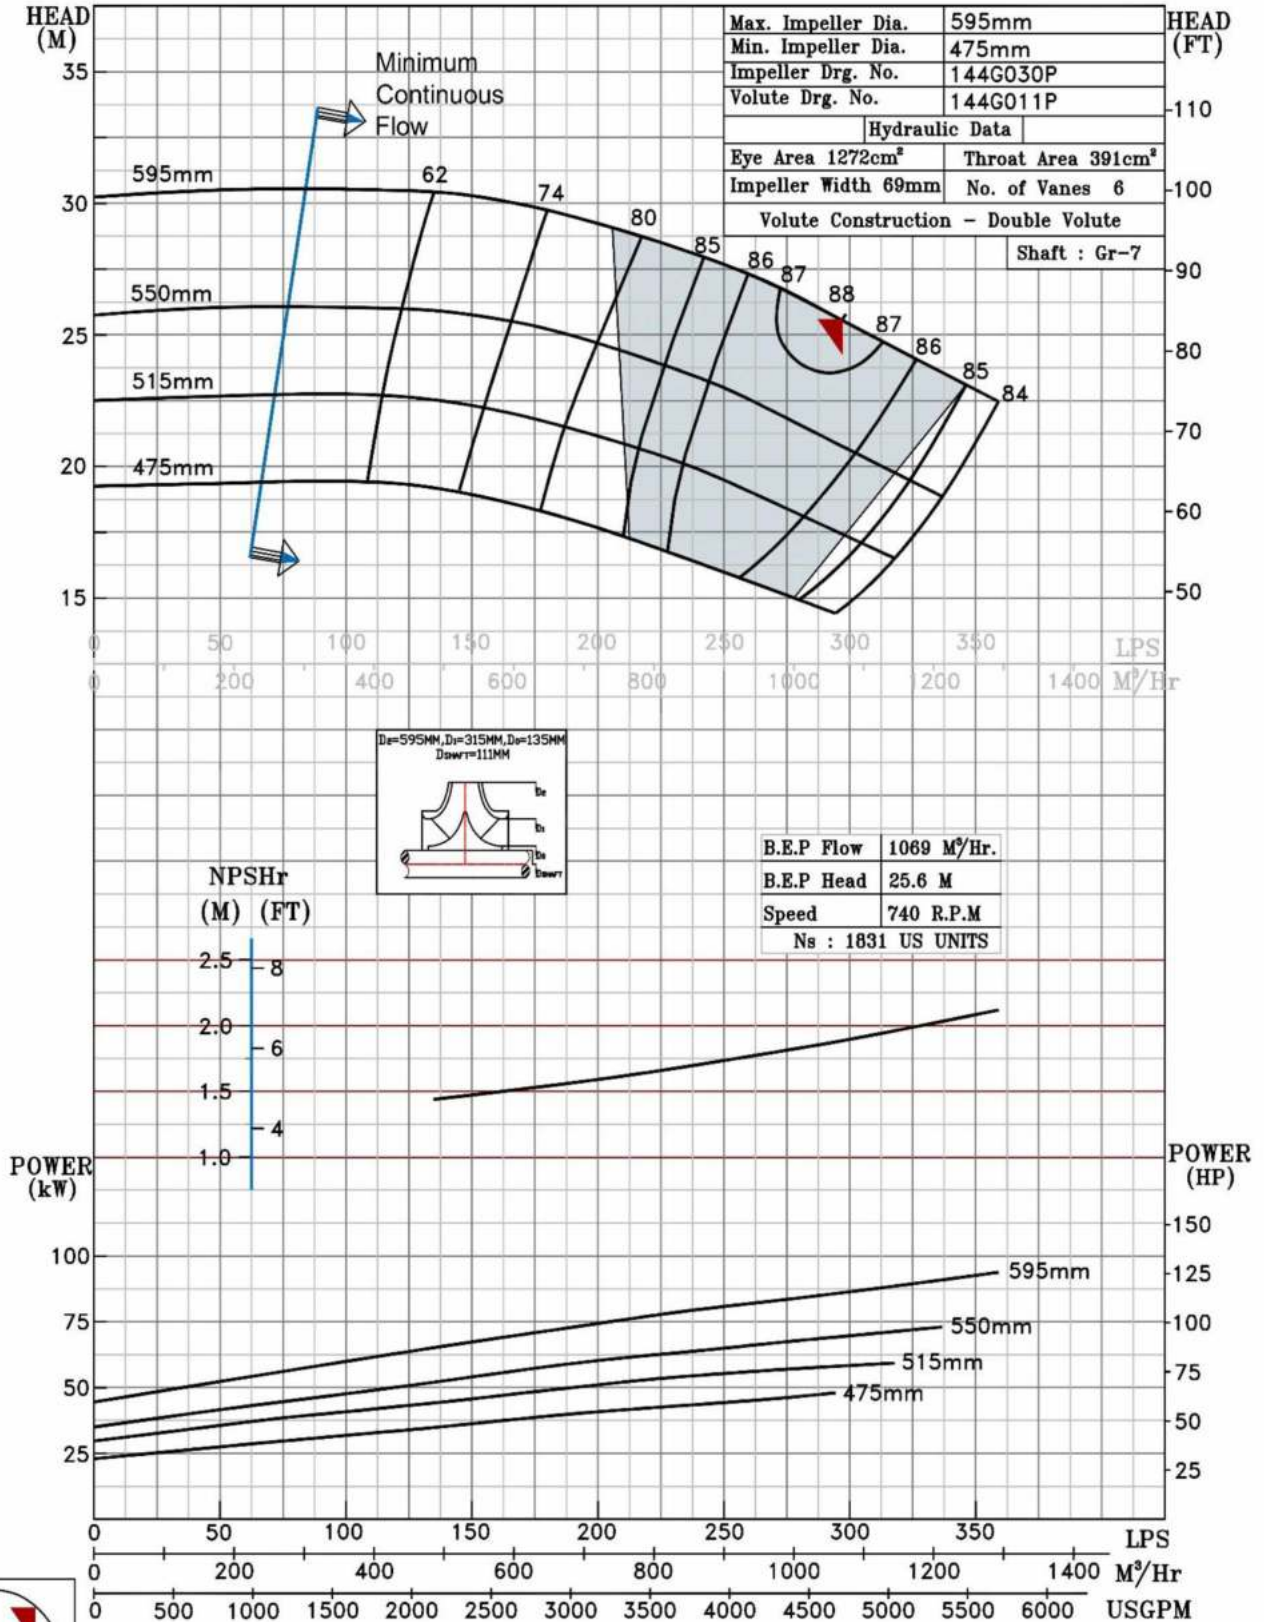

740 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 12HS26 @740 R.P.M

12HS26/X/104558

FISHER PUMP

HS RANGE

MODEL 12HS26

WORKING PRESS 10 bar

SIZE 350x300-660


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 740 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

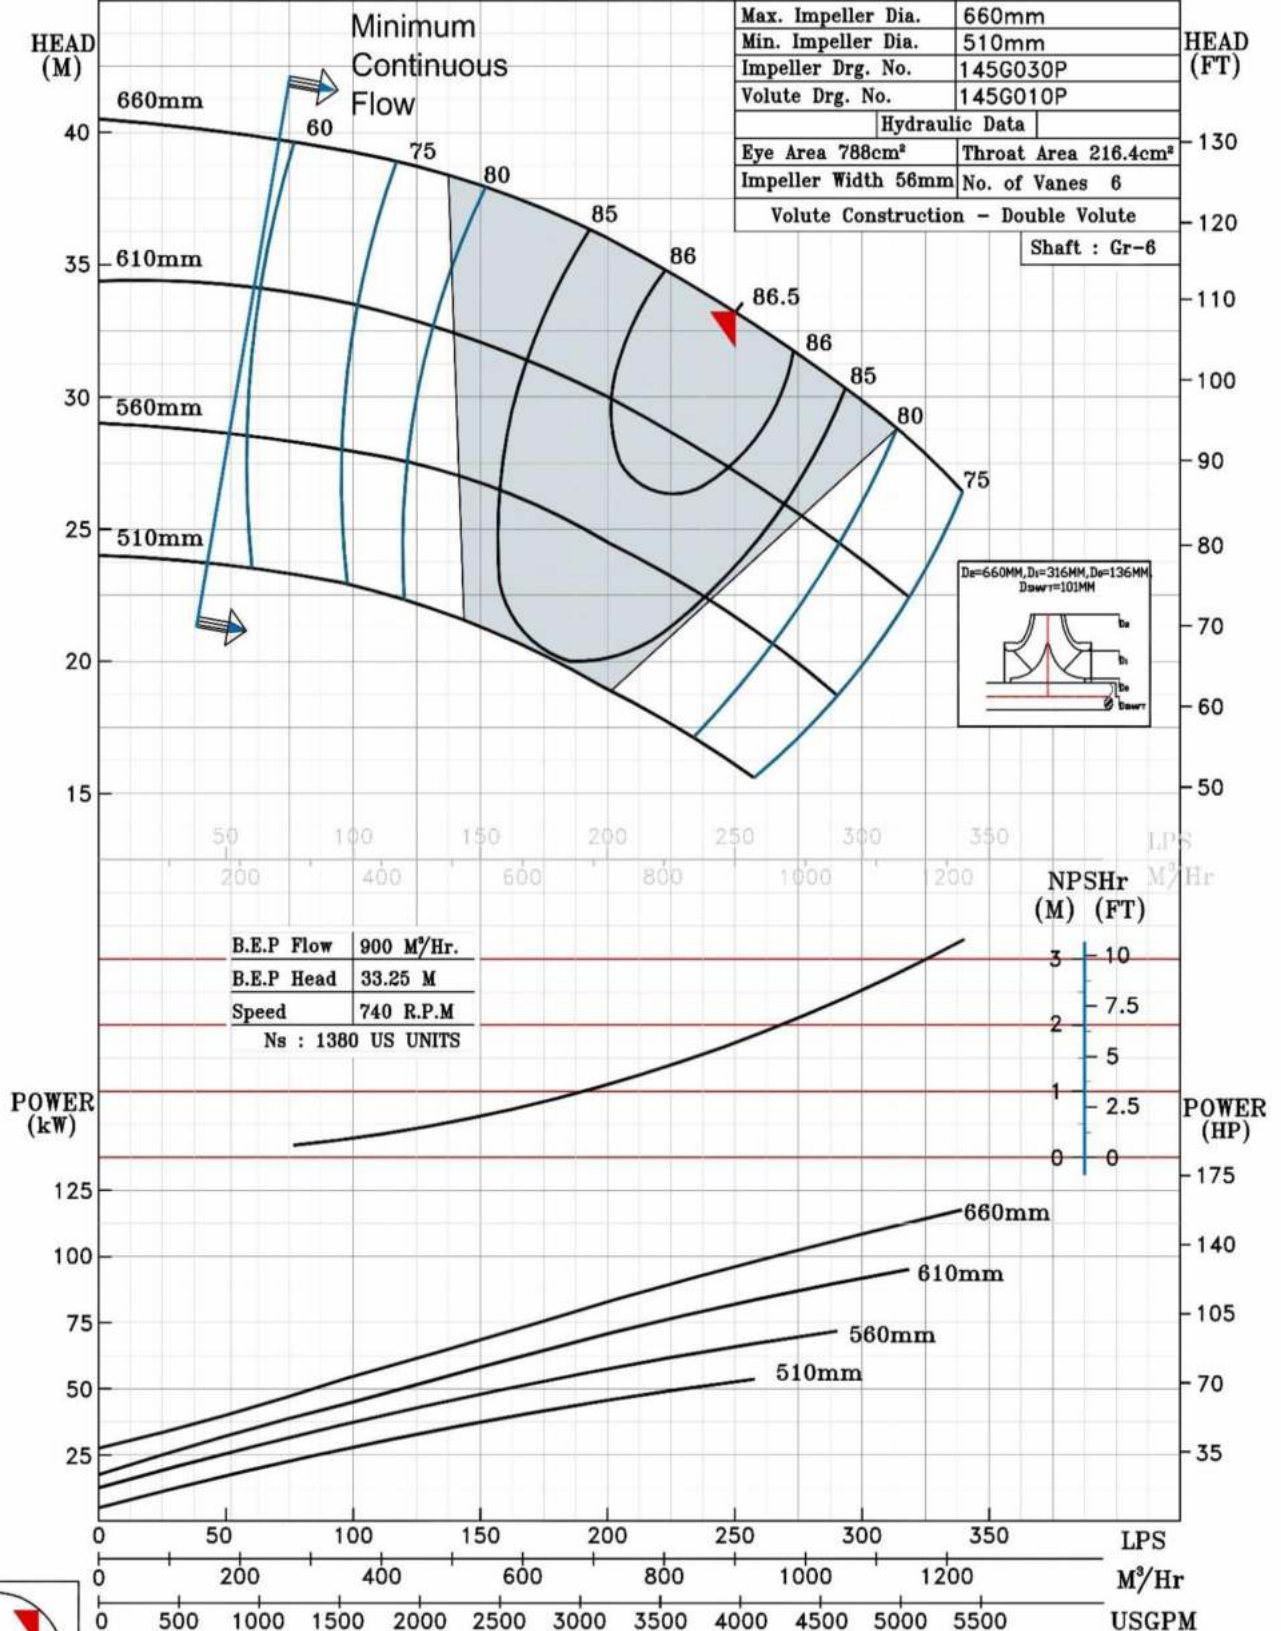

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 14HS16 @740 R.P.M

14HS16/Y/114658


FISHER PUMP

HS RANGE

MODEL 14HS16	WORKING PRESS.	10 bar
SIZE 400X350-459	TEST PRESS.	15 bar
TYPE-AXIALLY SPLIT CASE SINGLE STAGE		
SPEED 740 rpm		

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

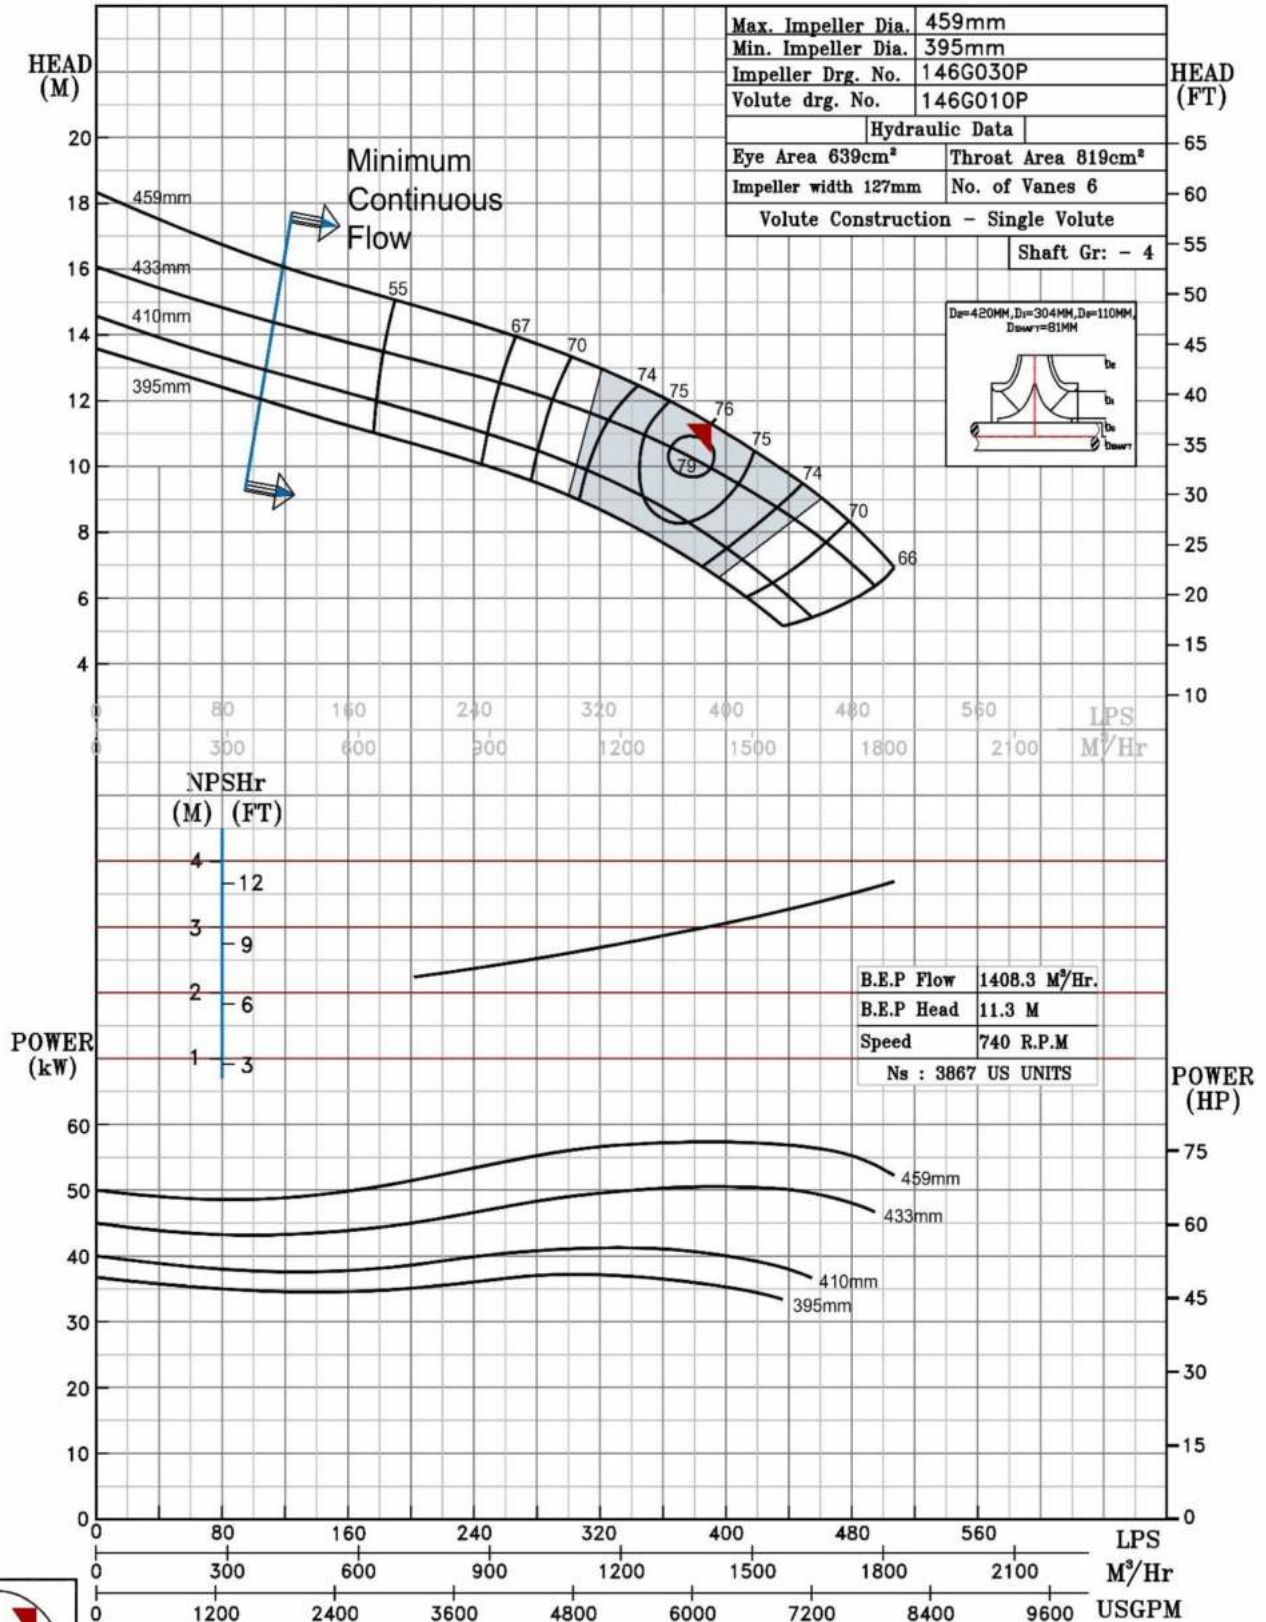

740 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 14HS19 @740 R.P.M

14HS19/X/104758

FISHER PUMP

HS RANGE

MODEL 14HS19

WORKING PRESS. 10 bar

SIZE 450x350-475


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 740 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G. 1.0

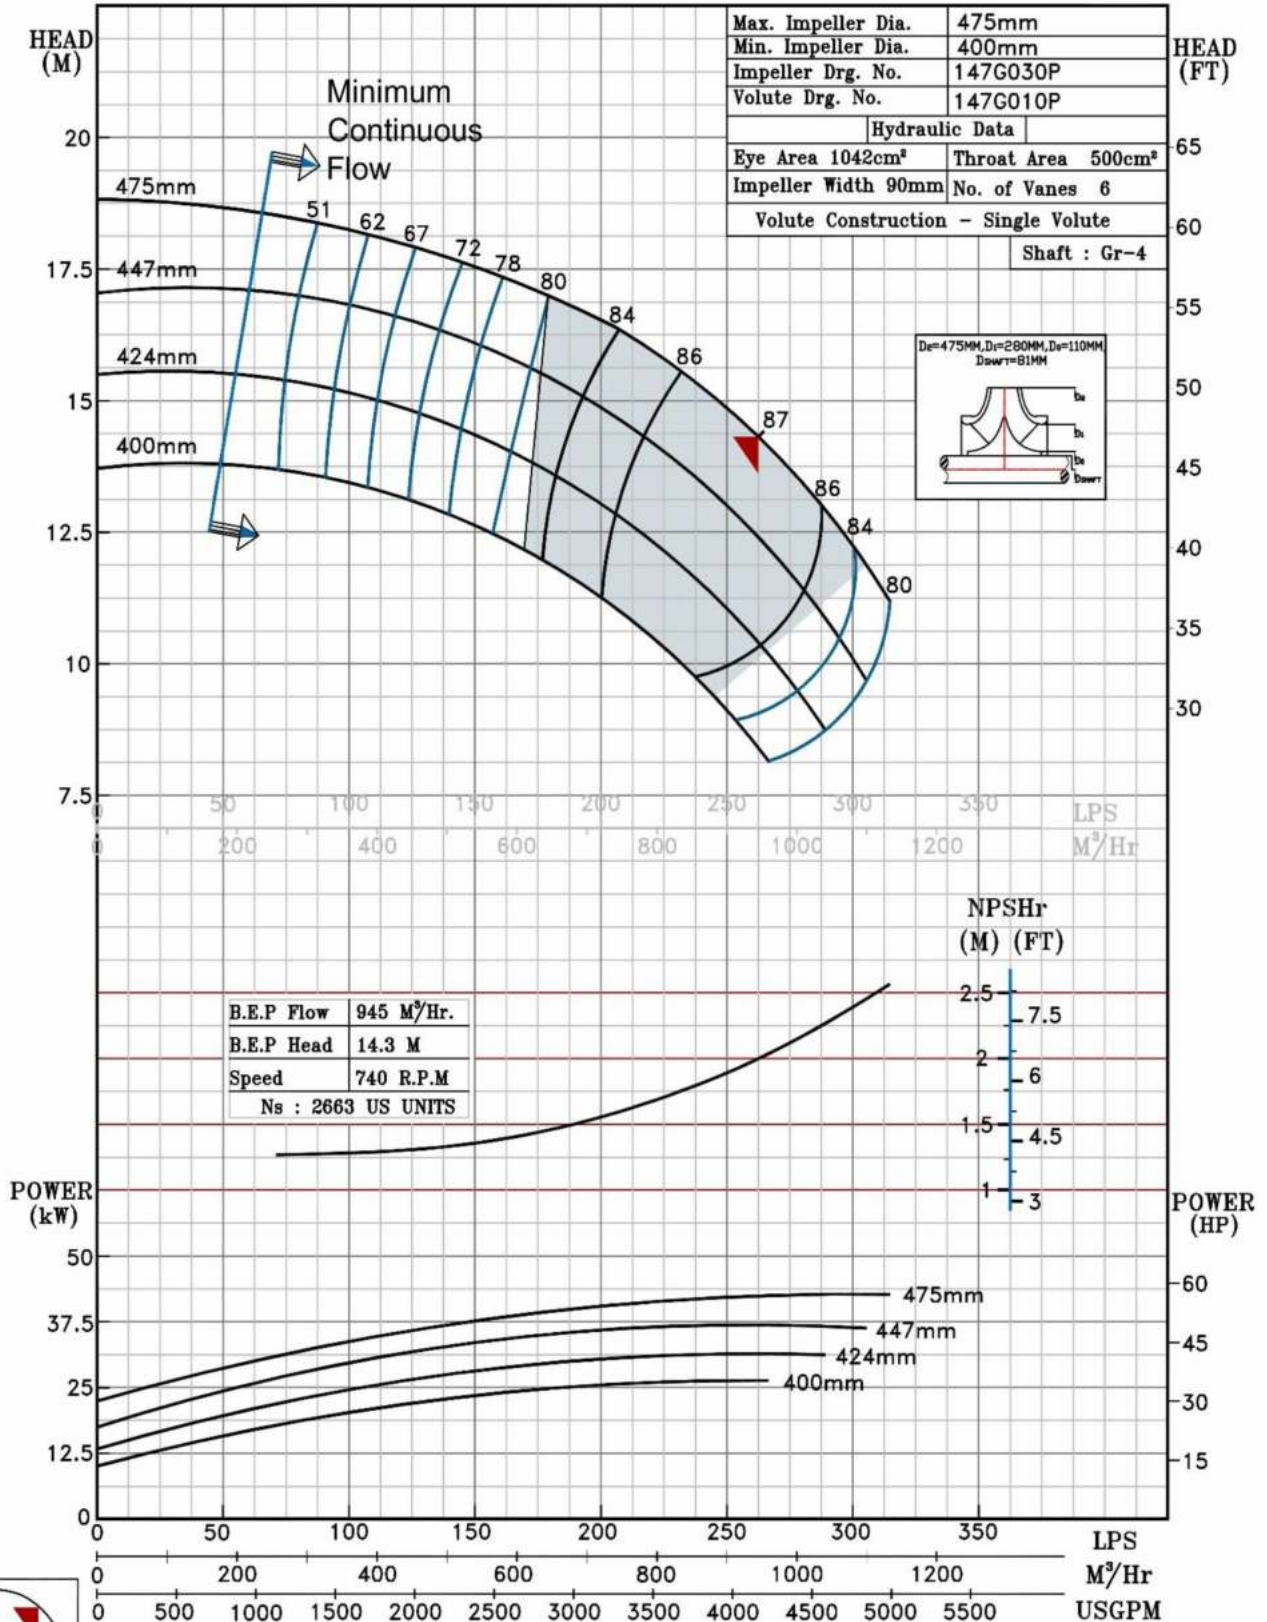

740 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 14HS21 @740 R.P.M

14HS21/X/104858

FISHER PUMP

HS RANGE

MODEL 14HS21

WORKING PRESS. 10 bar

SIZE 400x350-550


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 740 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

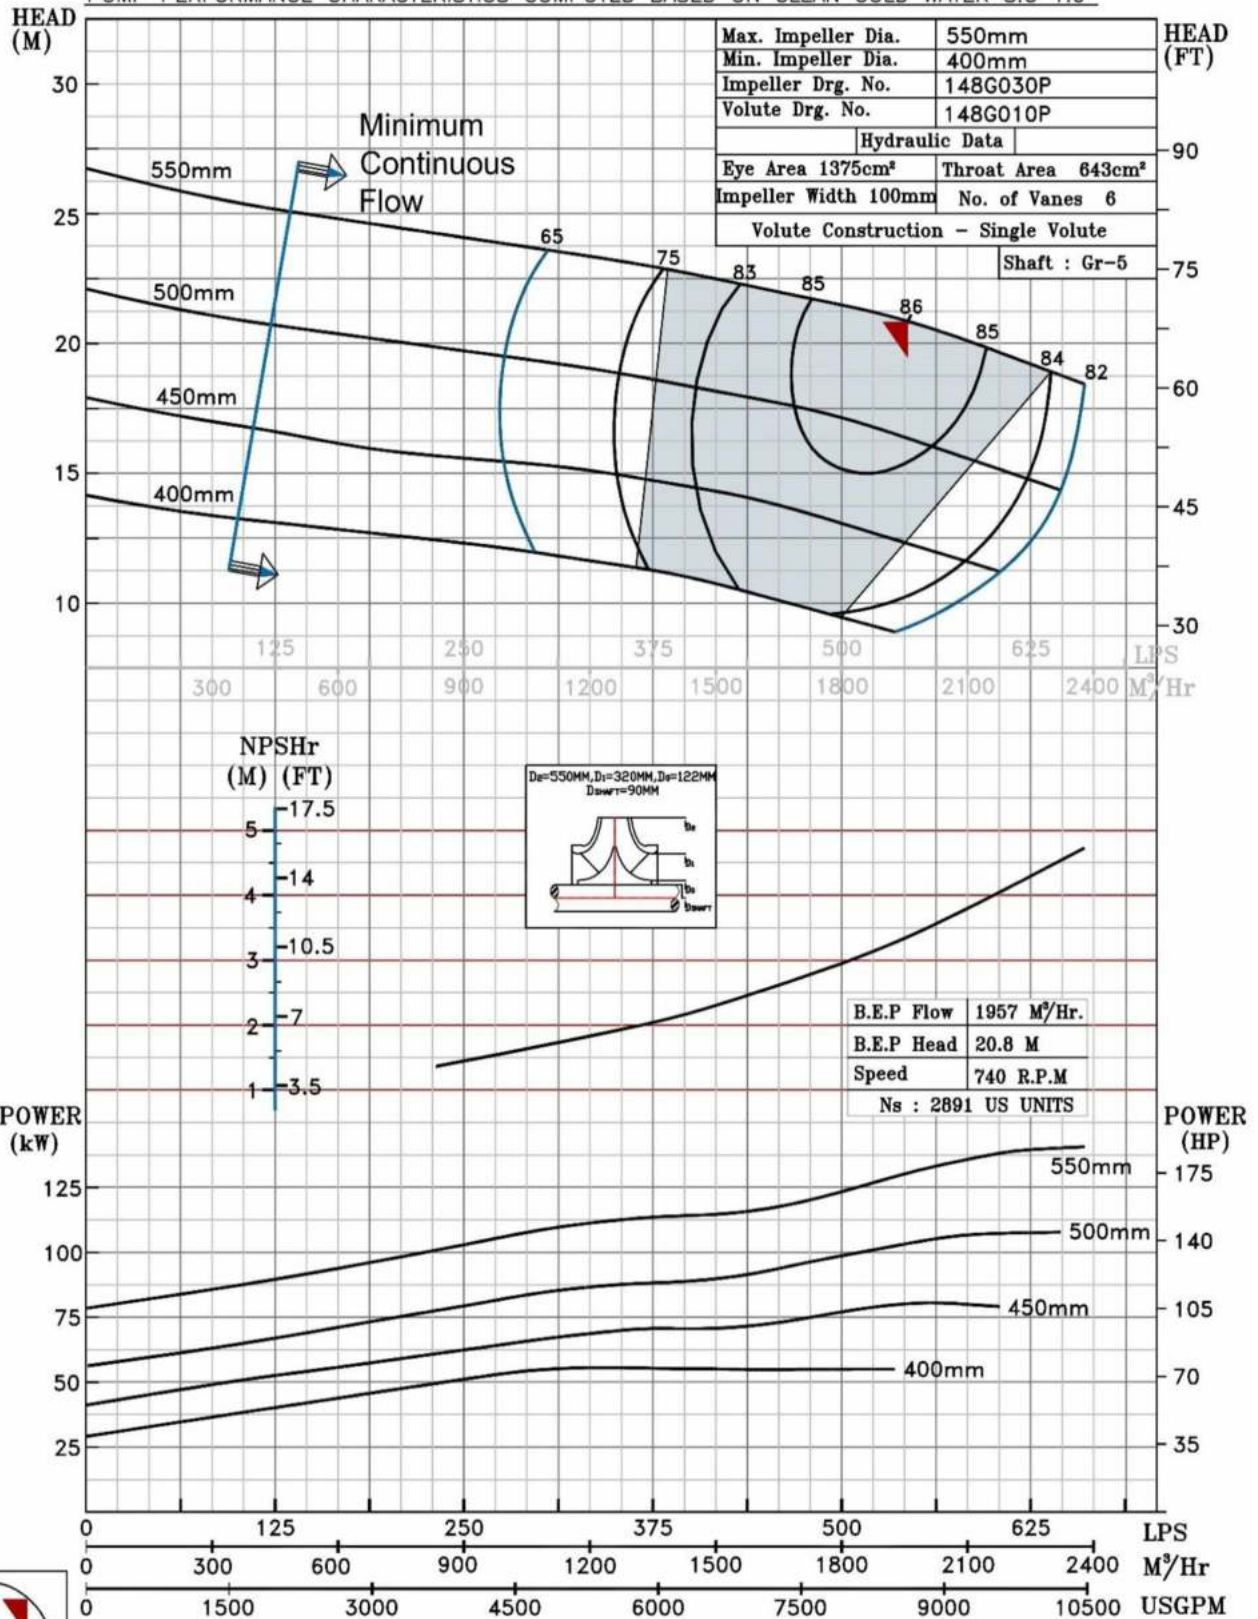

740 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 14HS24 @740 R.P.M

14HS24/X/104958

FISHER PUMP

HS RANGE

MODEL 14HS24

WORKING PRESS 10 bar

SIZE 400x350-610


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 740 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G. 1.0

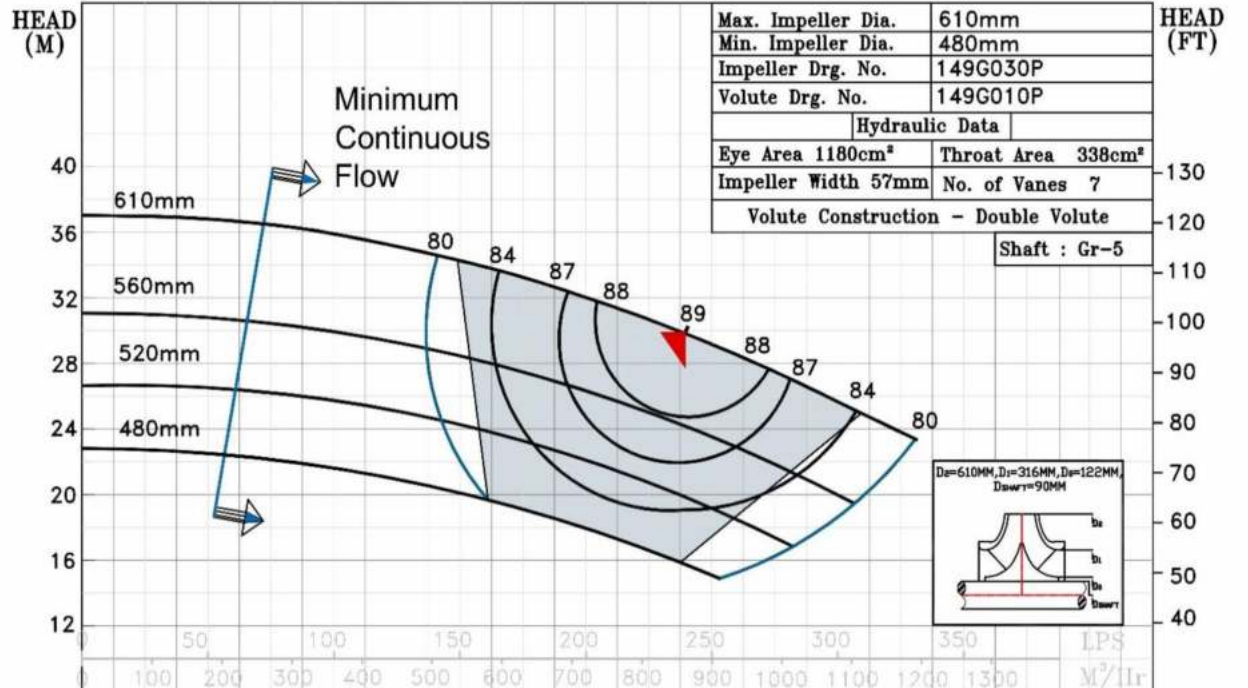


B.E.P Flow 862.5 M³/Hr.
B.E.P Head 29.9 M
Speed 740 R.P.M
Ns : 1463 US UNITS

NPSHr
(M) (FT)

POWER
(kW)

POWER
(HP)

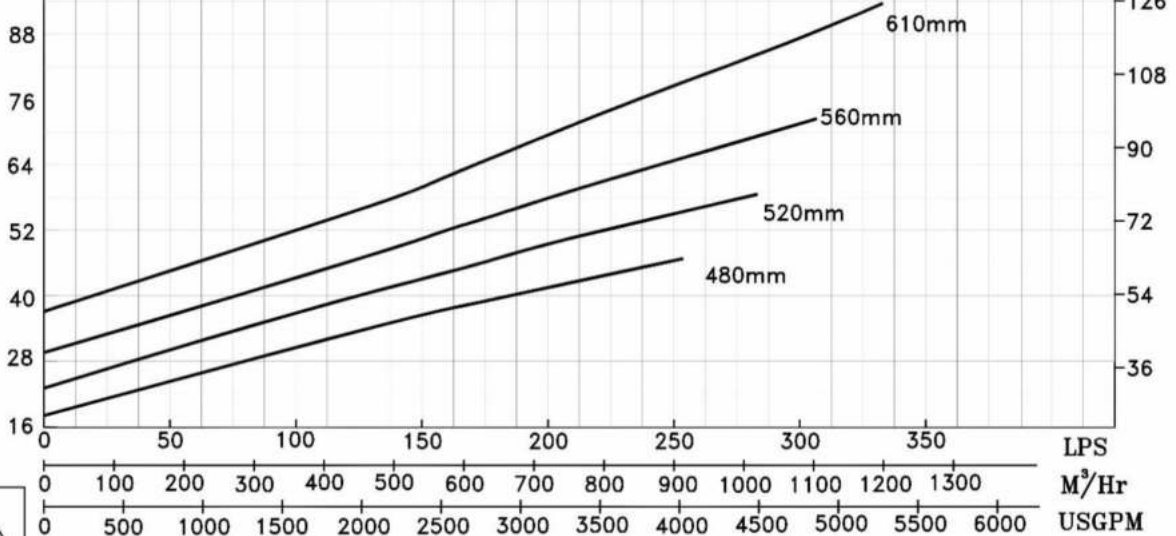

740 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 14HS26 @740 R.P.M

14HS26/X/105158

FISHER PUMP

HS RANGE

MODEL 14HS26

WORKING PRESS 10 bar

SIZE 400x350-642


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 740 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

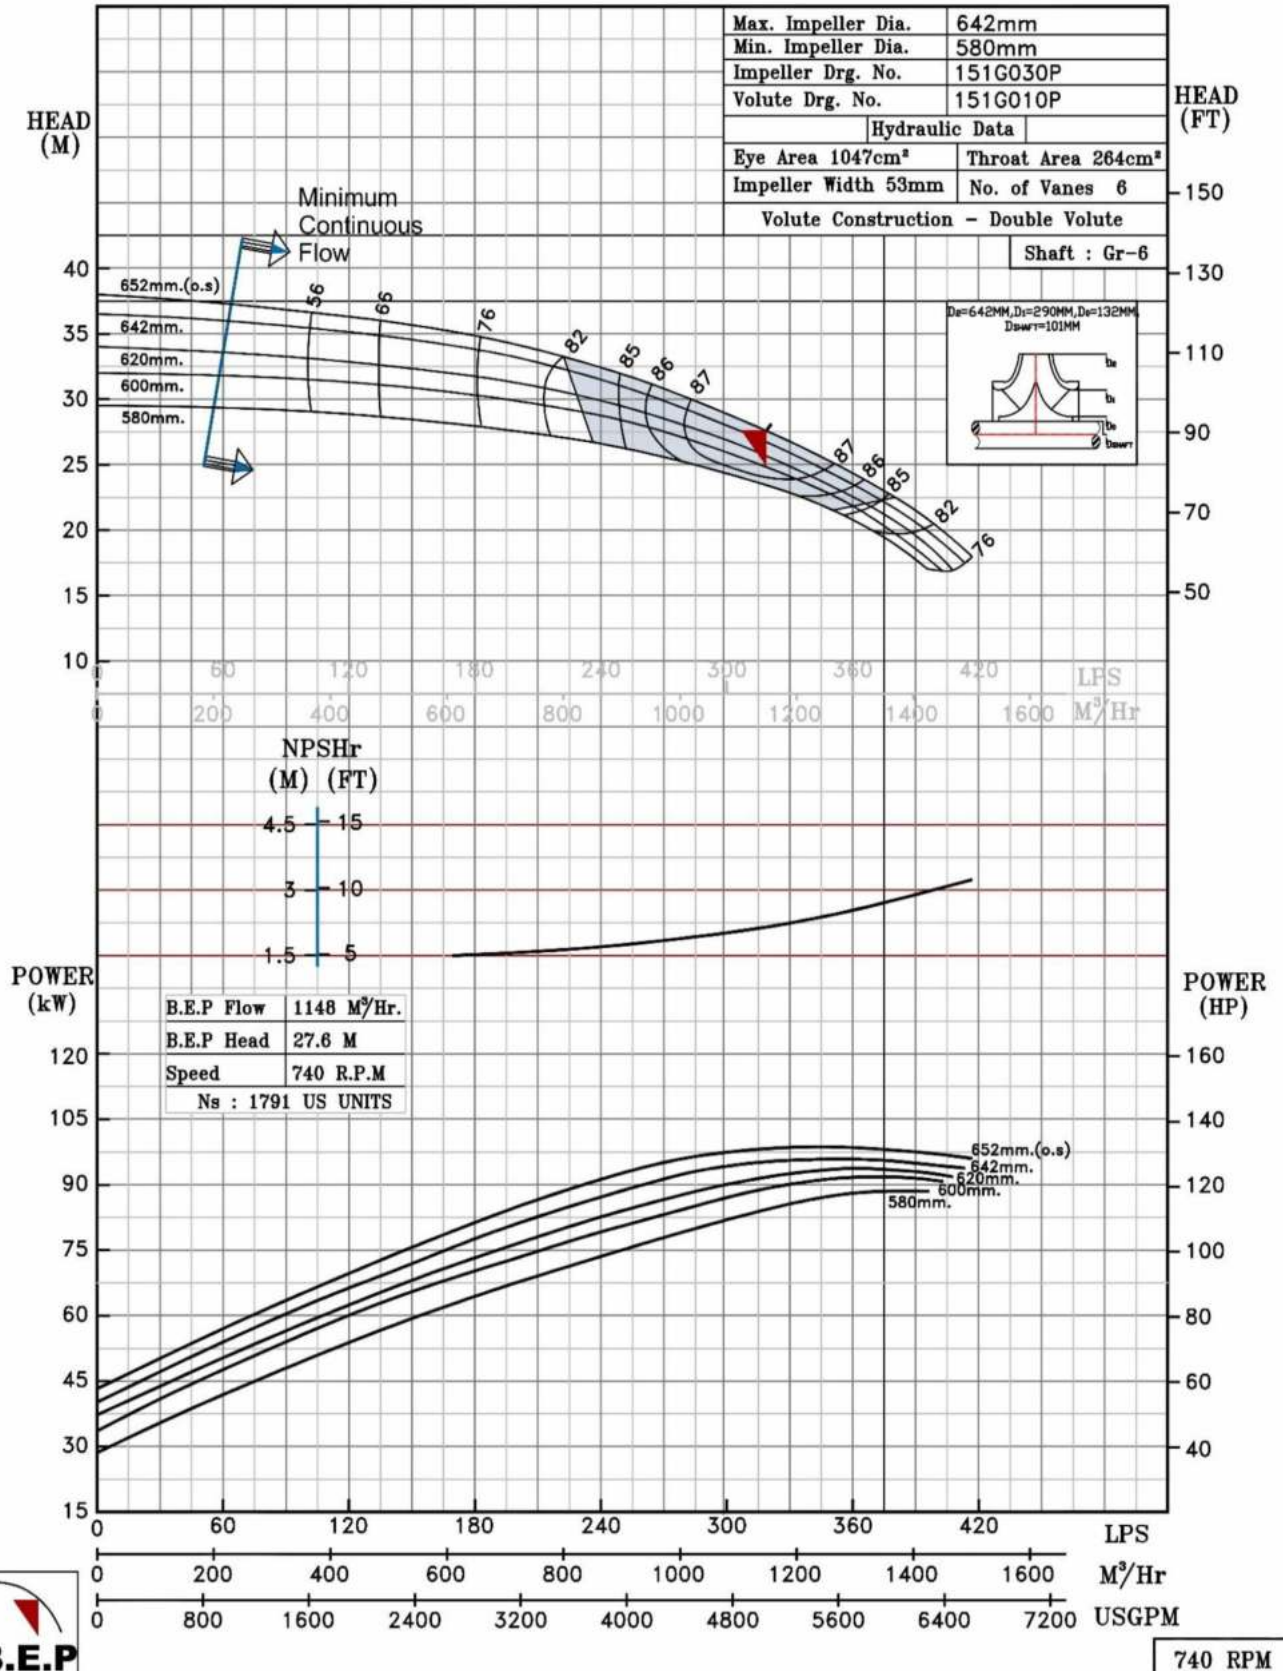

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 14HS28 @740 R.P.M

14HS28/X/105258

FISHER PUMP

HS RANGE

MODEL 14HS28

WORKING PRESS. 10 bar

SIZE 450x350-710


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 740 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G. 1.0

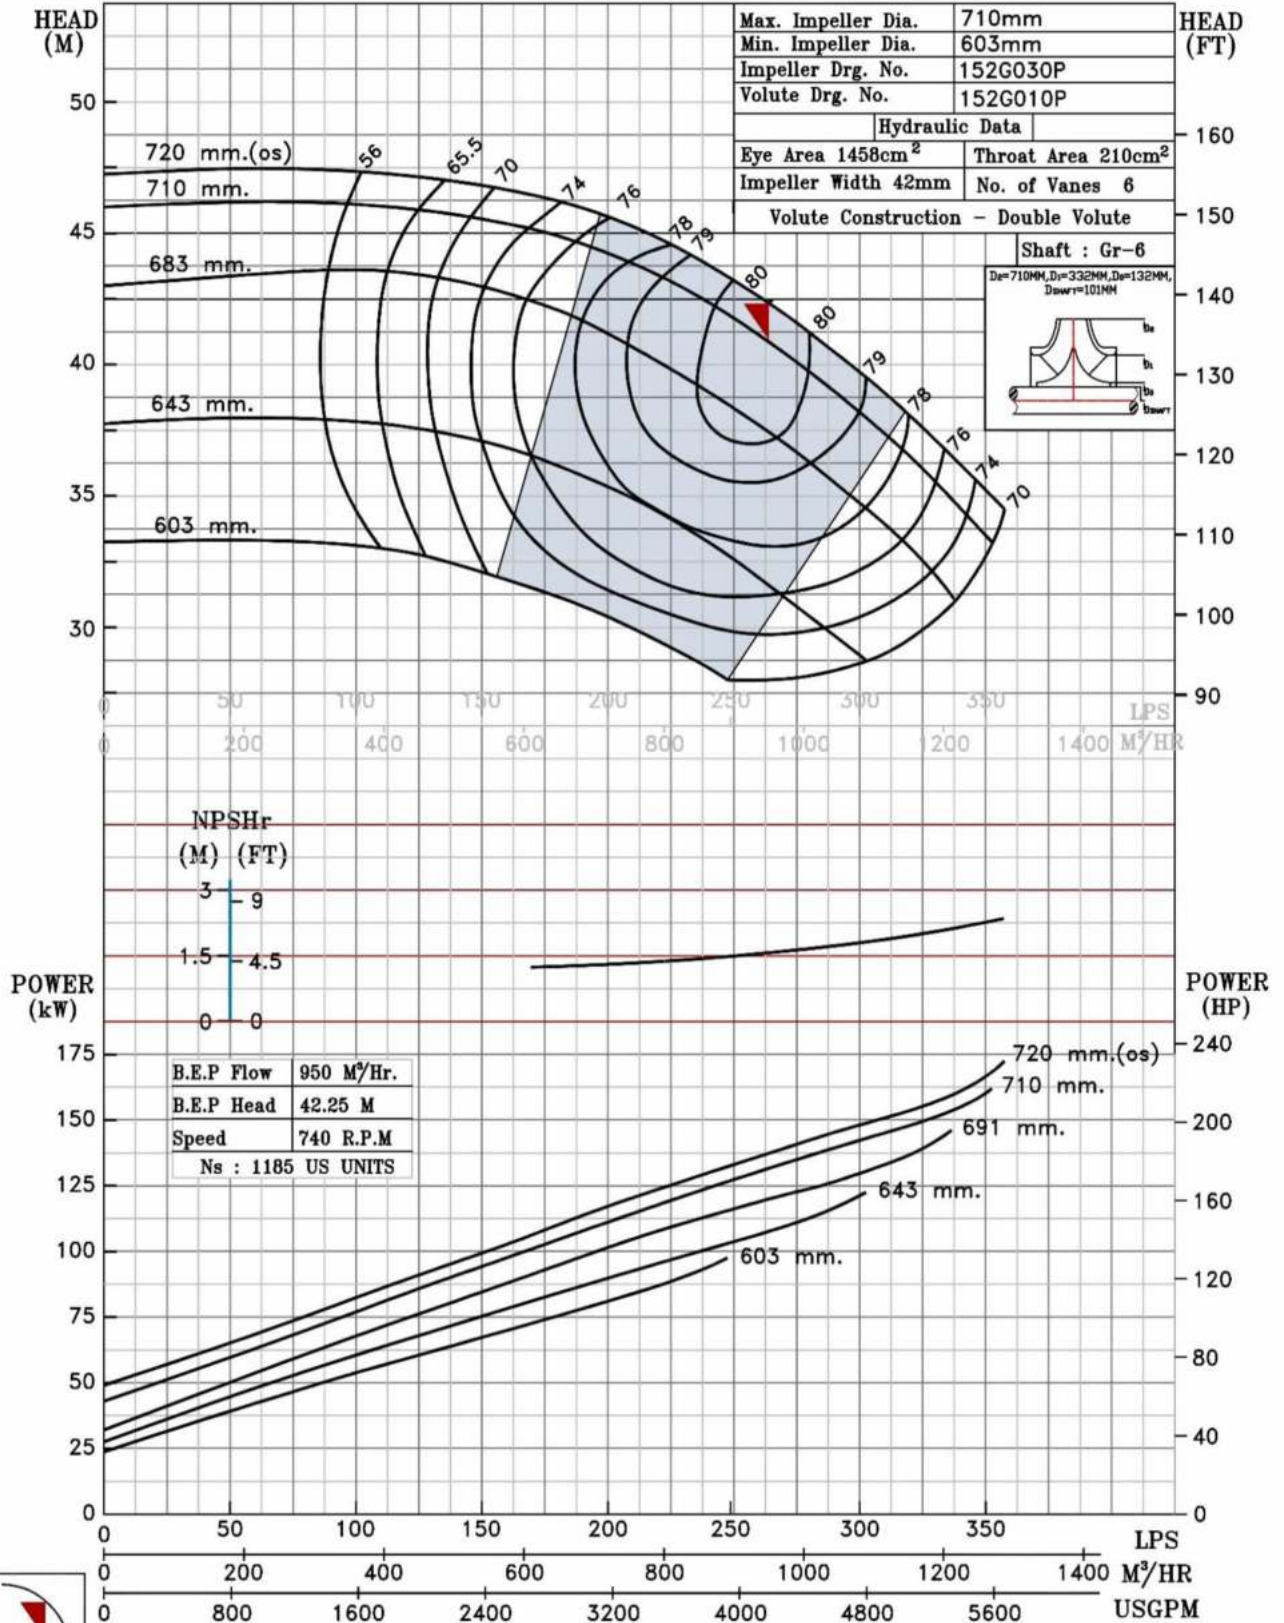

740 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 14HS30 @740 R.P.M

14HS30/X/105358

FISHER PUMP

HS RANGE

MODEL 14HS30

WORKING PRESS. 10 bar

SIZE 450x350-770


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 740 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G. 1.0

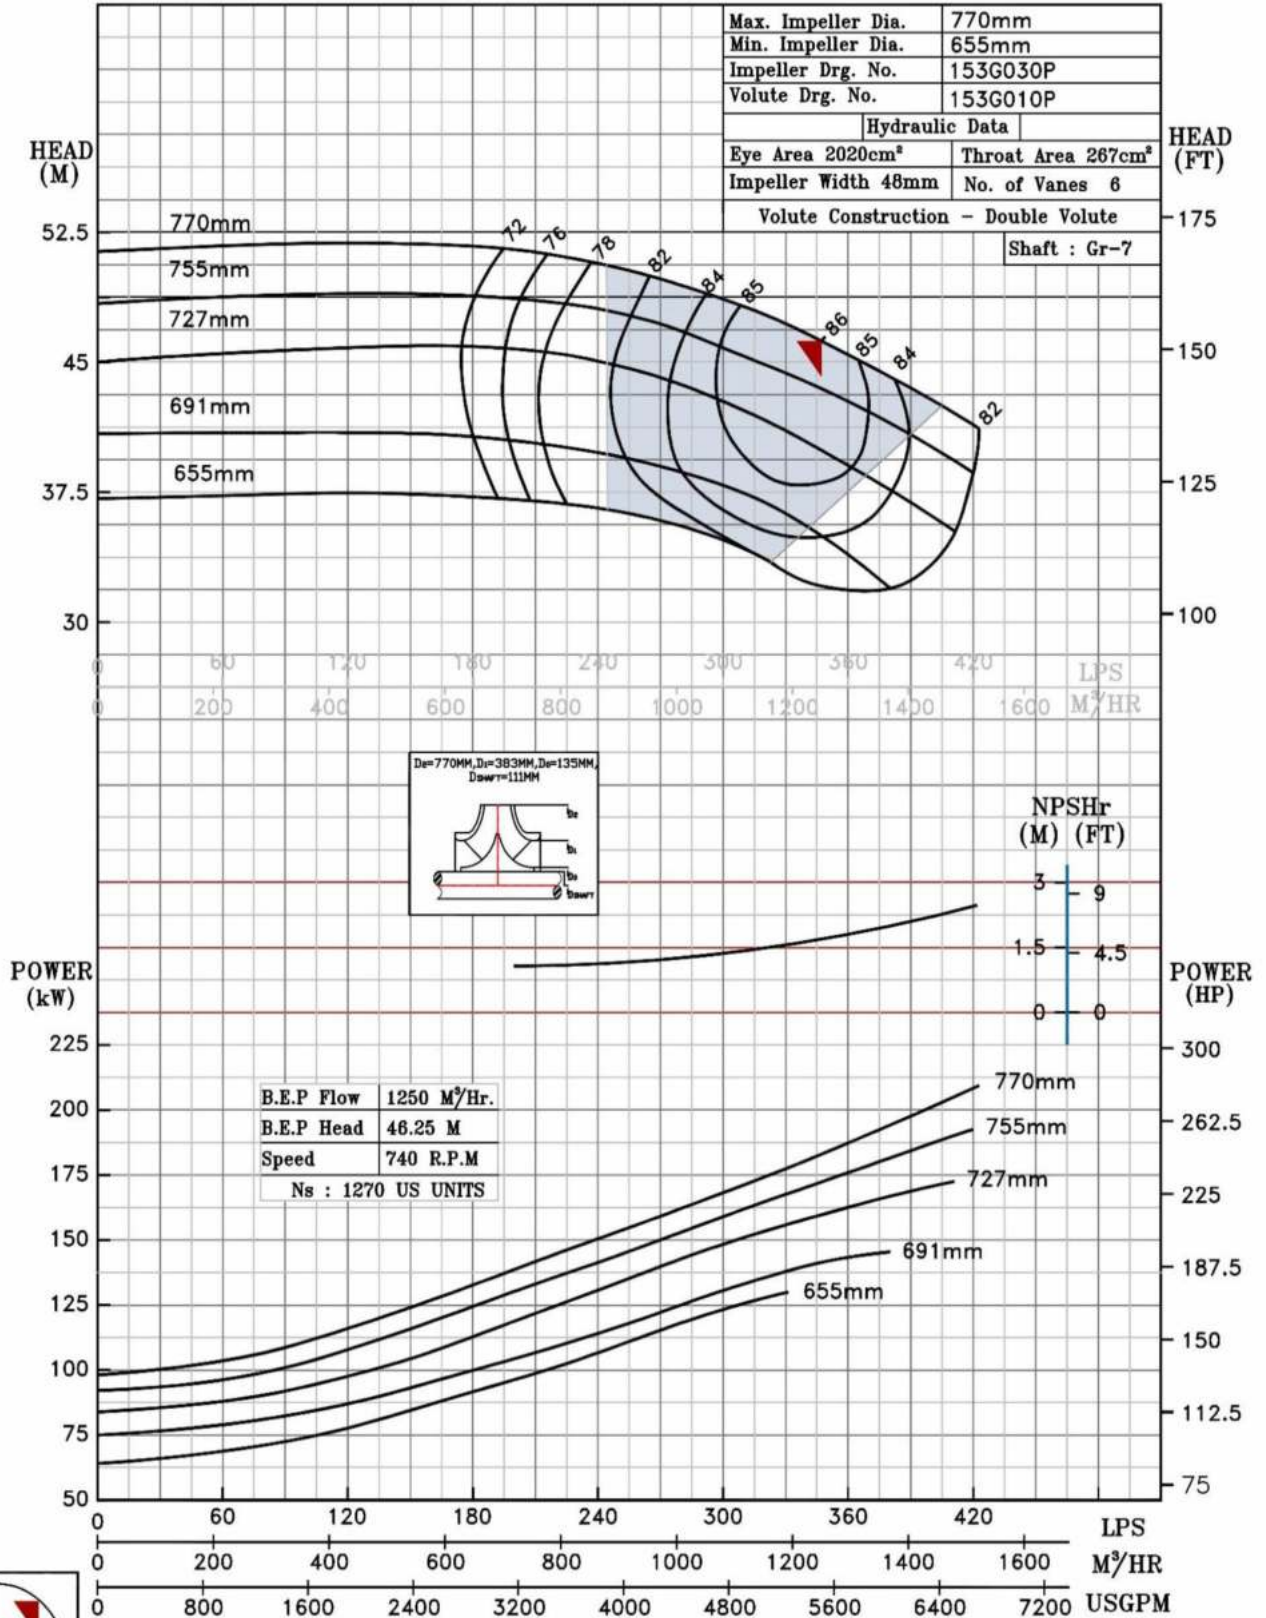

740 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 16HS21 @740 R.P.M

16HS21/X/105458


FISHER PUMP

HS RANGE

MODEL 16HS21	WORKING PRESS. 10 bar
SIZE 500x400-540	TEST PRESS. 15 bar
TYPE-AXIALLY SPLIT CASE SINGLE STAGE	
SPEED 740 rpm	

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

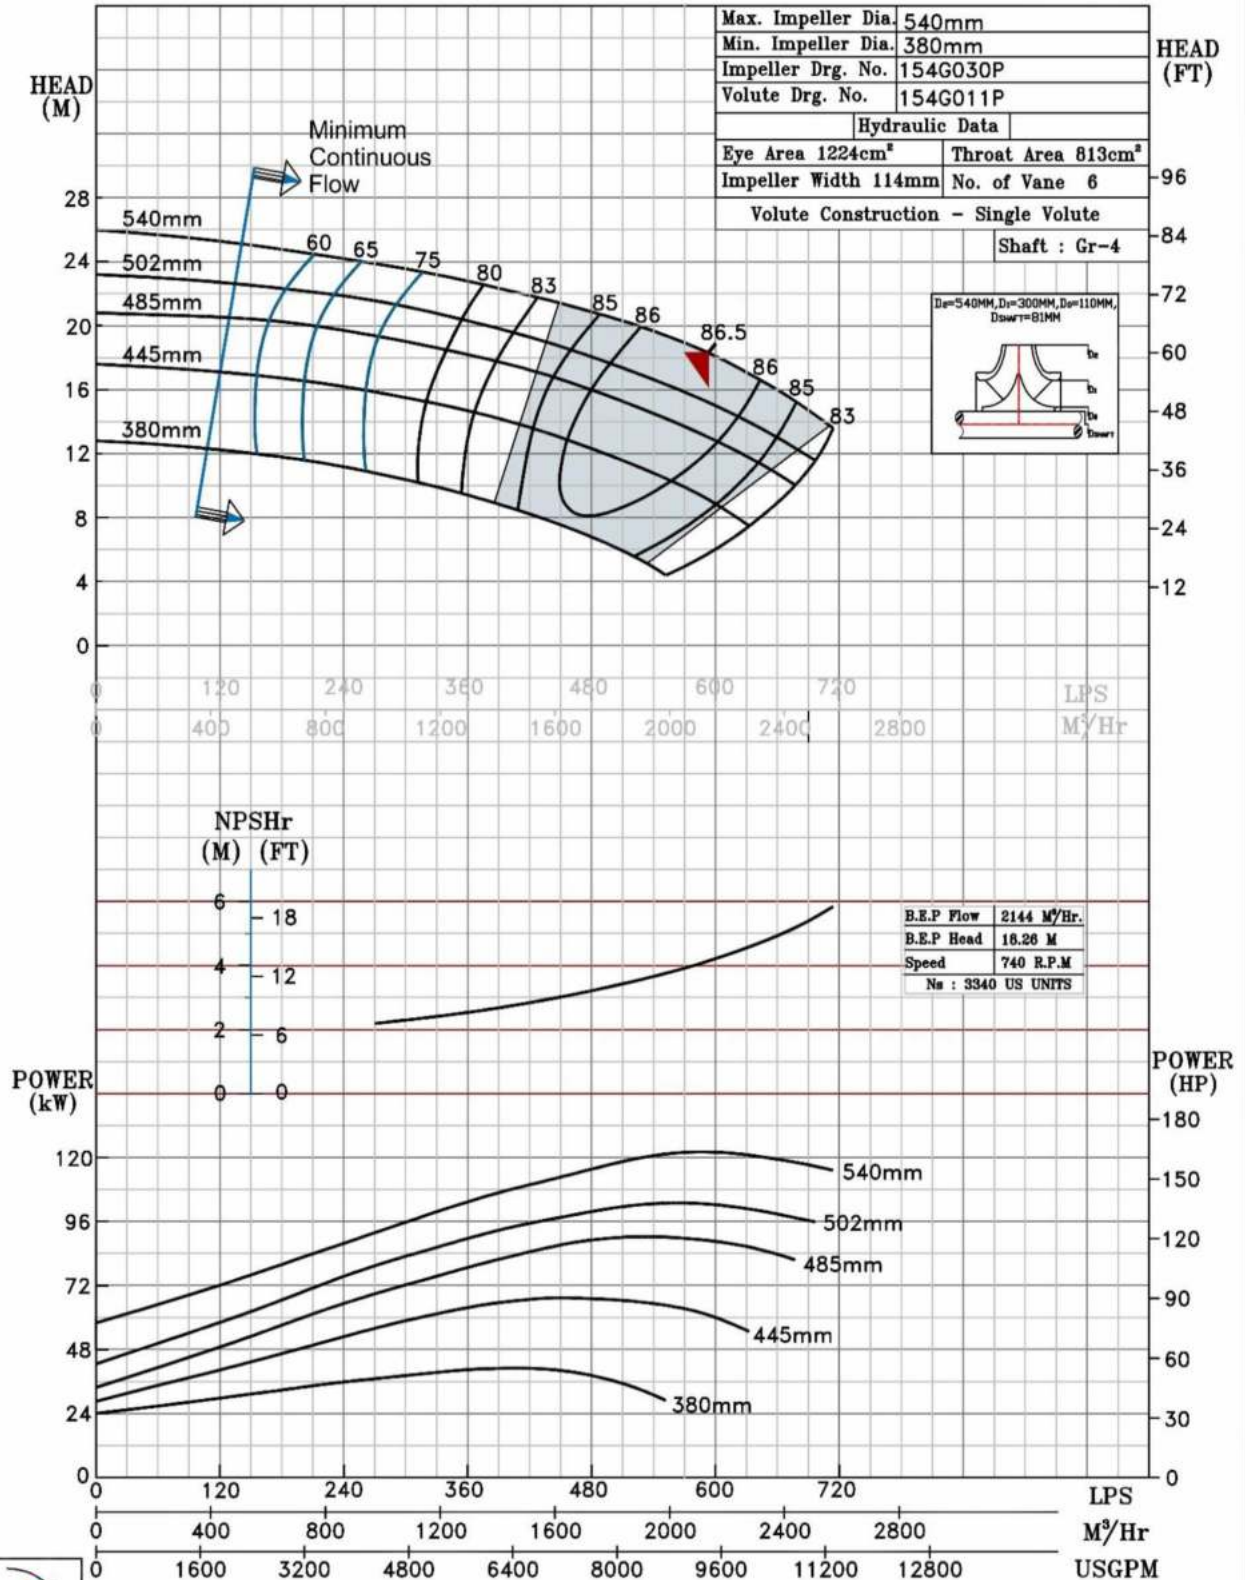

740 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 16HS21H @740 R.P.M

16HS21H/X/105558

FISHER PUMP

HS RANGE

MODEL 16HS21H

WORKING PRESS 10 bar

SIZE 500x400-540


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 740 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

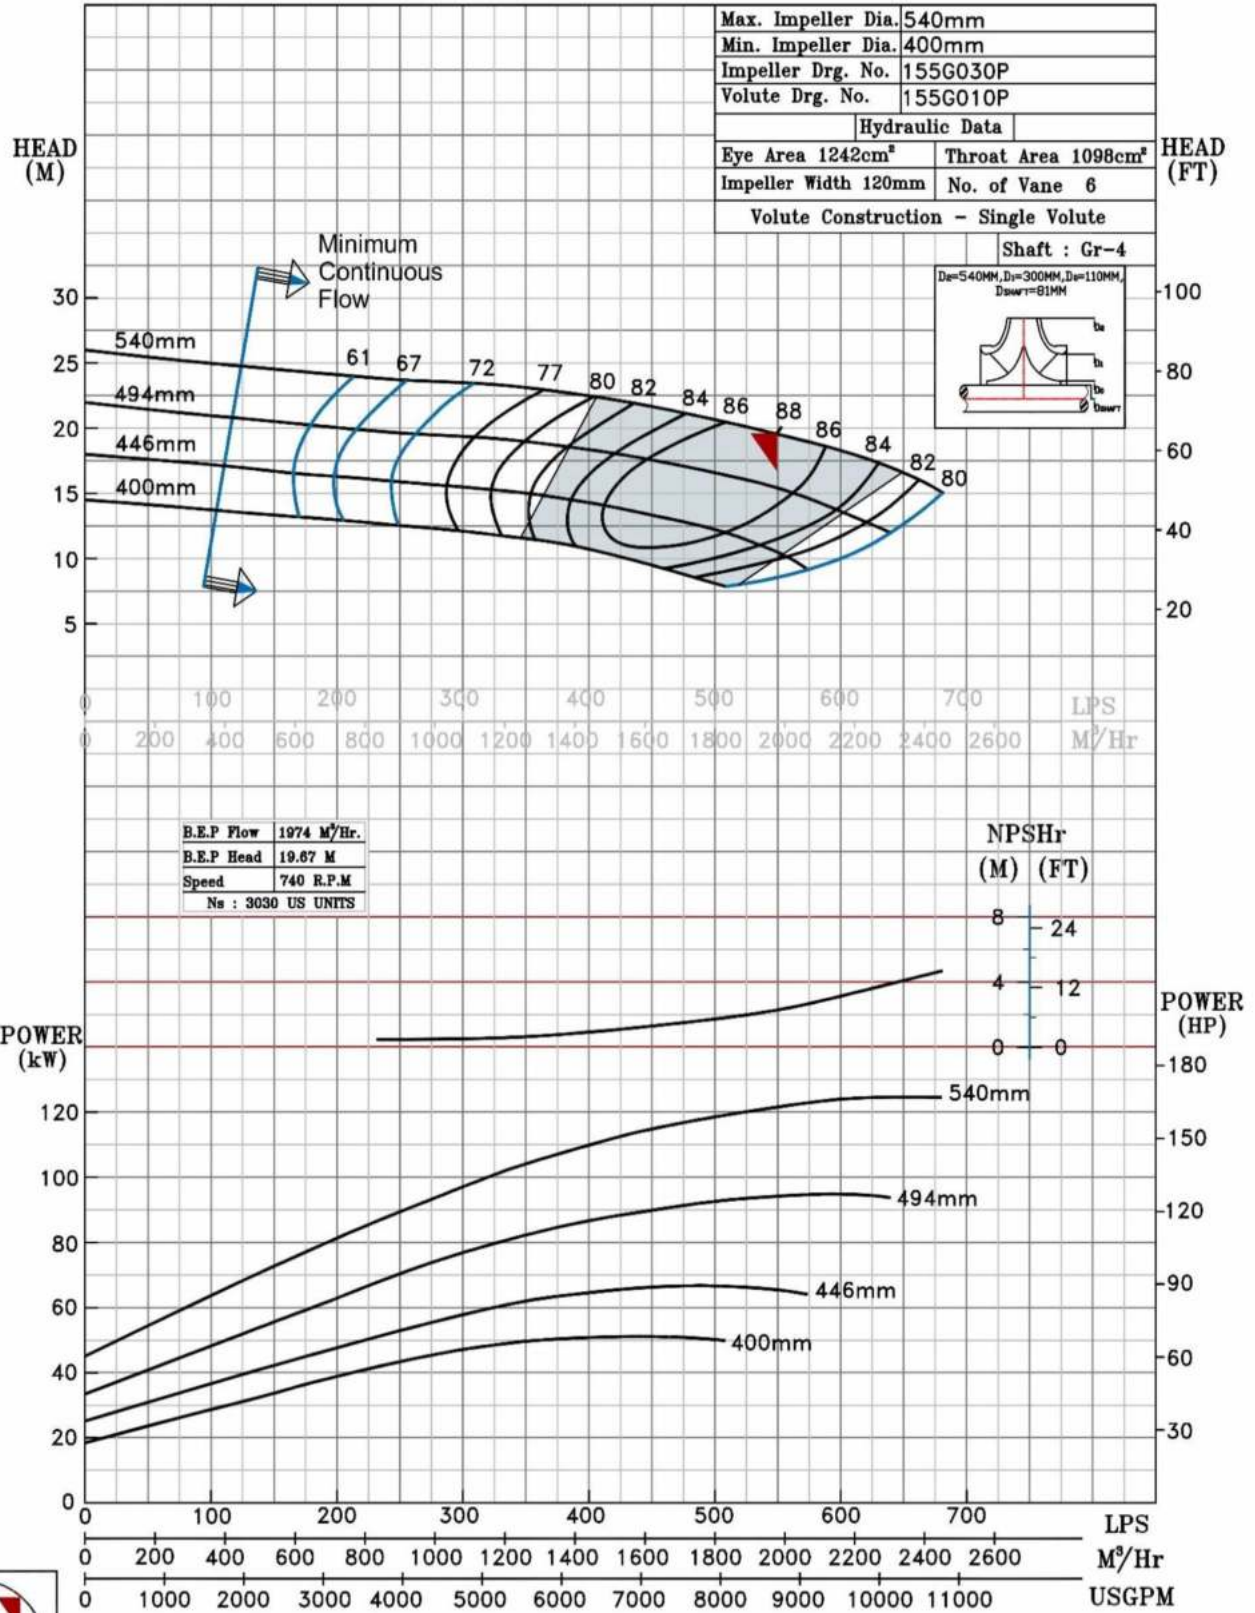

740 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 16HS21L @740 R.P.M

16HS21L/X/105658

FISHER PUMP

HS RANGE

MODEL 16HS21L

WORKING PRESS 10 bar

SIZE 500x400-540


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 740 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

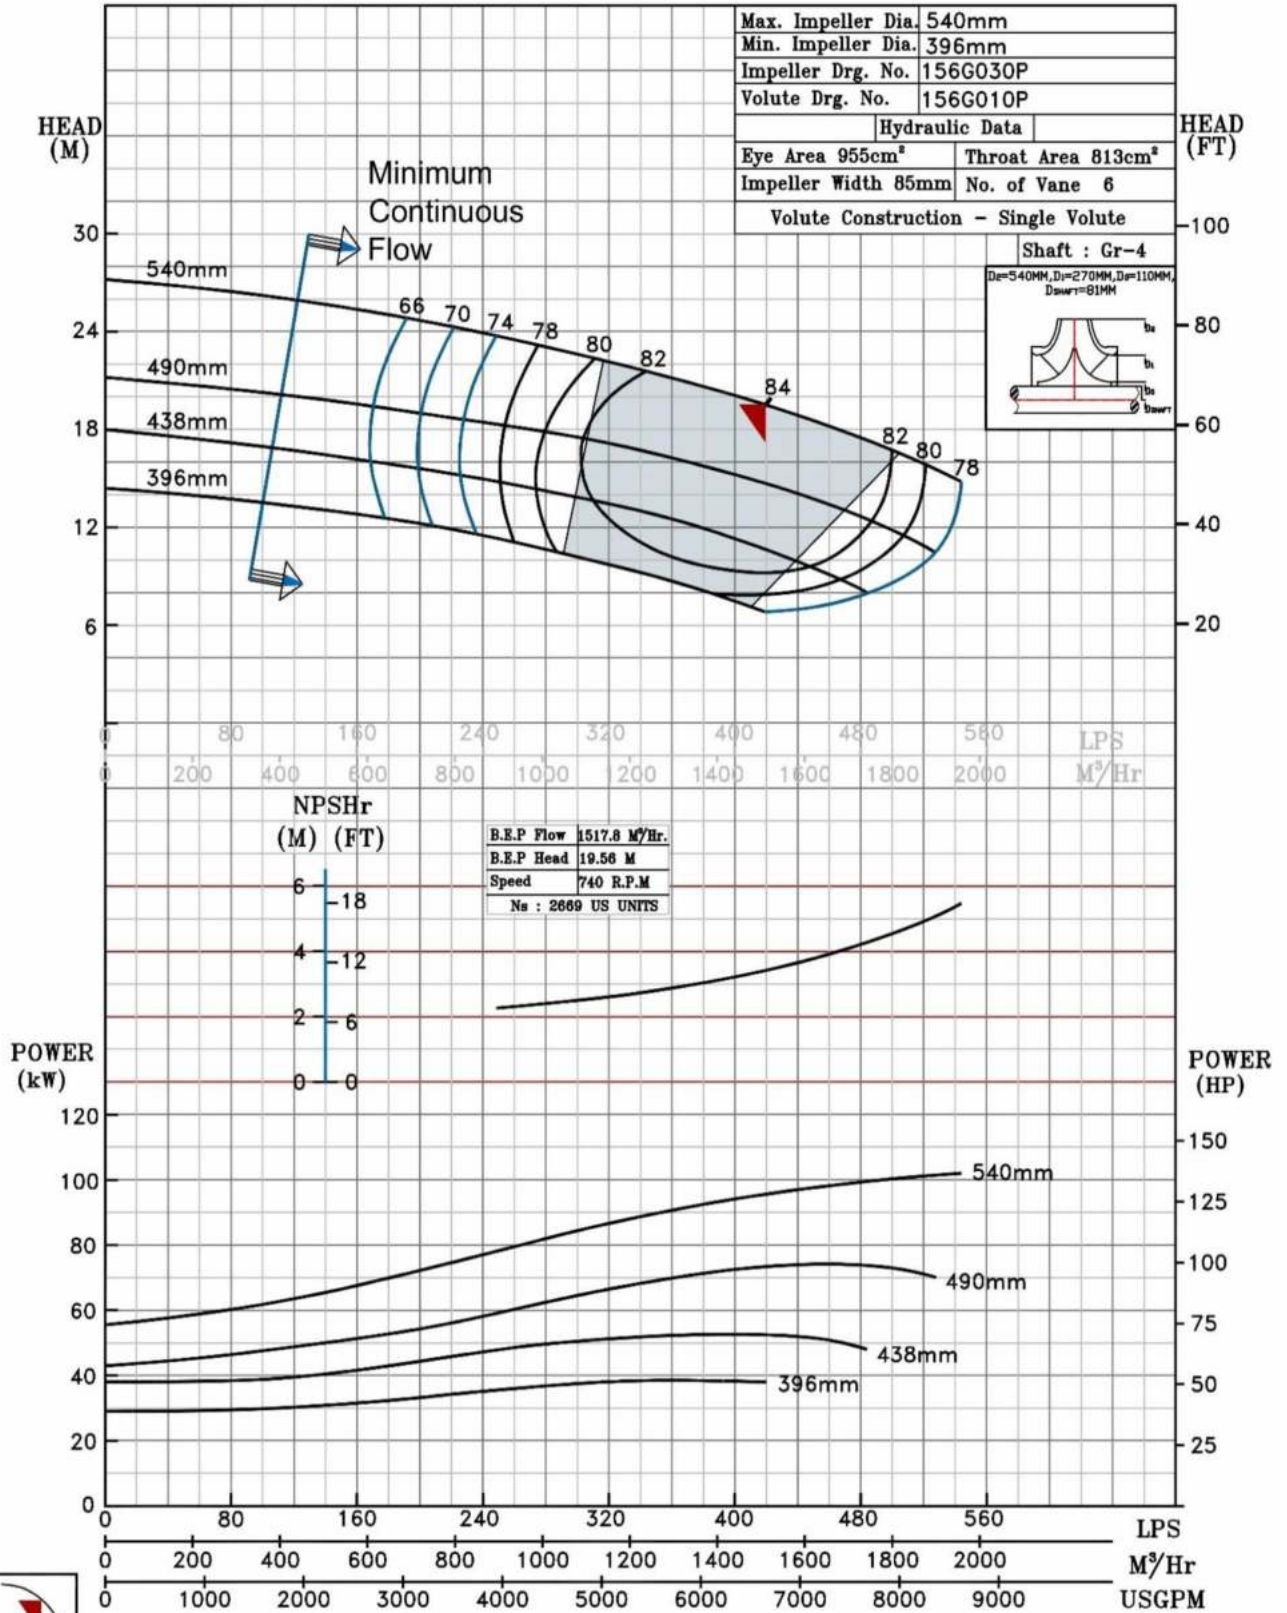

740 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 16HS26 @740 R.P.M

16HS26/Y/105758

FISHER PUMP

HS RANGE

MODEL 16HS26

WORKING PRESS 10 bar

SIZE 500x400-662


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 740 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

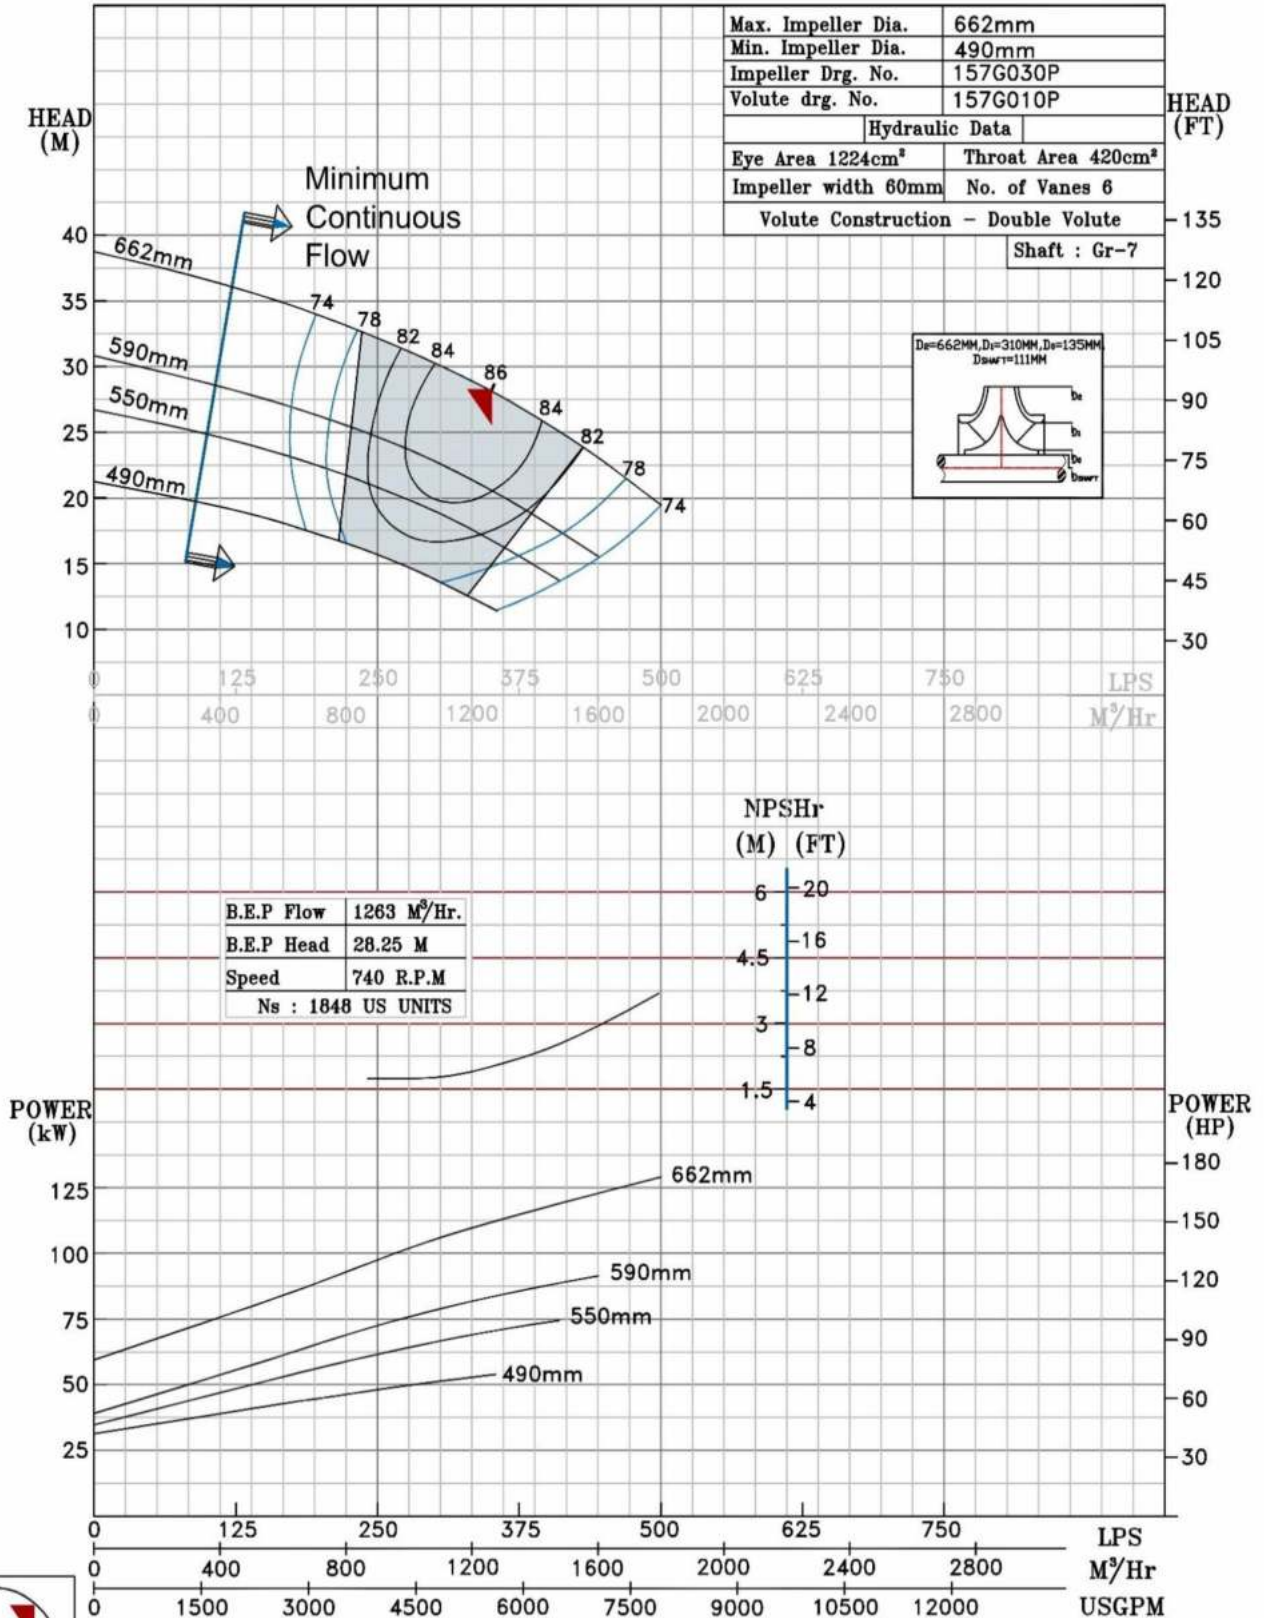

740 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 16HS28 @740 R.P.M

16HS28/X/105858

FISHER PUMP

HS RANGE

MODEL 16HS28

WORKING PRESS. 10 bar

SIZE 450x400-700


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 740 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

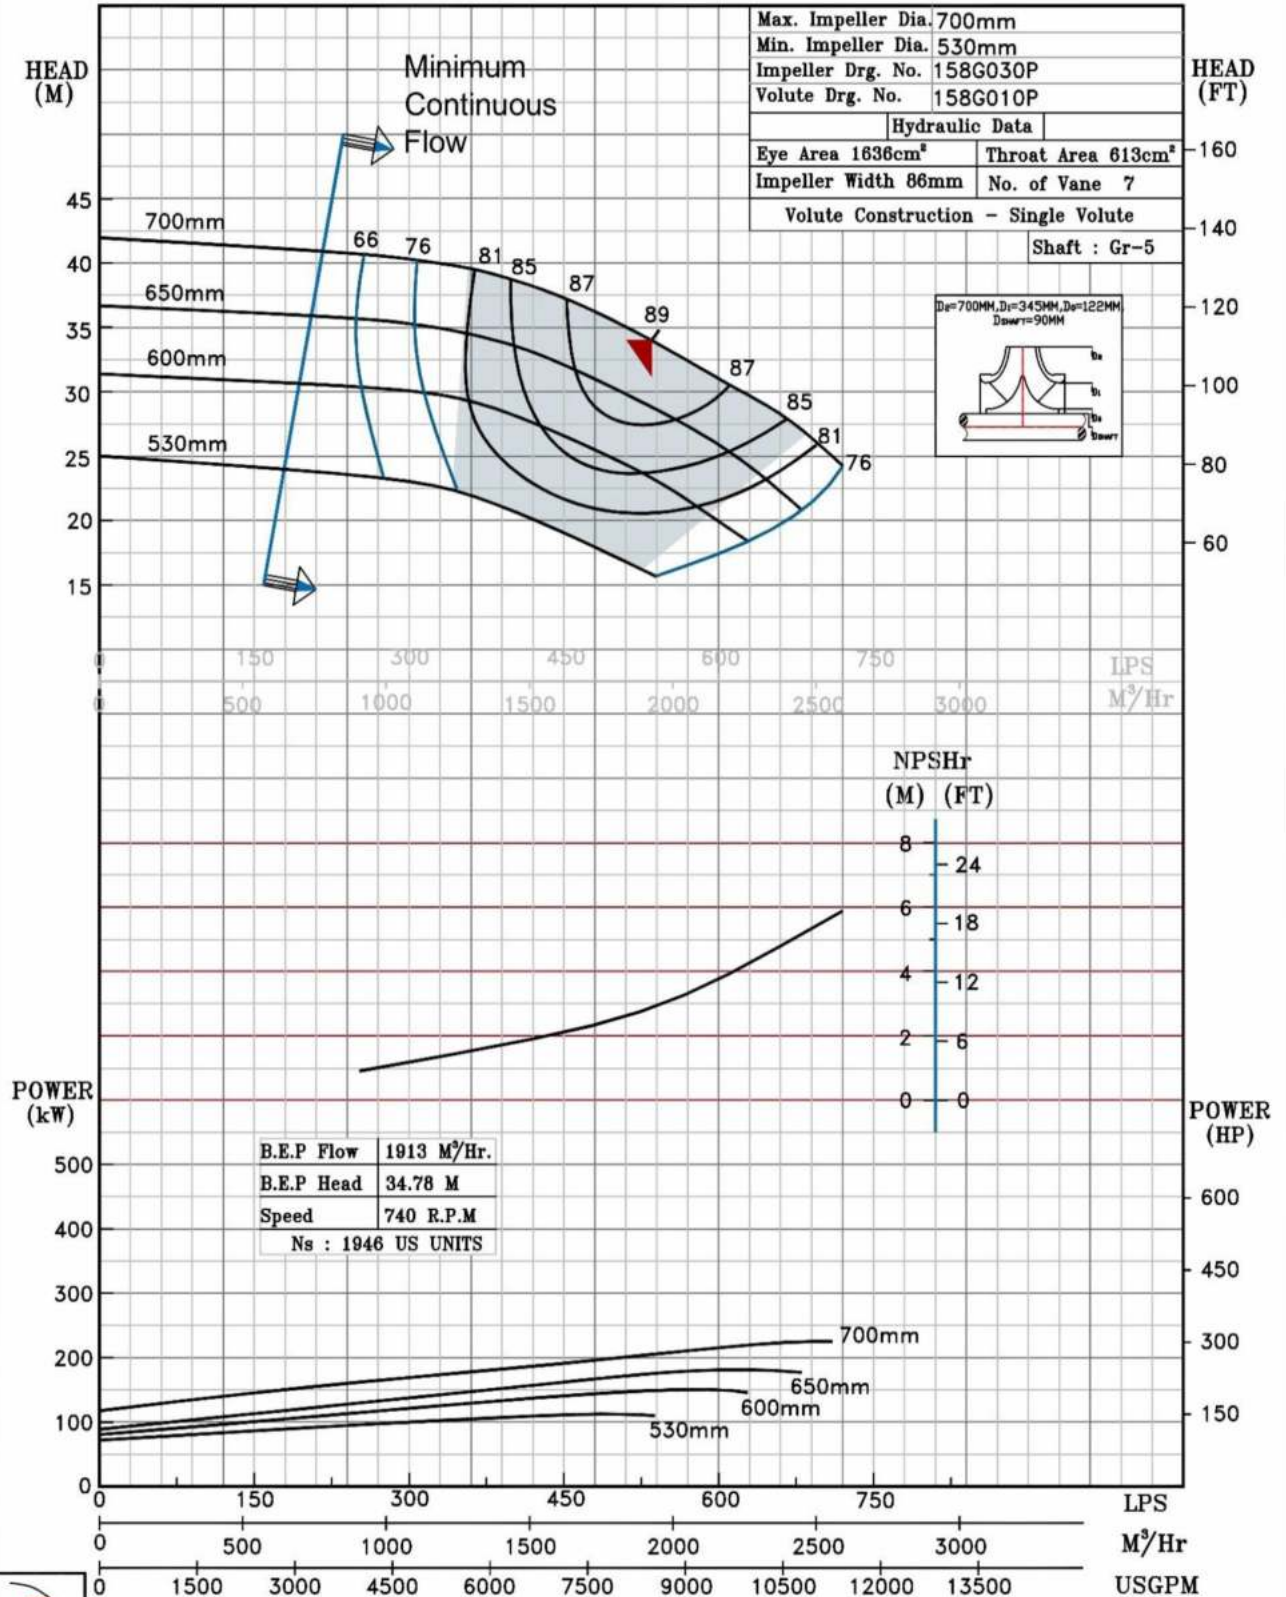

740 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 16HS32 @740 R.P.M

16HS32/X/105958

FISHER PUMP

HS RANGE

MODEL 16HS32

WORKING PRESS 10 bar

SIZE 500x400-813


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 740 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

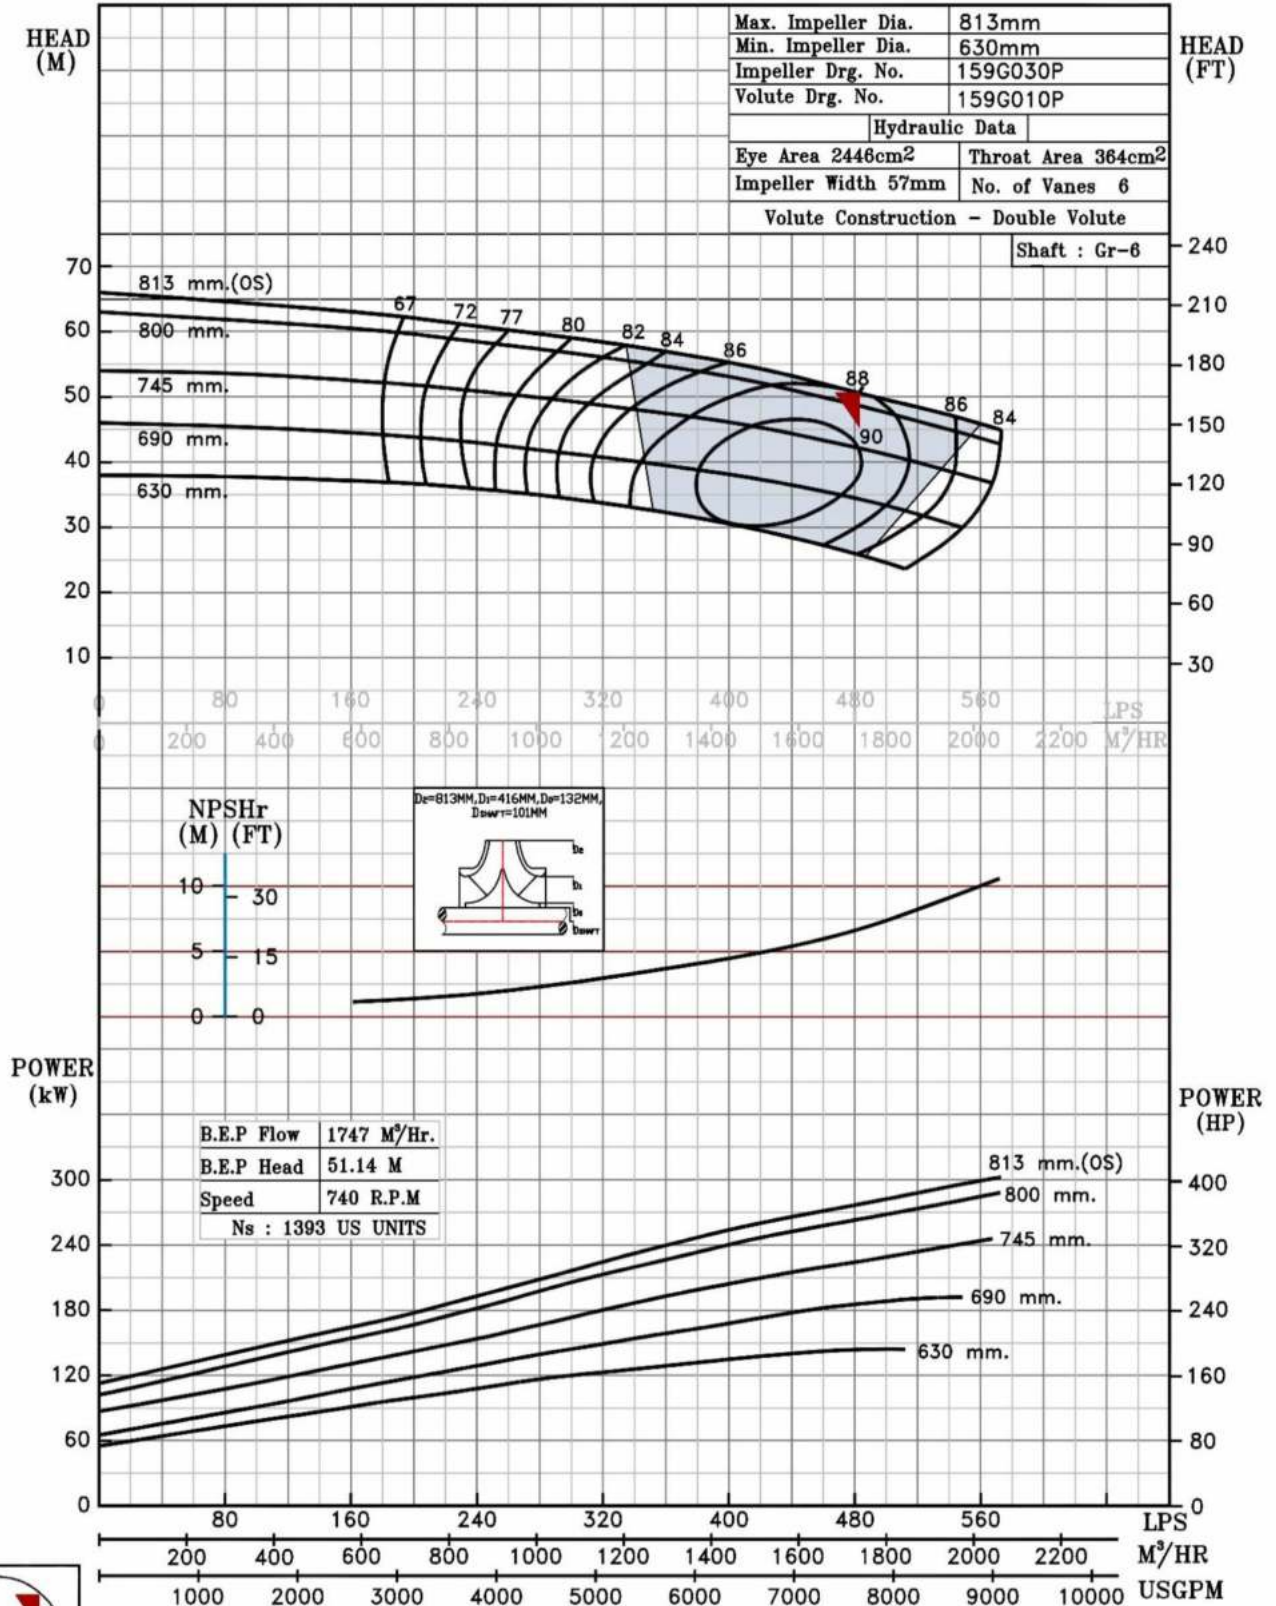

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 18HS21 @740 R.P.M

18HS21/X/106058

FISHER PUMP

HS RANGE

MODEL 18HS21

WORKING PRESS. 10 bar

SIZE 500x450-530


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 740 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G. 1.0

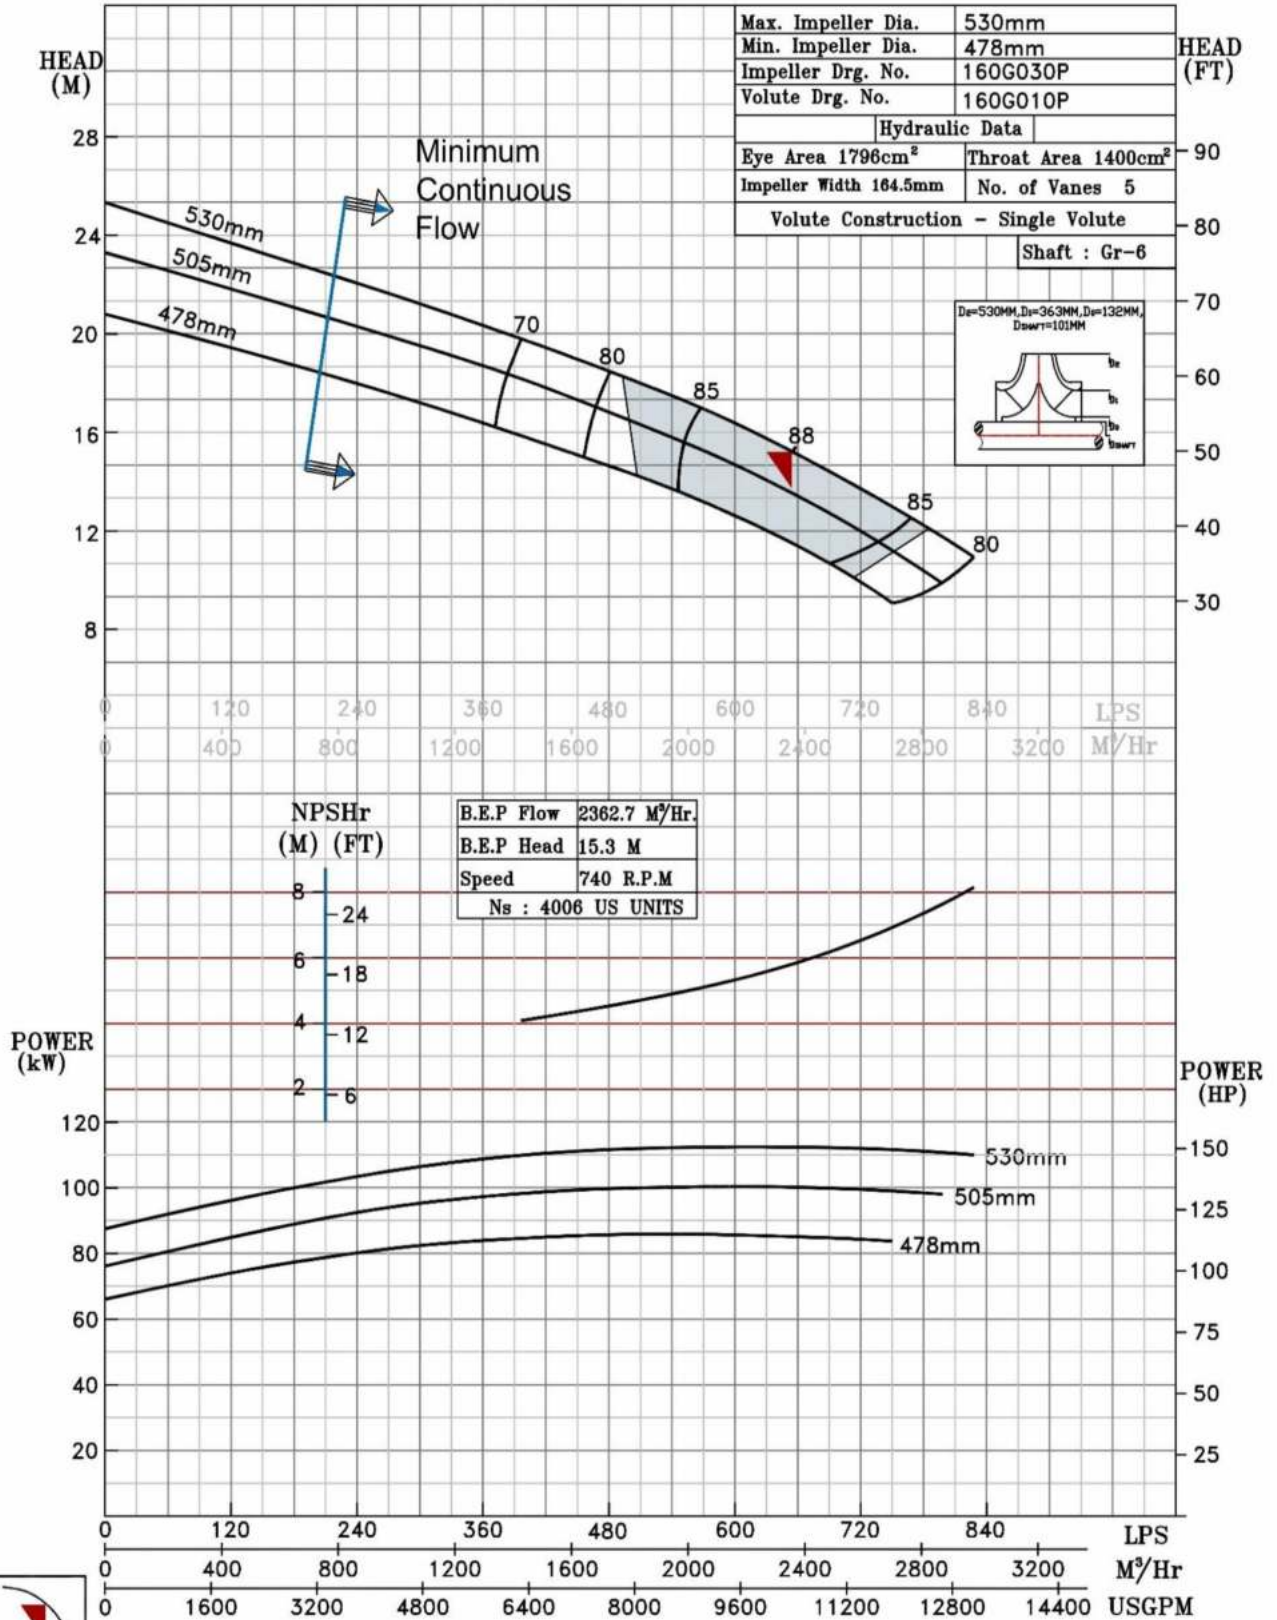

740 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 18HS25 @740 R.P.M

18HS25/X/106158

FISHER PUMP

HS RANGE

MODEL 18HS25

WORKING PRESS 10 bar

SIZE 500x450-632


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 740 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

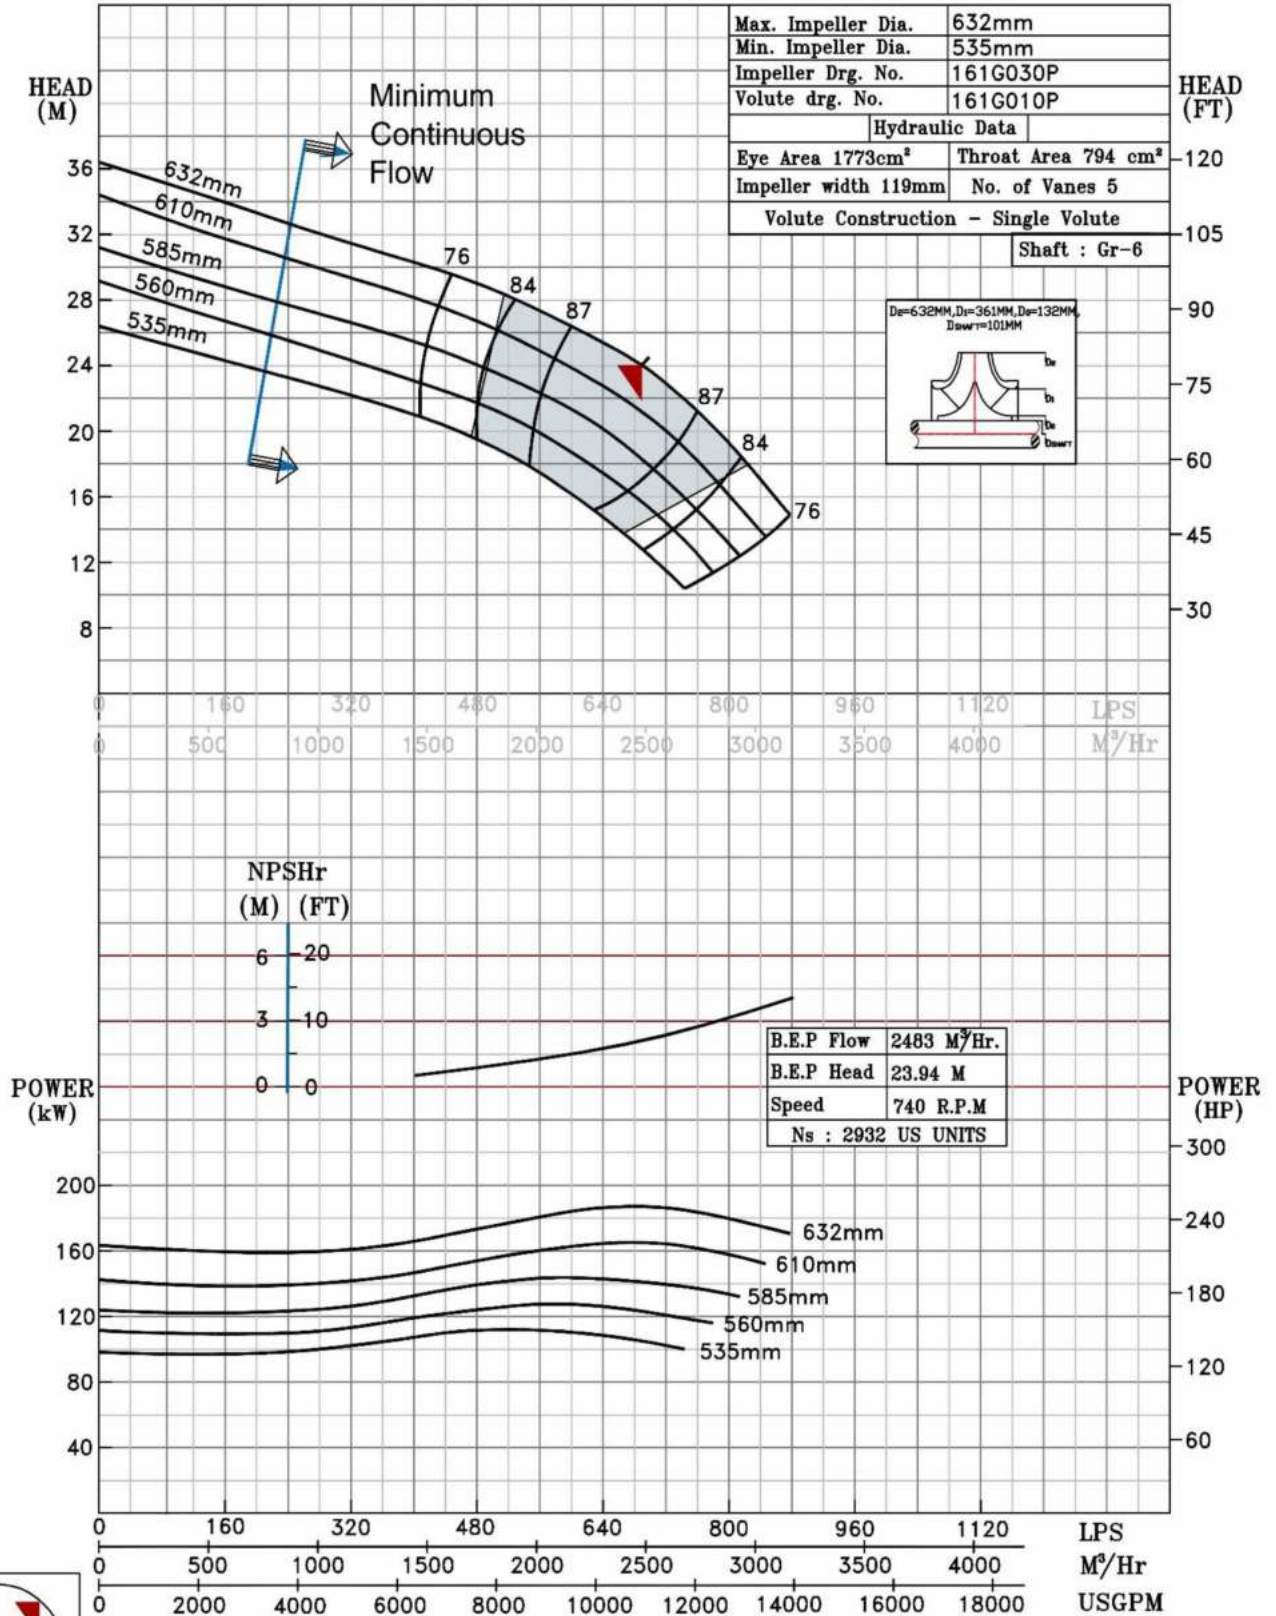

740 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 18HS30 @740 R.P.M

18HS30/X/106258

FISHER PUMP

HS RANGE

MODEL 18HS30

WORKING PRESS 10 bar

SIZE 500x450-750


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 740 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

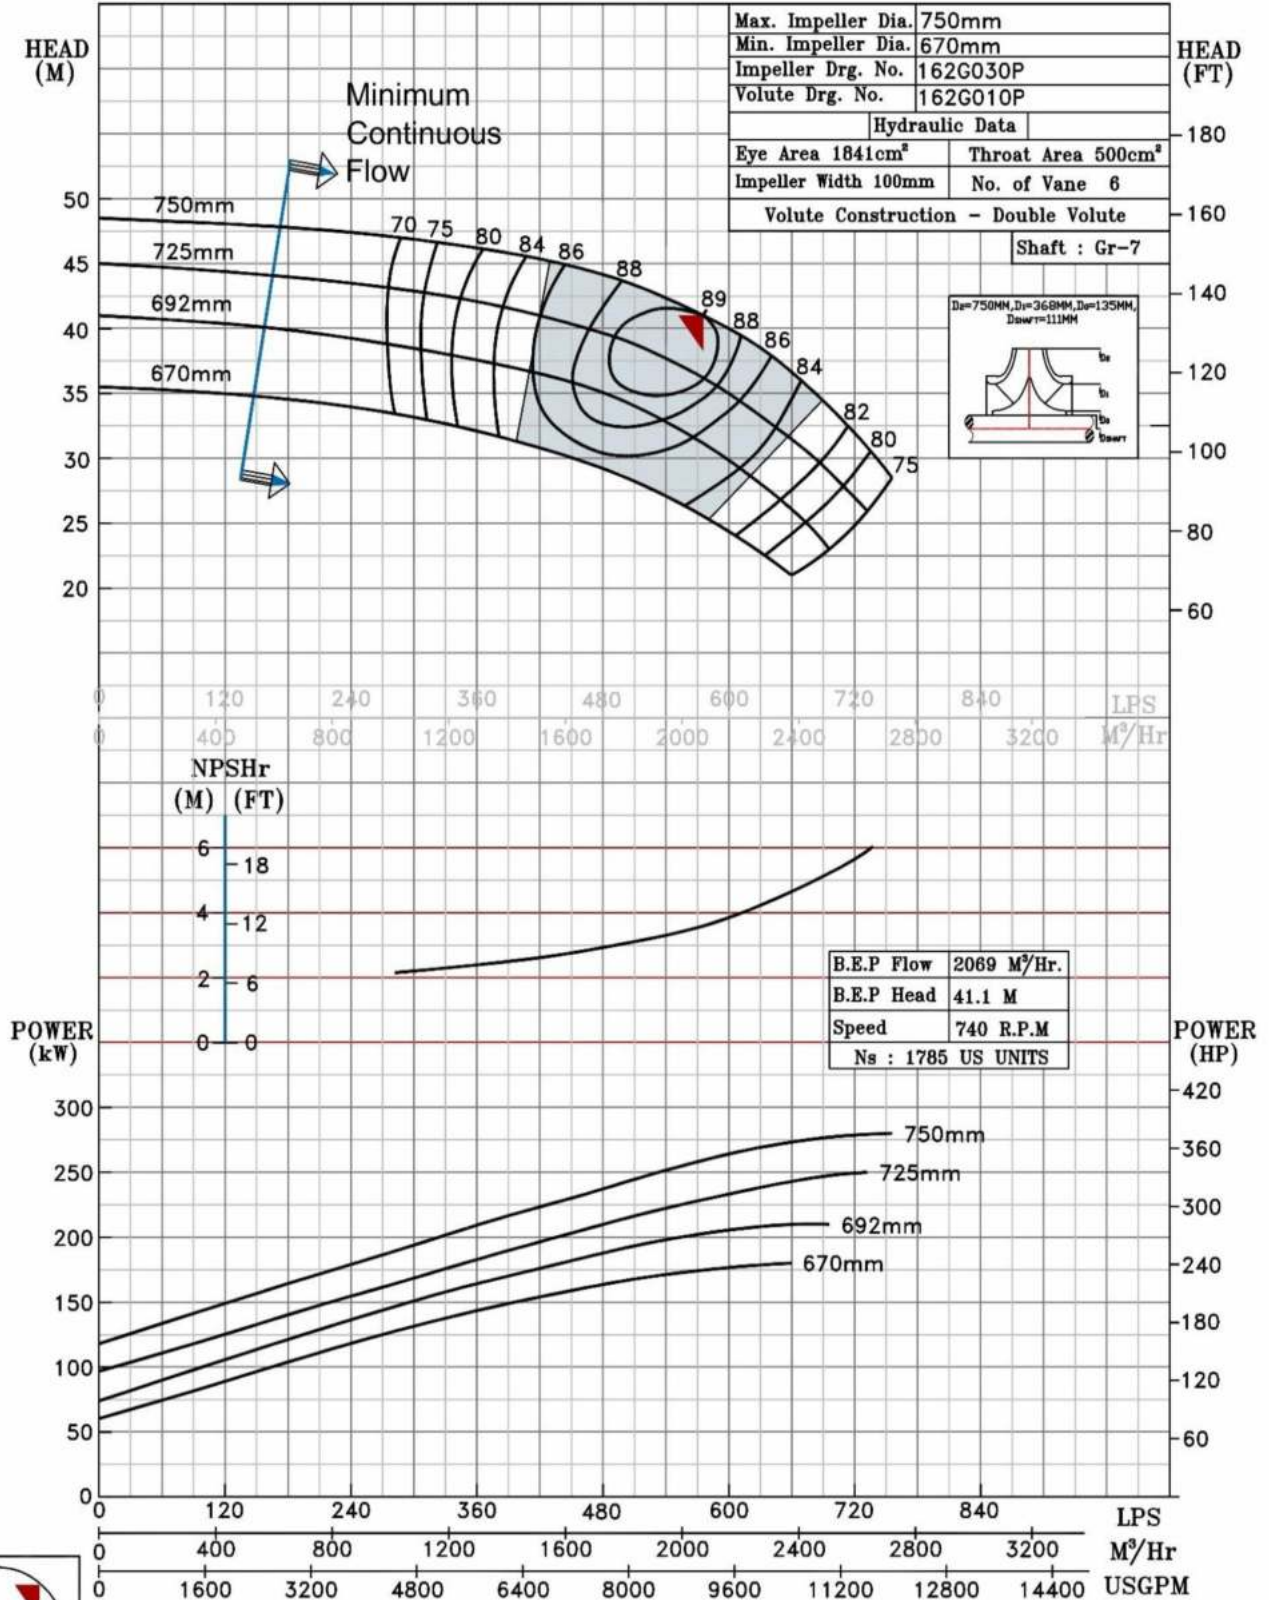

740 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 20HS19 @740 R.P.M

20HS19/X/106368

FISHER PUMP

HS RANGE

MODEL 20HS19

WORKING PRESS. 10 bar

SIZE 600x500-480


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 740 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G. 1.0

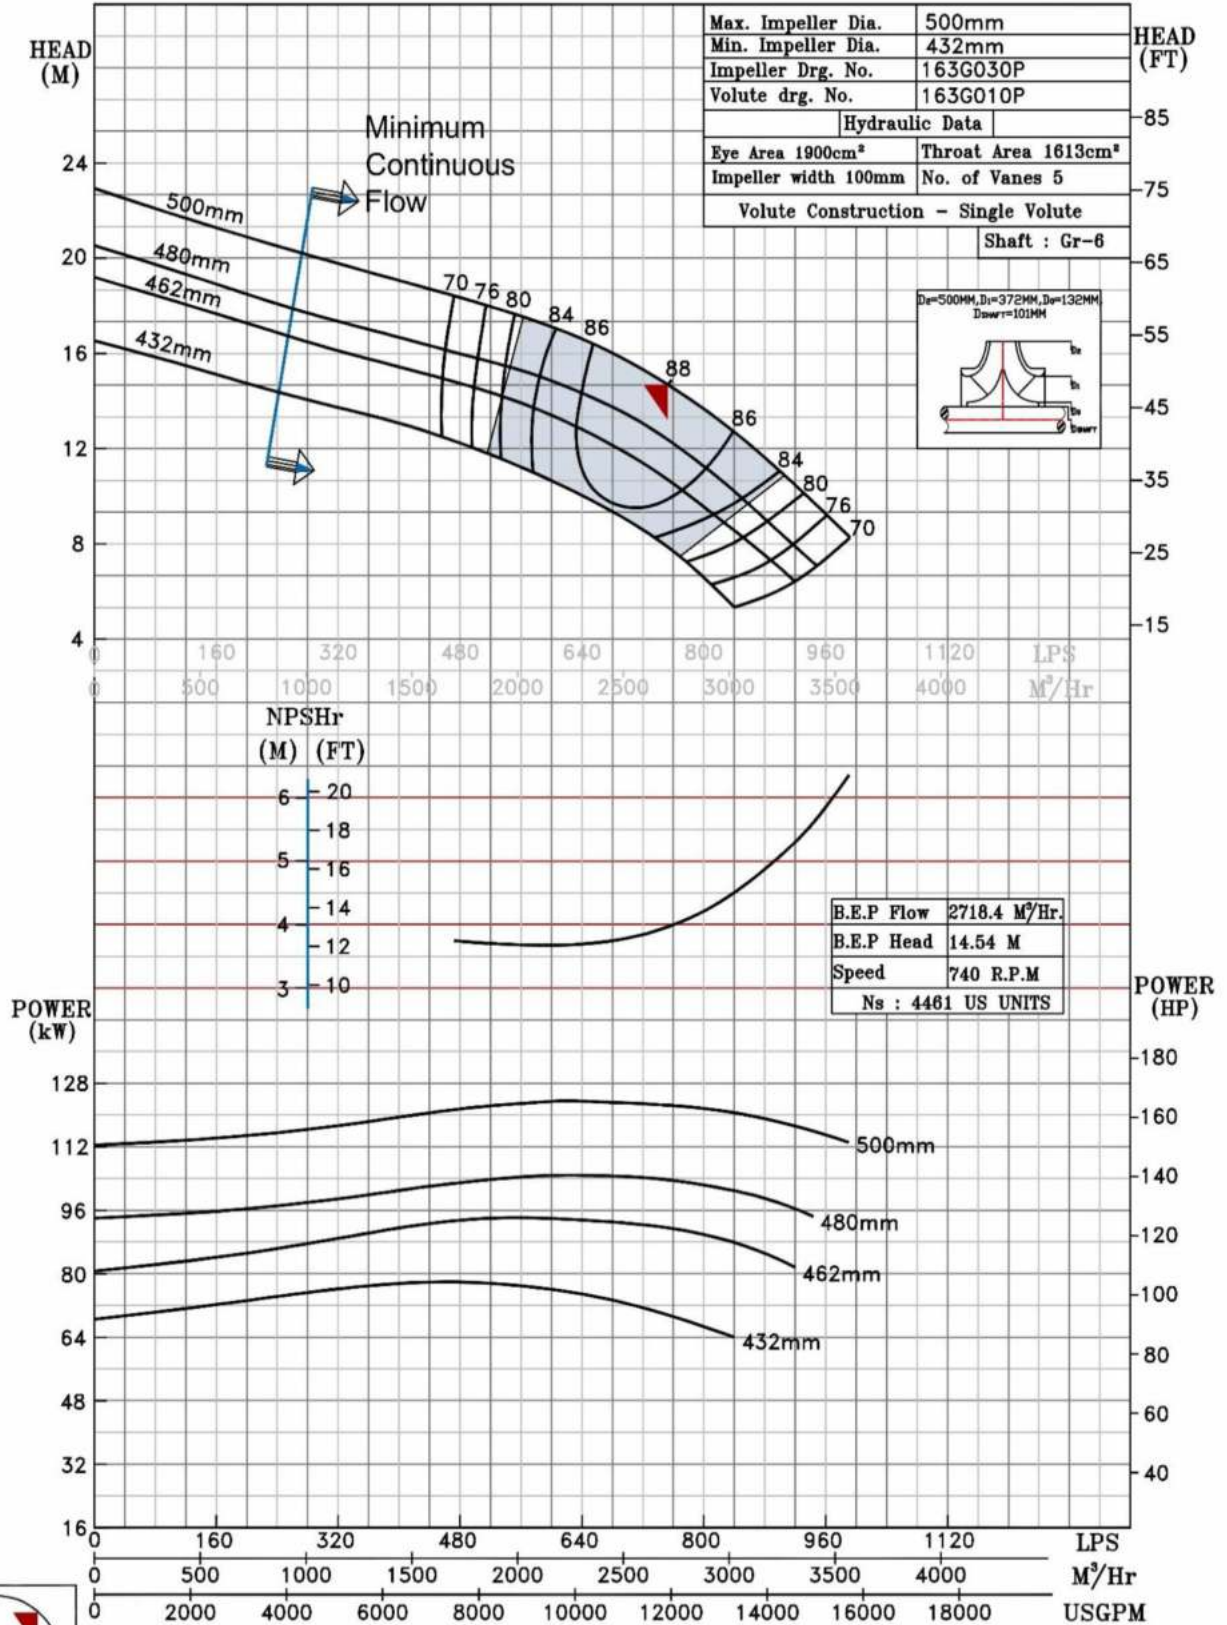


740 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 20HS23 @740 R.P.M		20HS23/X/106458	
FISHER PUMP	MODEL 20HS23	WORKING PRESS.	10 bar
	SIZE 600x500-580	TEST PRESS.	15 bar
	TYPE-AXIALLY SPLIT CASE SINGLE STAGE	SPEED 740 rpm	
HS RANGE			

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

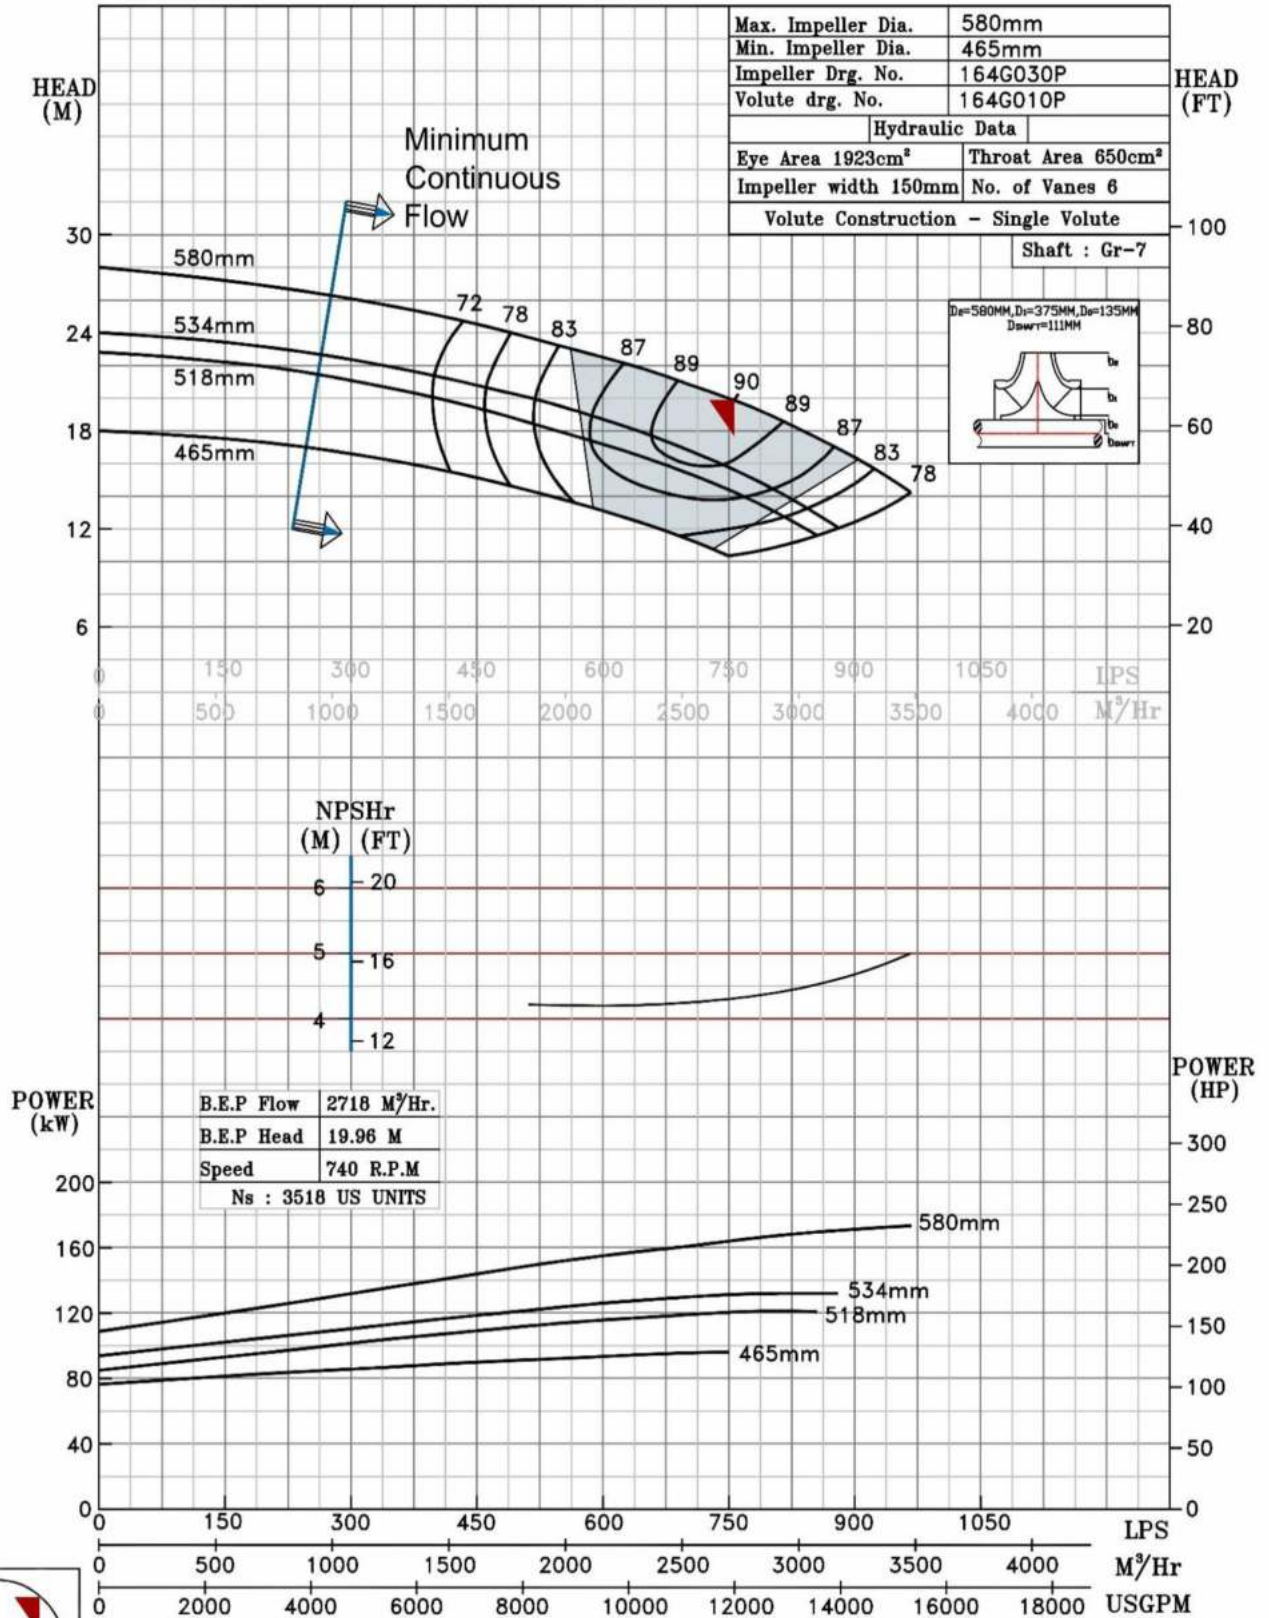

740 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 20HS25 @ 740 R.P.M

20HS25/X/106558

FISHER PUMP

HS RANGE

MODEL 20HS25

WORKING PRESS. 10 bar

SIZE 600x500-630


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 740 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

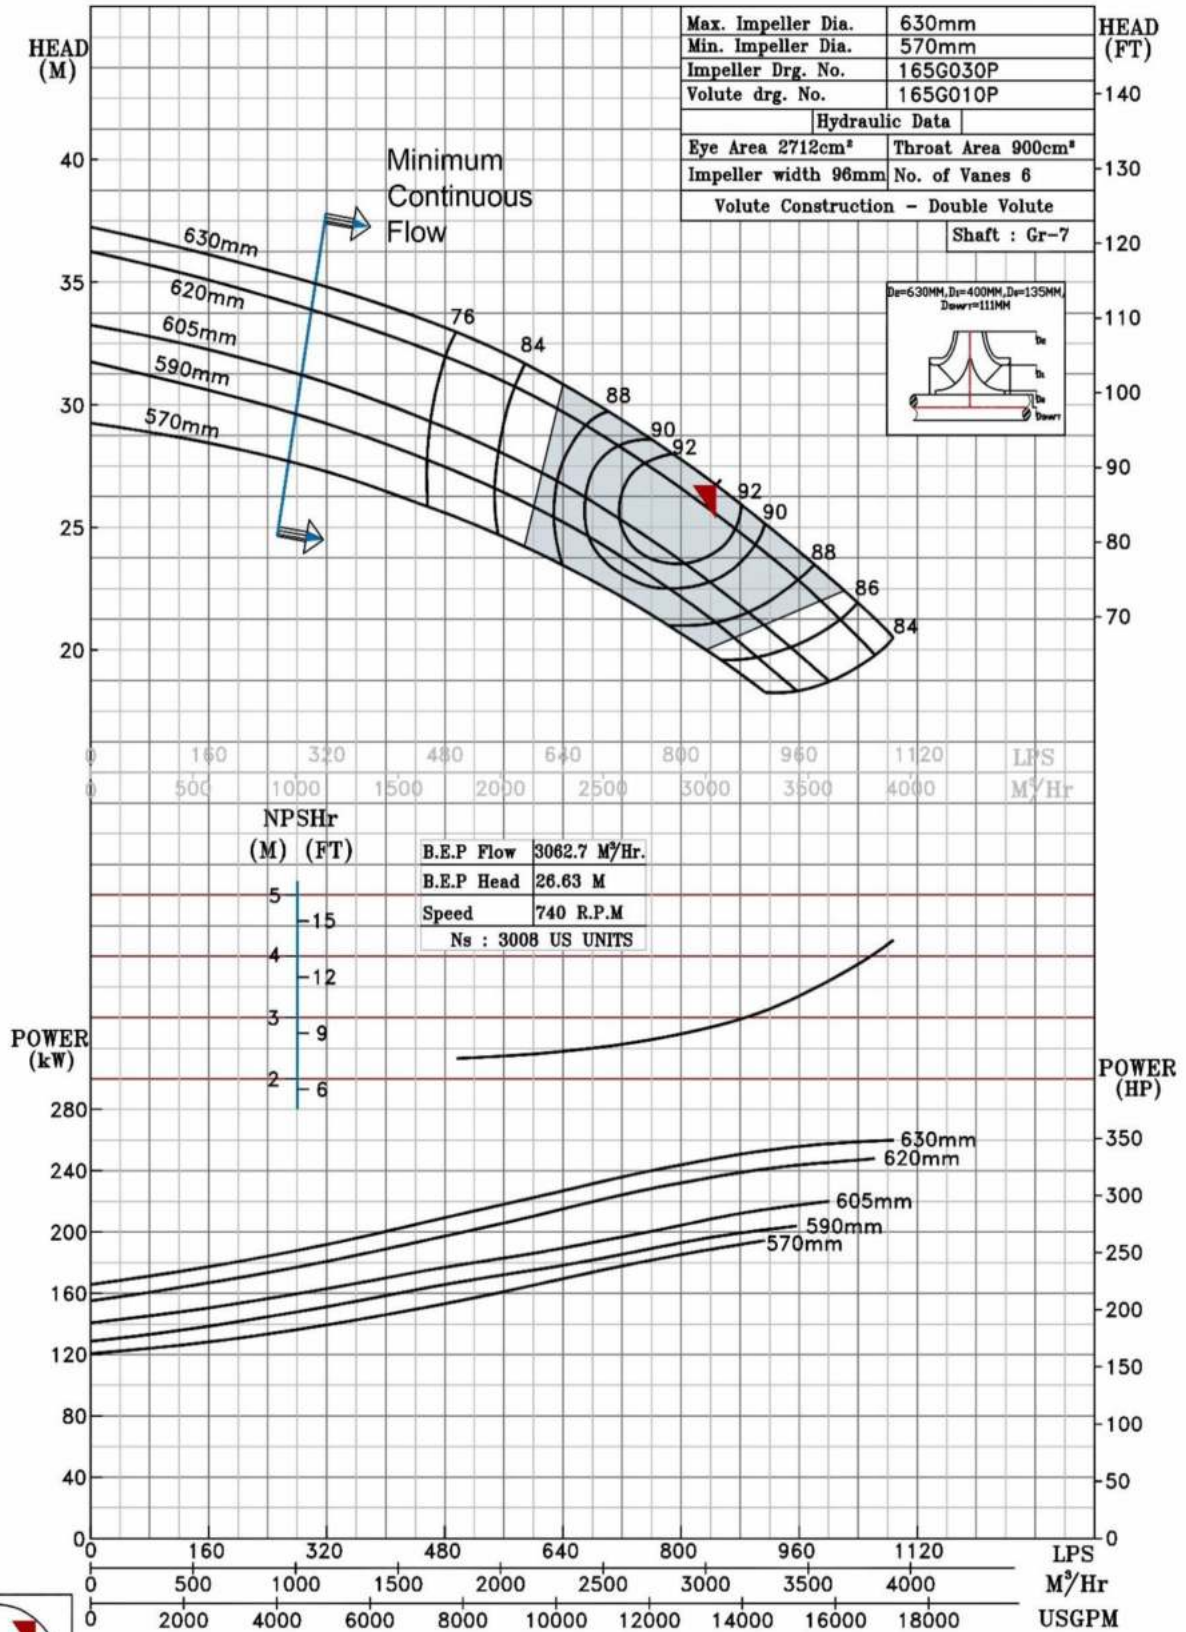

740 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 20HS27 @740 R.P.M

20HS27/X/106658

FISHER PUMP

HS RANGE

MODEL 20HS27

WORKING PRESS 12 bar

SIZE 600x500-675


TEST PRESS. 18 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 740 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

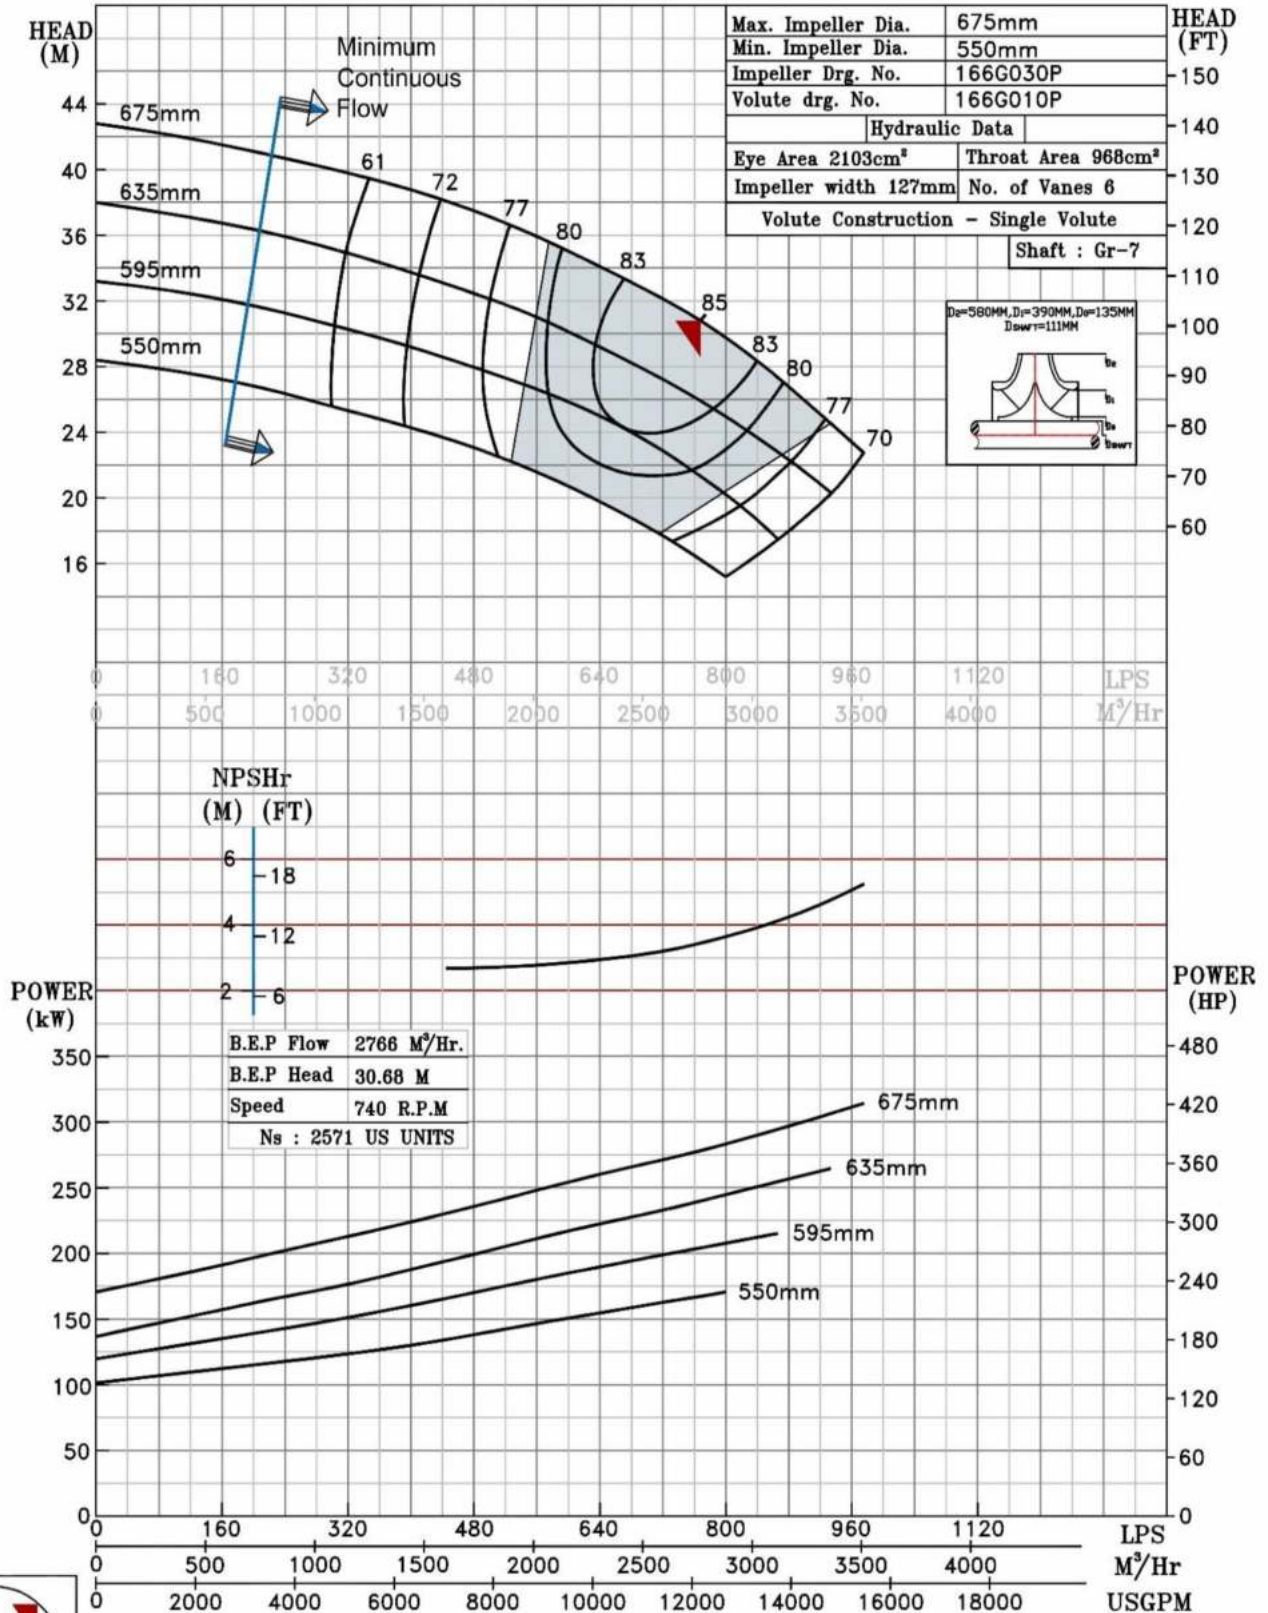

740 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 20HS31 @740 R.P.M

20HS31/X/106758


FISHER PUMP

HS RANGE

MODEL 20HS31	WORKING PRESS. 16 bar
SIZE 600x500-780	TEST PRESS. 24 bar
TYPE-AXIALLY SPLIT CASE SINGLE STAGE	SPEED 740 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

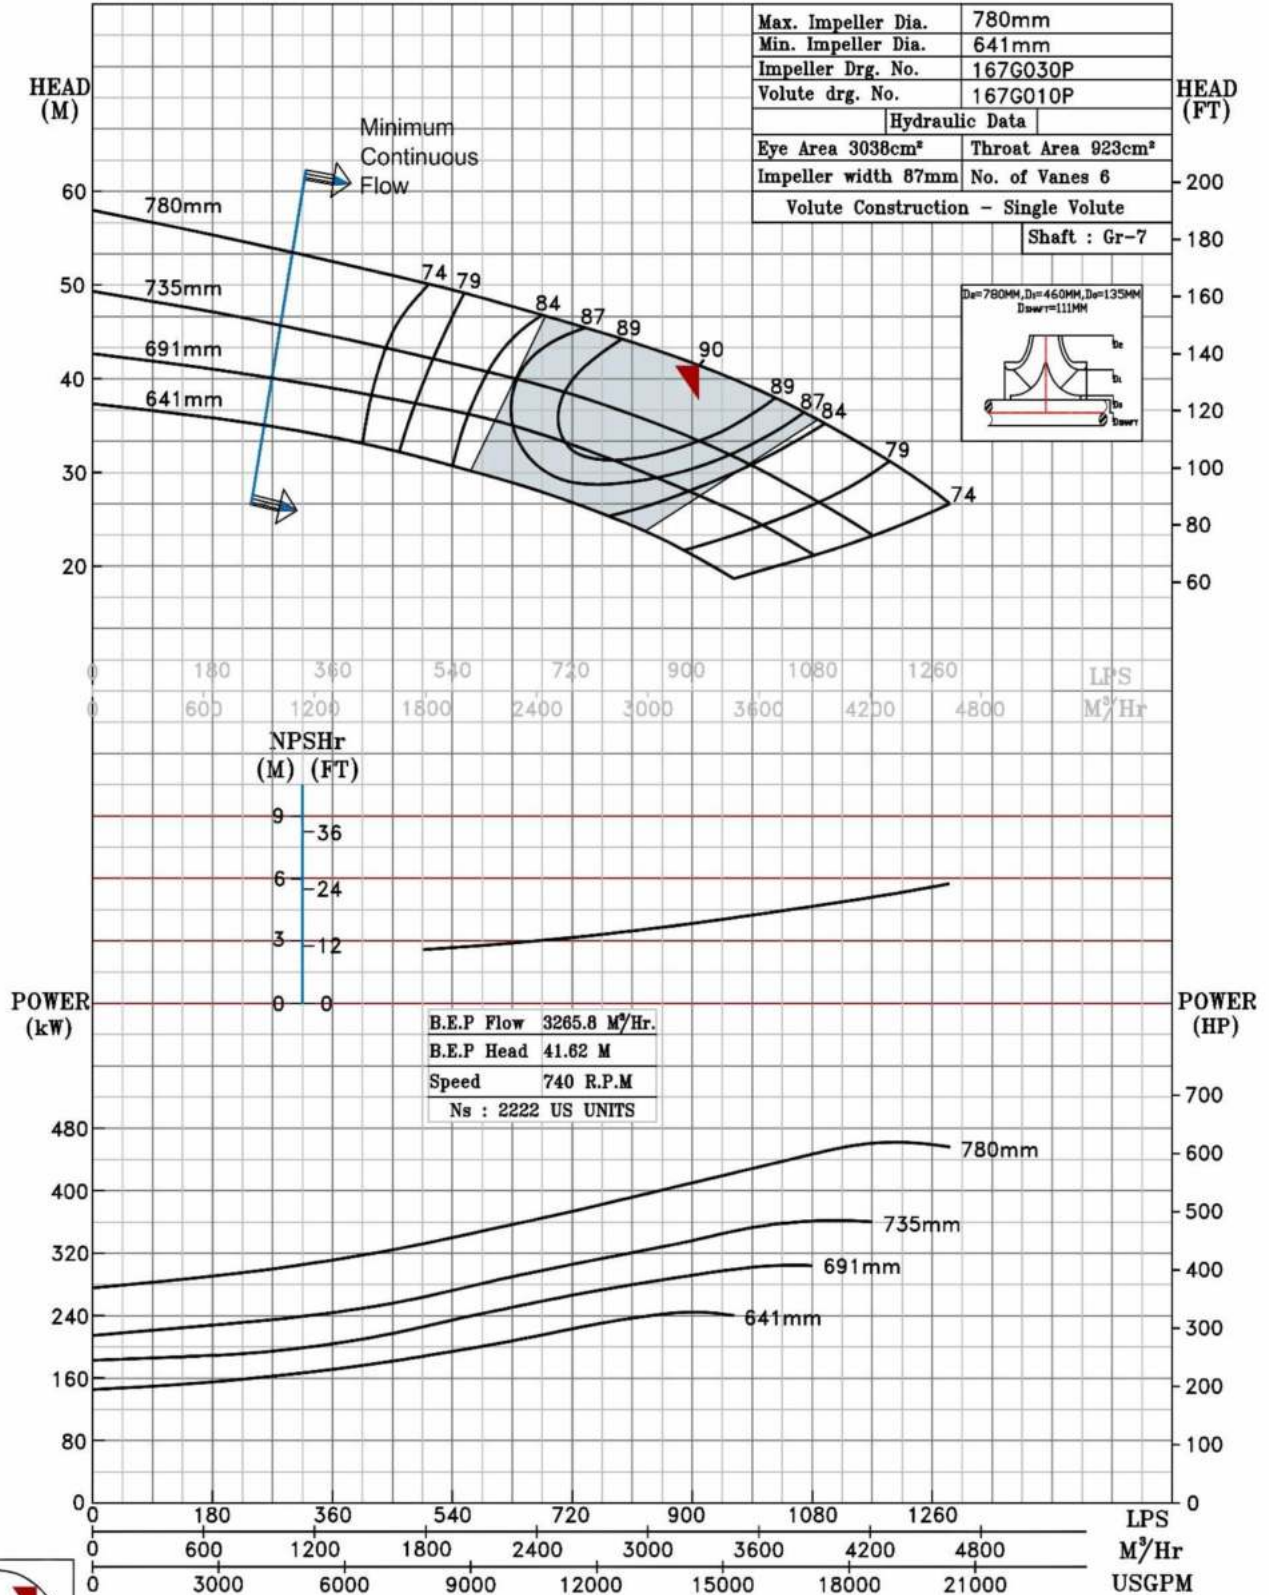

740 RPM