

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 10HS22 @900 R.P.M

10HS22/Y/103768

FISHER PUMP

HS RANGE

MODEL 10HS22

WORKING PRESS 16 bar

SIZE 300x250-568


TEST PRESS. 24 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 900 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

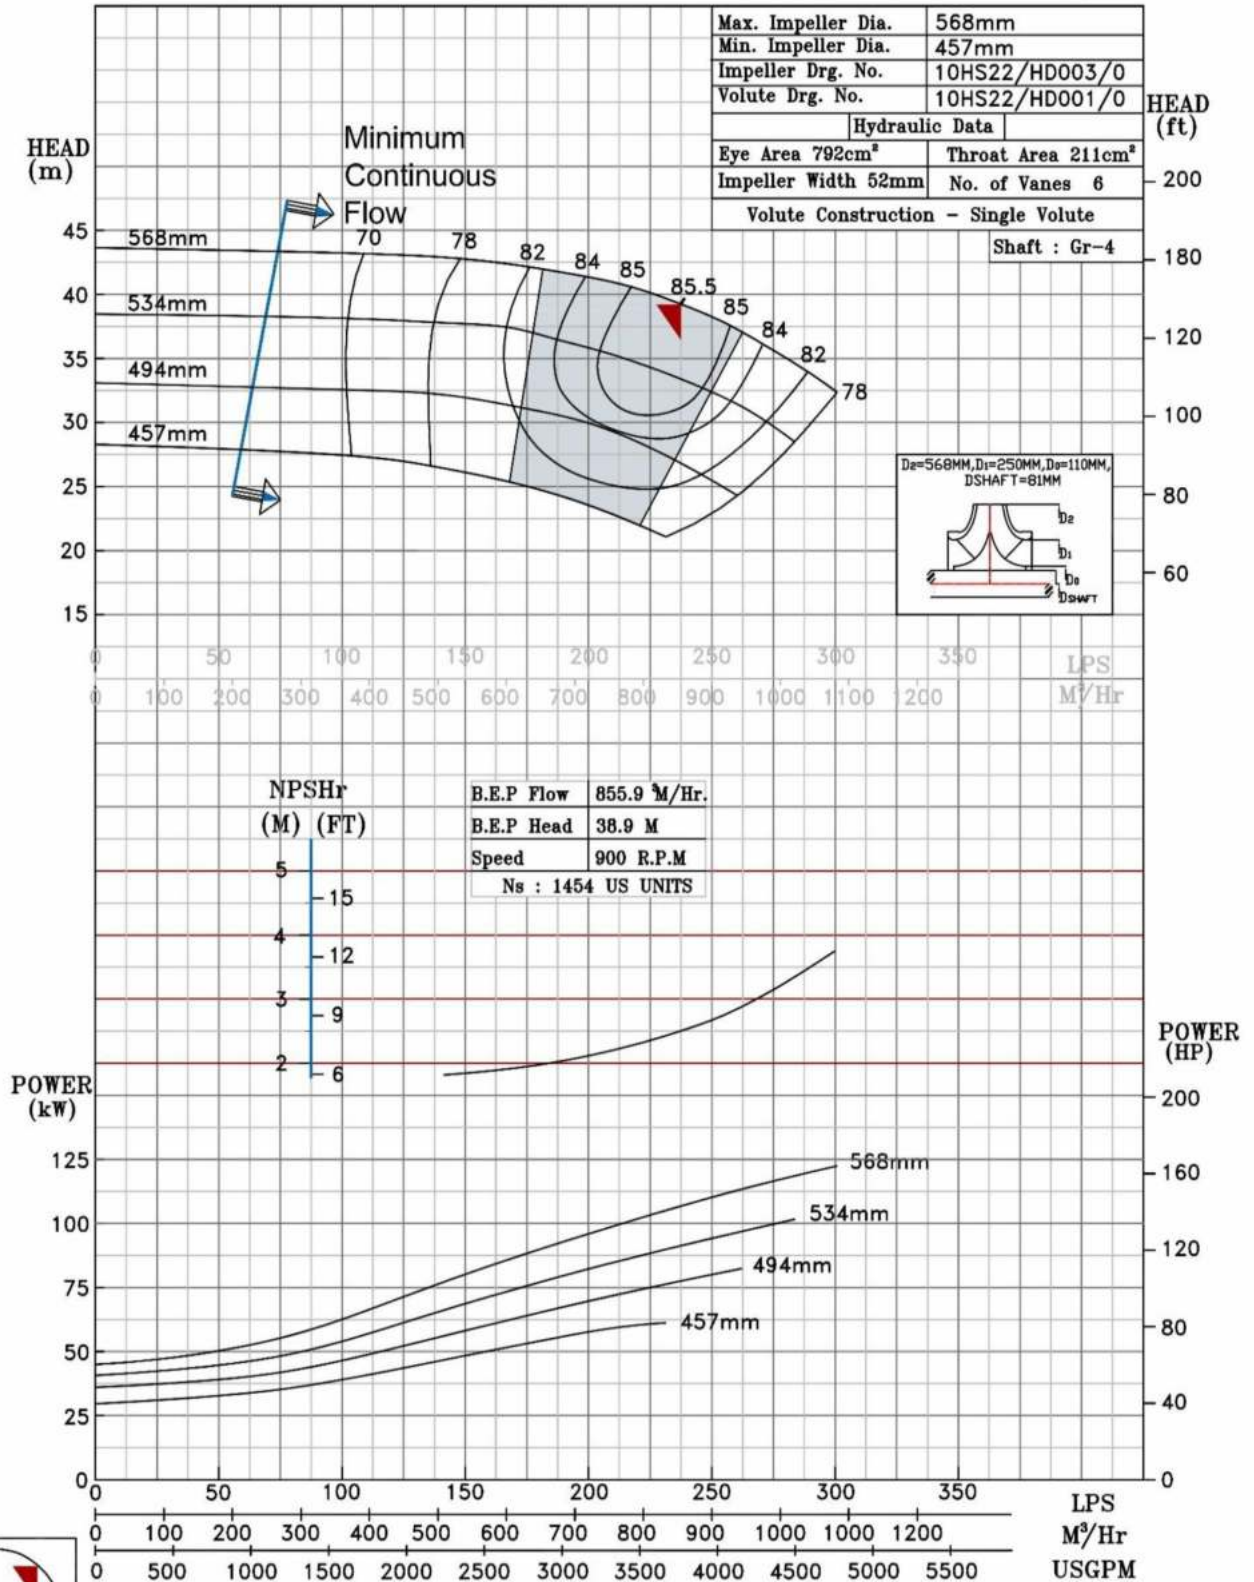

900 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 10HS27 @900 R.P.M

10HS27/X/103868

FISHER PUMP

HS RANGE

MODEL 10HS27

WORKING PRESS. 16 bar

SIZE 300x250-690


TEST PRESS. 24 bar

TYPE-AXIALY SPLIT CASE SINGLE STAGE

SPEED 900 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

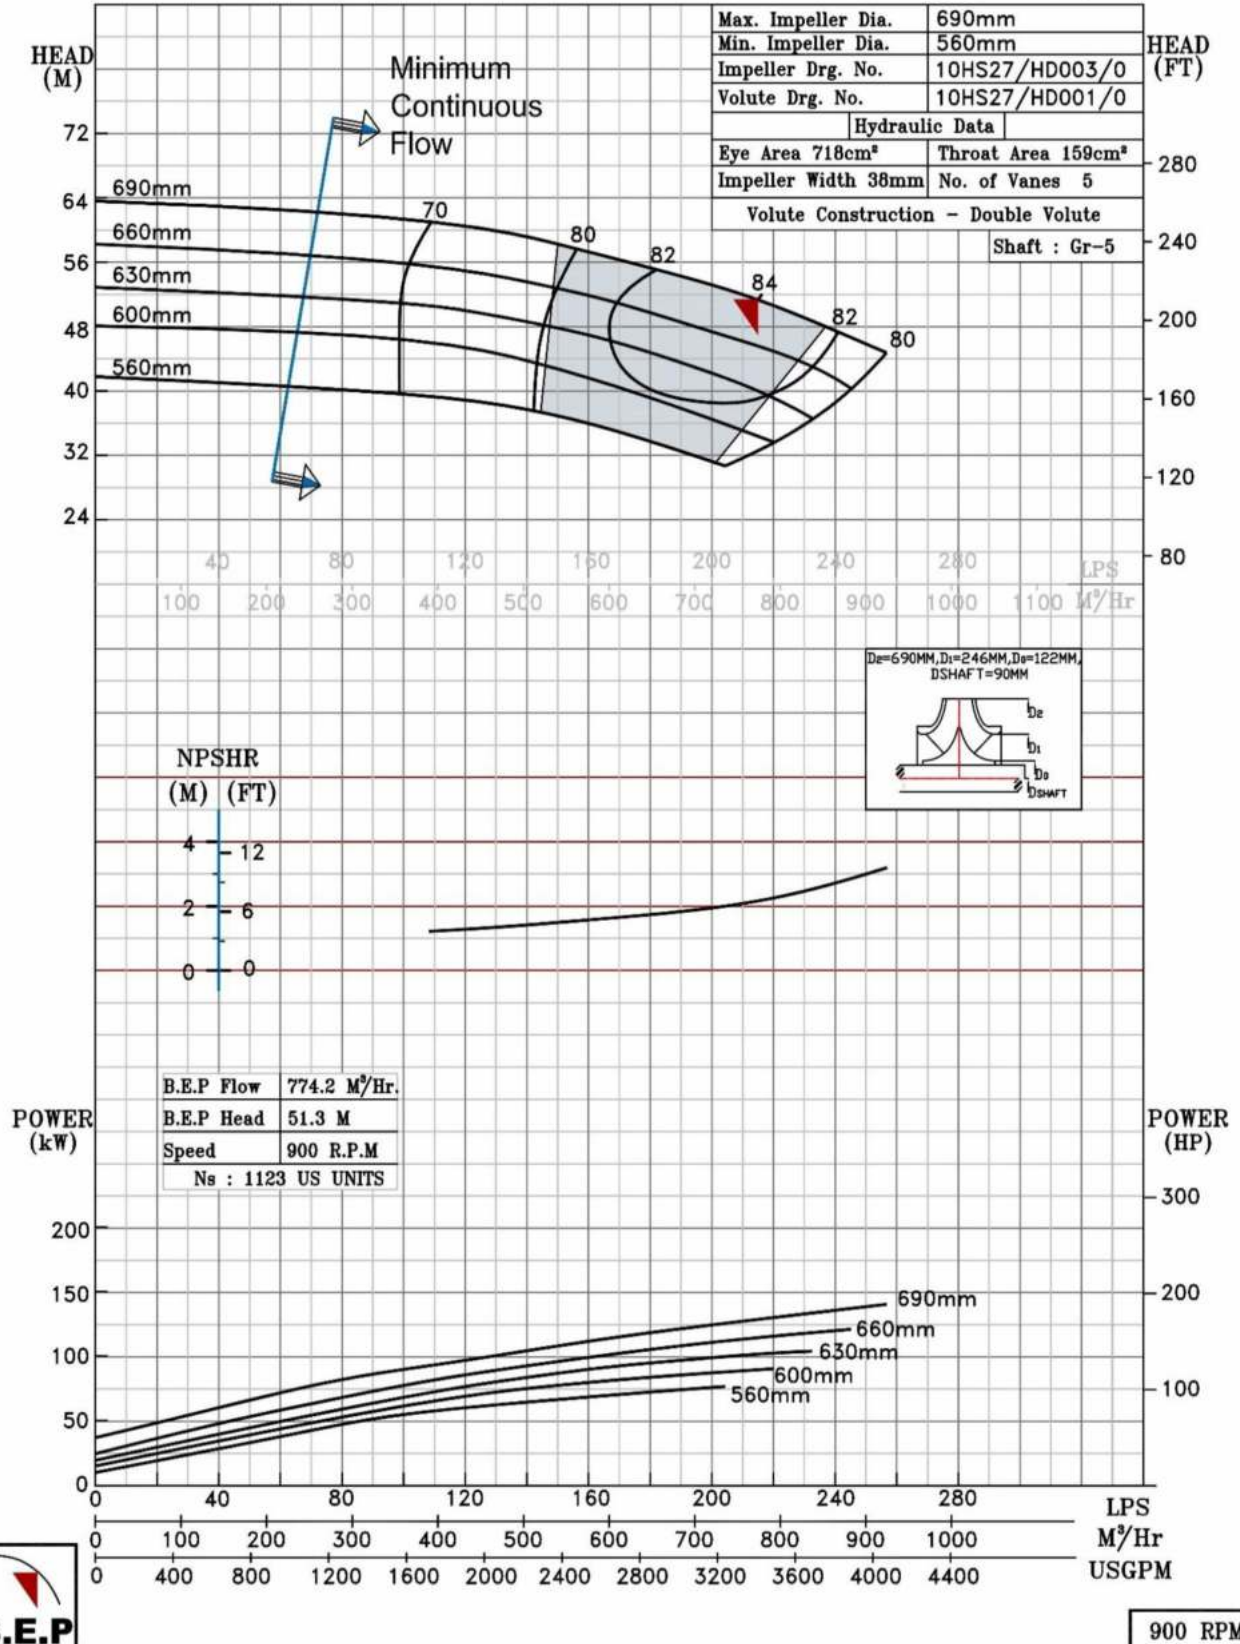

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 12HS13 @900 R.P.M

12HS13/X/103968

FISHER PUMP

HS RANGE

MODEL 12HS13

WORKING PRESS. 16 bar

SIZE 350x300-325


TEST PRESS. 24 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 900 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PERFORMANCE CHARACTERISTICS BASED UPON CLEAN COLD WATER - ADD 0.5m TO NPSHR FOR SAFETY

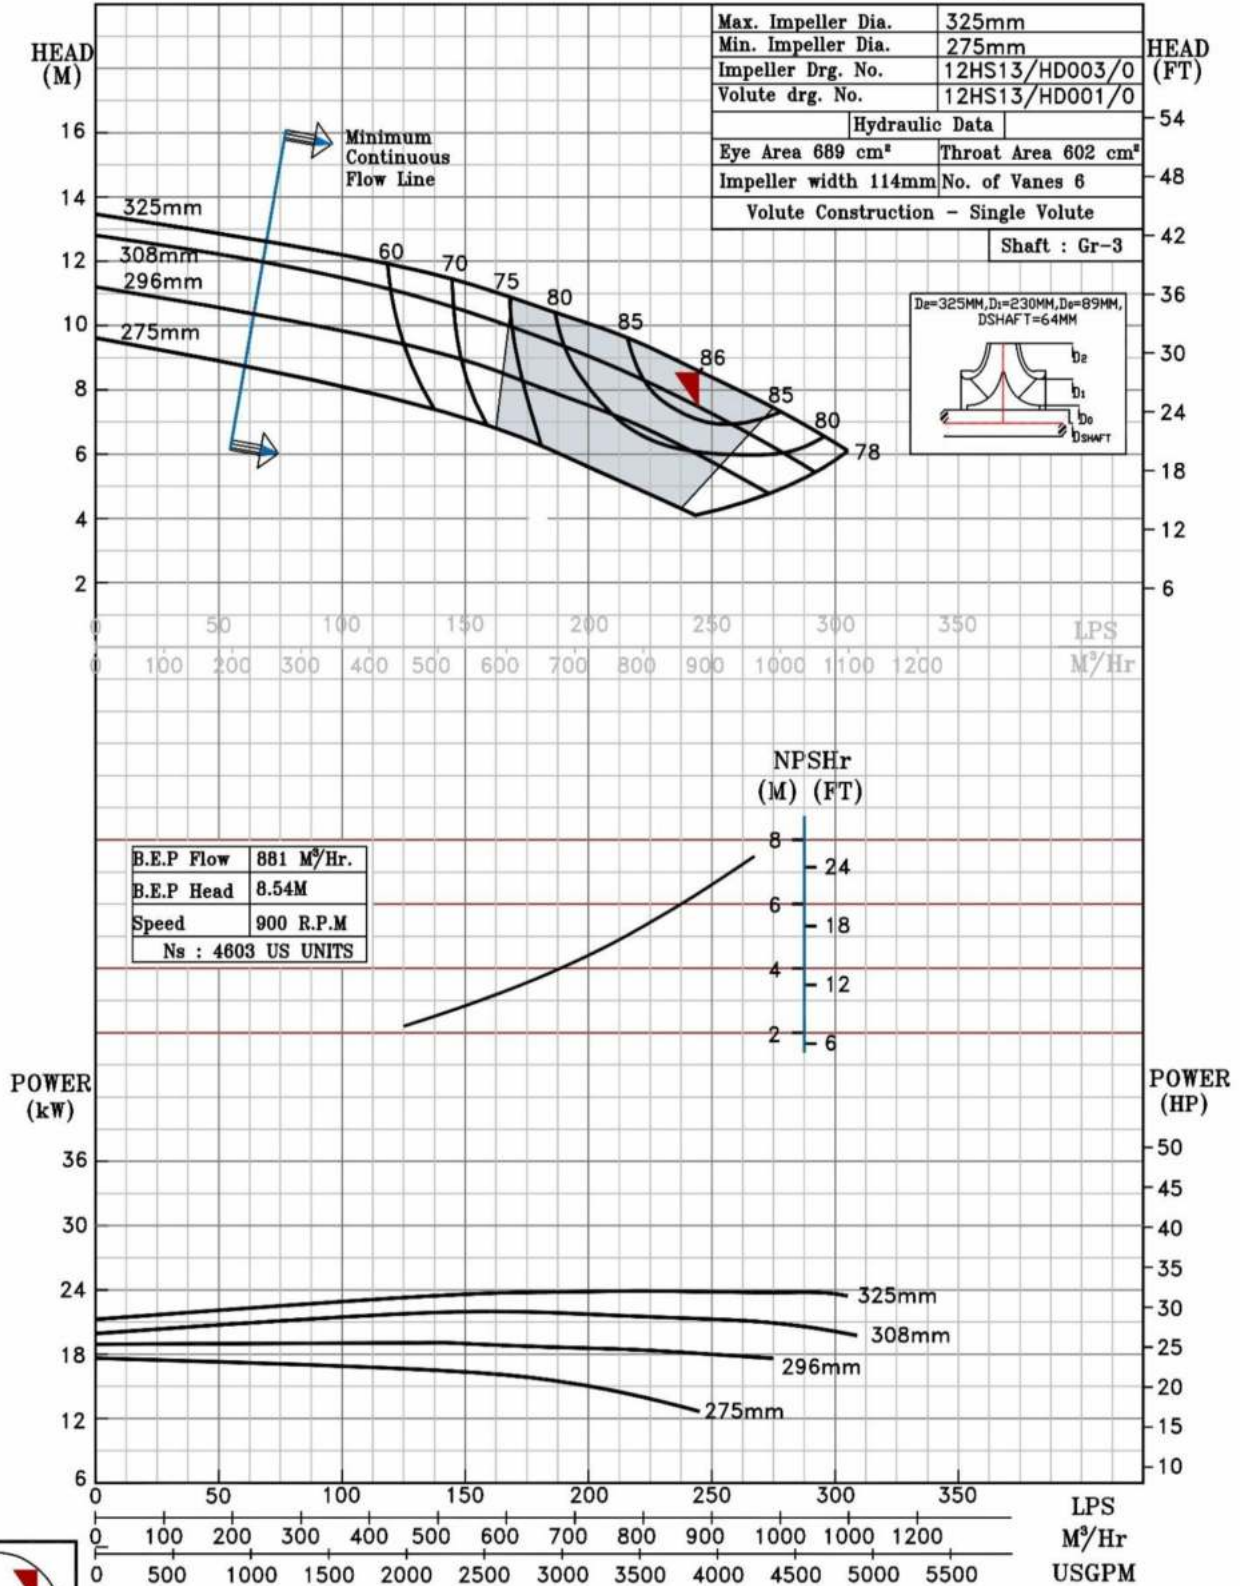

900 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 12HS15 @900 R.P.M

12HS15/X/104068


FISHER PUMP

HS RANGE

MODEL 12HS15	WORKING PRESS.	16 bar
SIZE 350x300-380	TEST PRESS.	24 bar
TYPE-AXIALLY SPLIT CASE SINGLE STAGE		
SPEED 900 rpm		

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

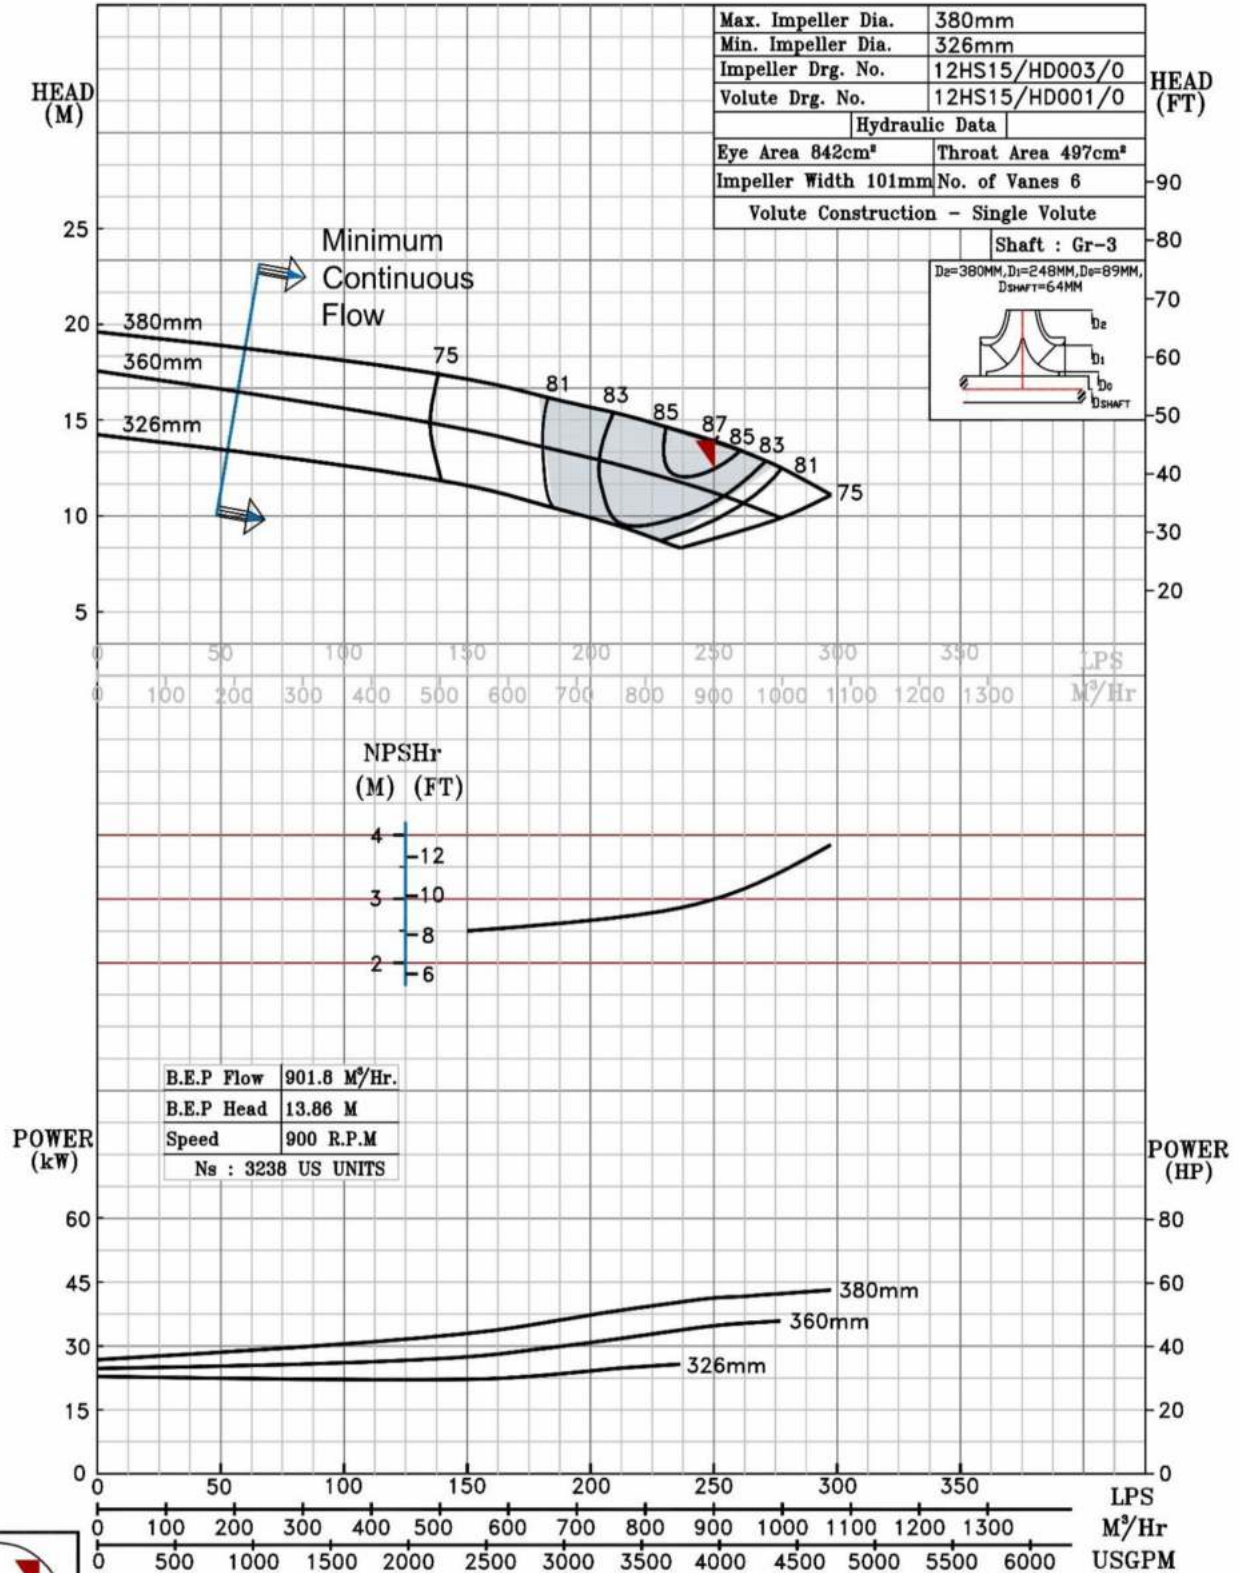

900 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 12HS16 @900 R.P.M

12HS16/X/104168

FISHER PUMP

HS RANGE

MODEL 12HS16

WORKING PRESS. 16 bar

SIZE 400x300-396


TEST PRESS. 24 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 900 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

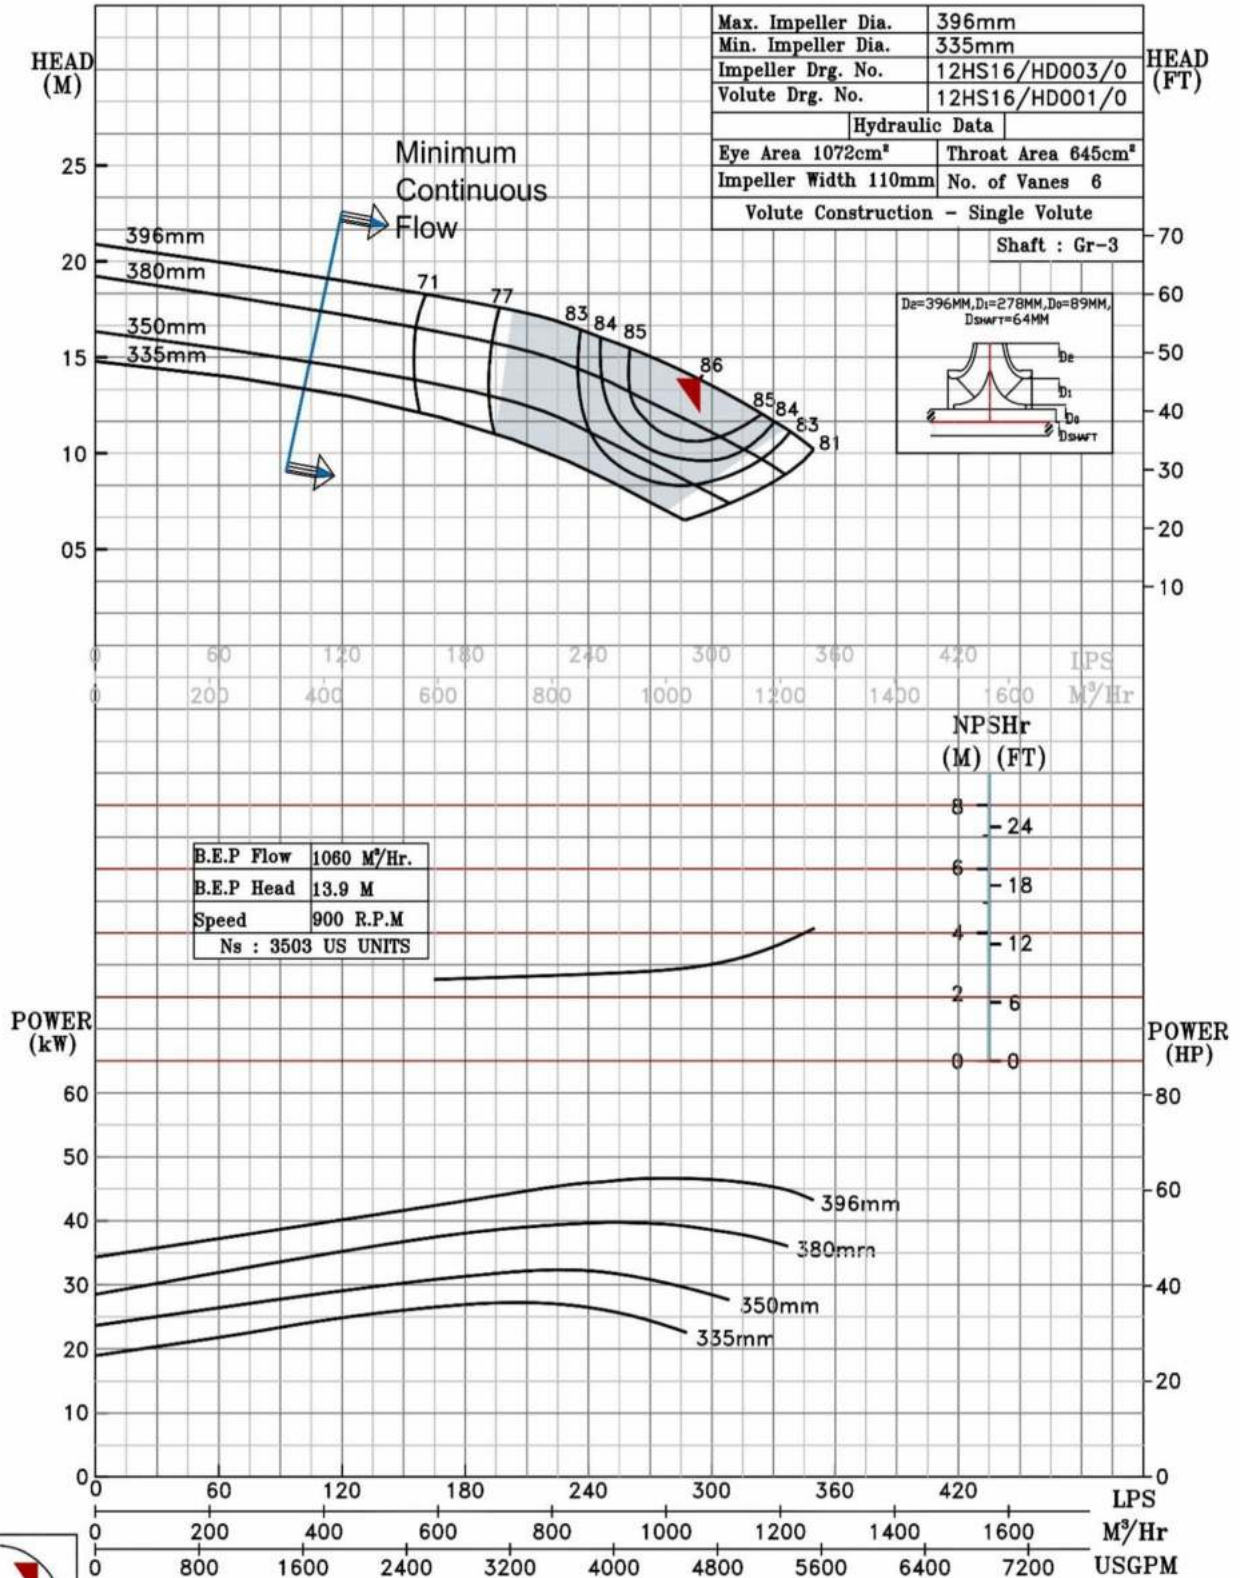


900 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 12HS18 @900 R.P.M		12HS18/X/104268	
FISHER PUMP	MODEL 12HS18	WORKING PRESS.	16 bar
	SIZE 350x300-462	TEST PRESS.	24 bar
	TYPE-AXIALLY SPLIT CASE SINGLE STAGE	SPEED 900 rpm	
HS RANGE			

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

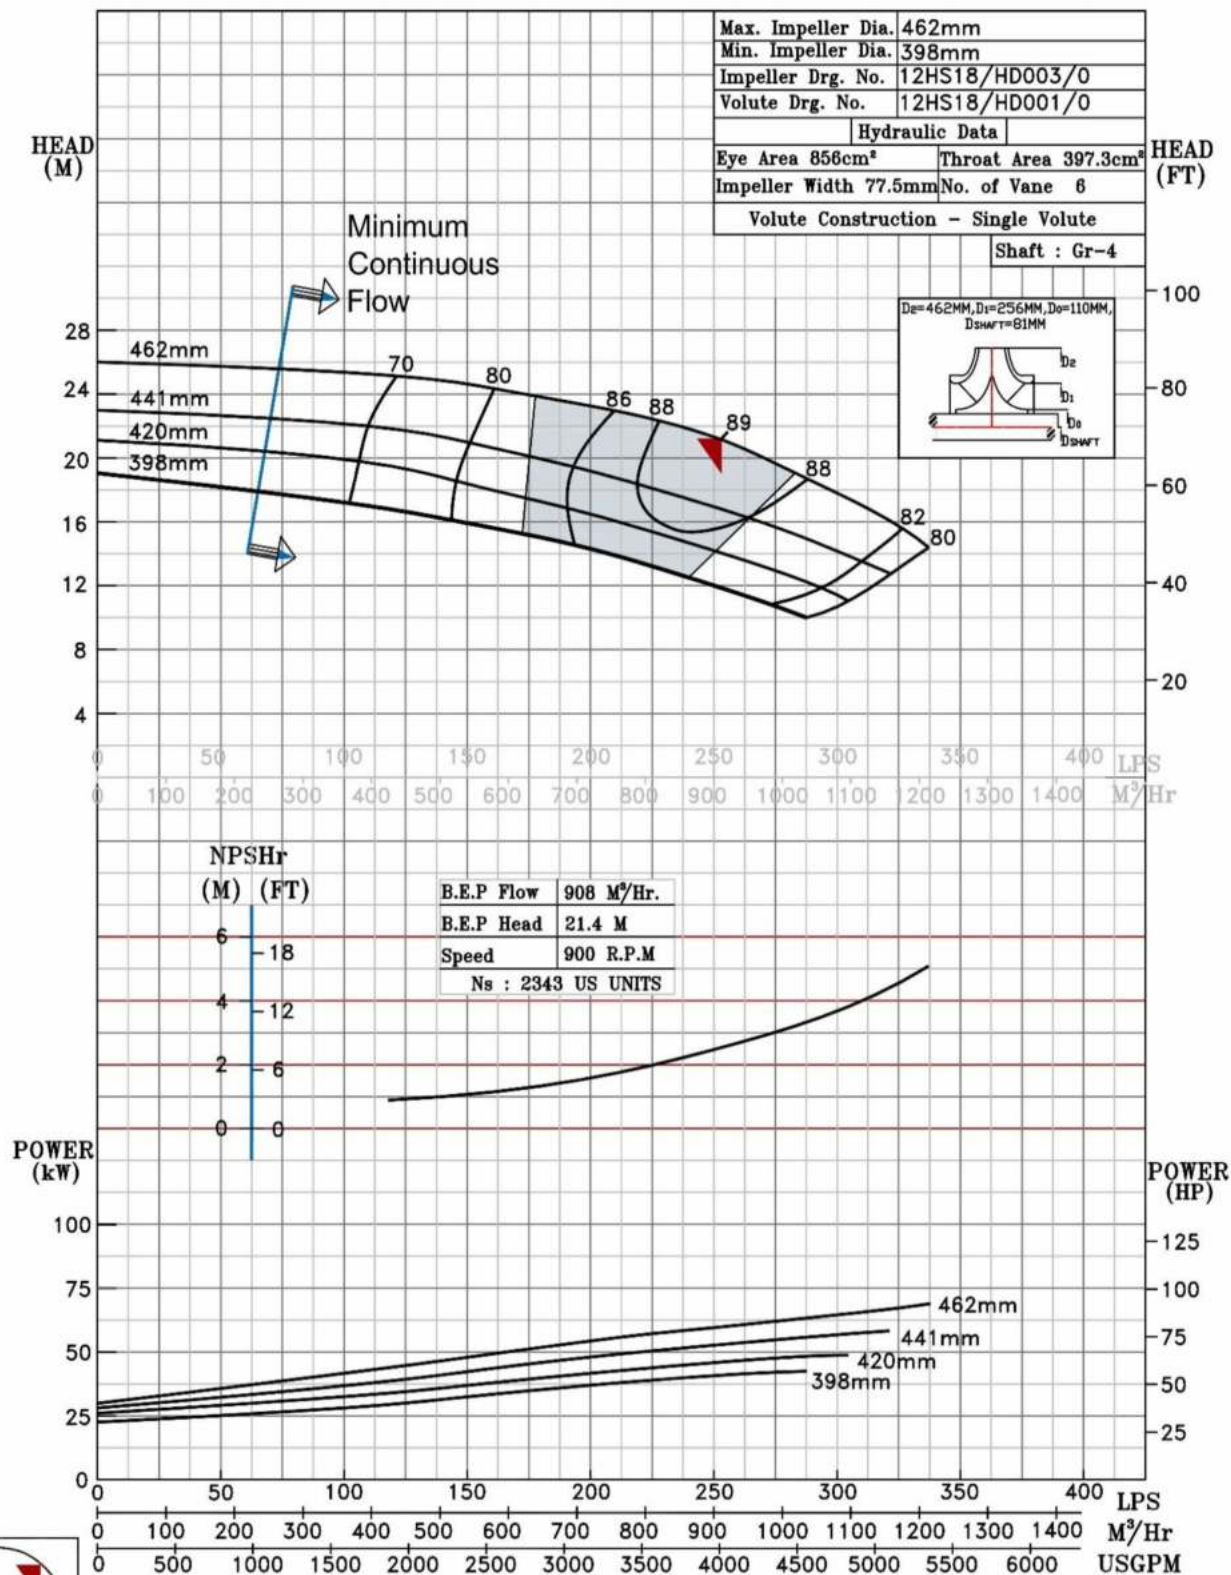


900 RPM

PERFORMANCE CURVE OF 12HS22 @900 R.P.M		12HS22/X/104368	
FISHER PUMP	MODEL 12HS22	WORKING PRESS.	16 bar
	SIZE 350x300-555.5	TEST PRESS.	24 bar
	TYPE-AXIALLY SPLIT CASE SINGLE STAGE	SPEED 900 rpm	
HS RANGE			

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

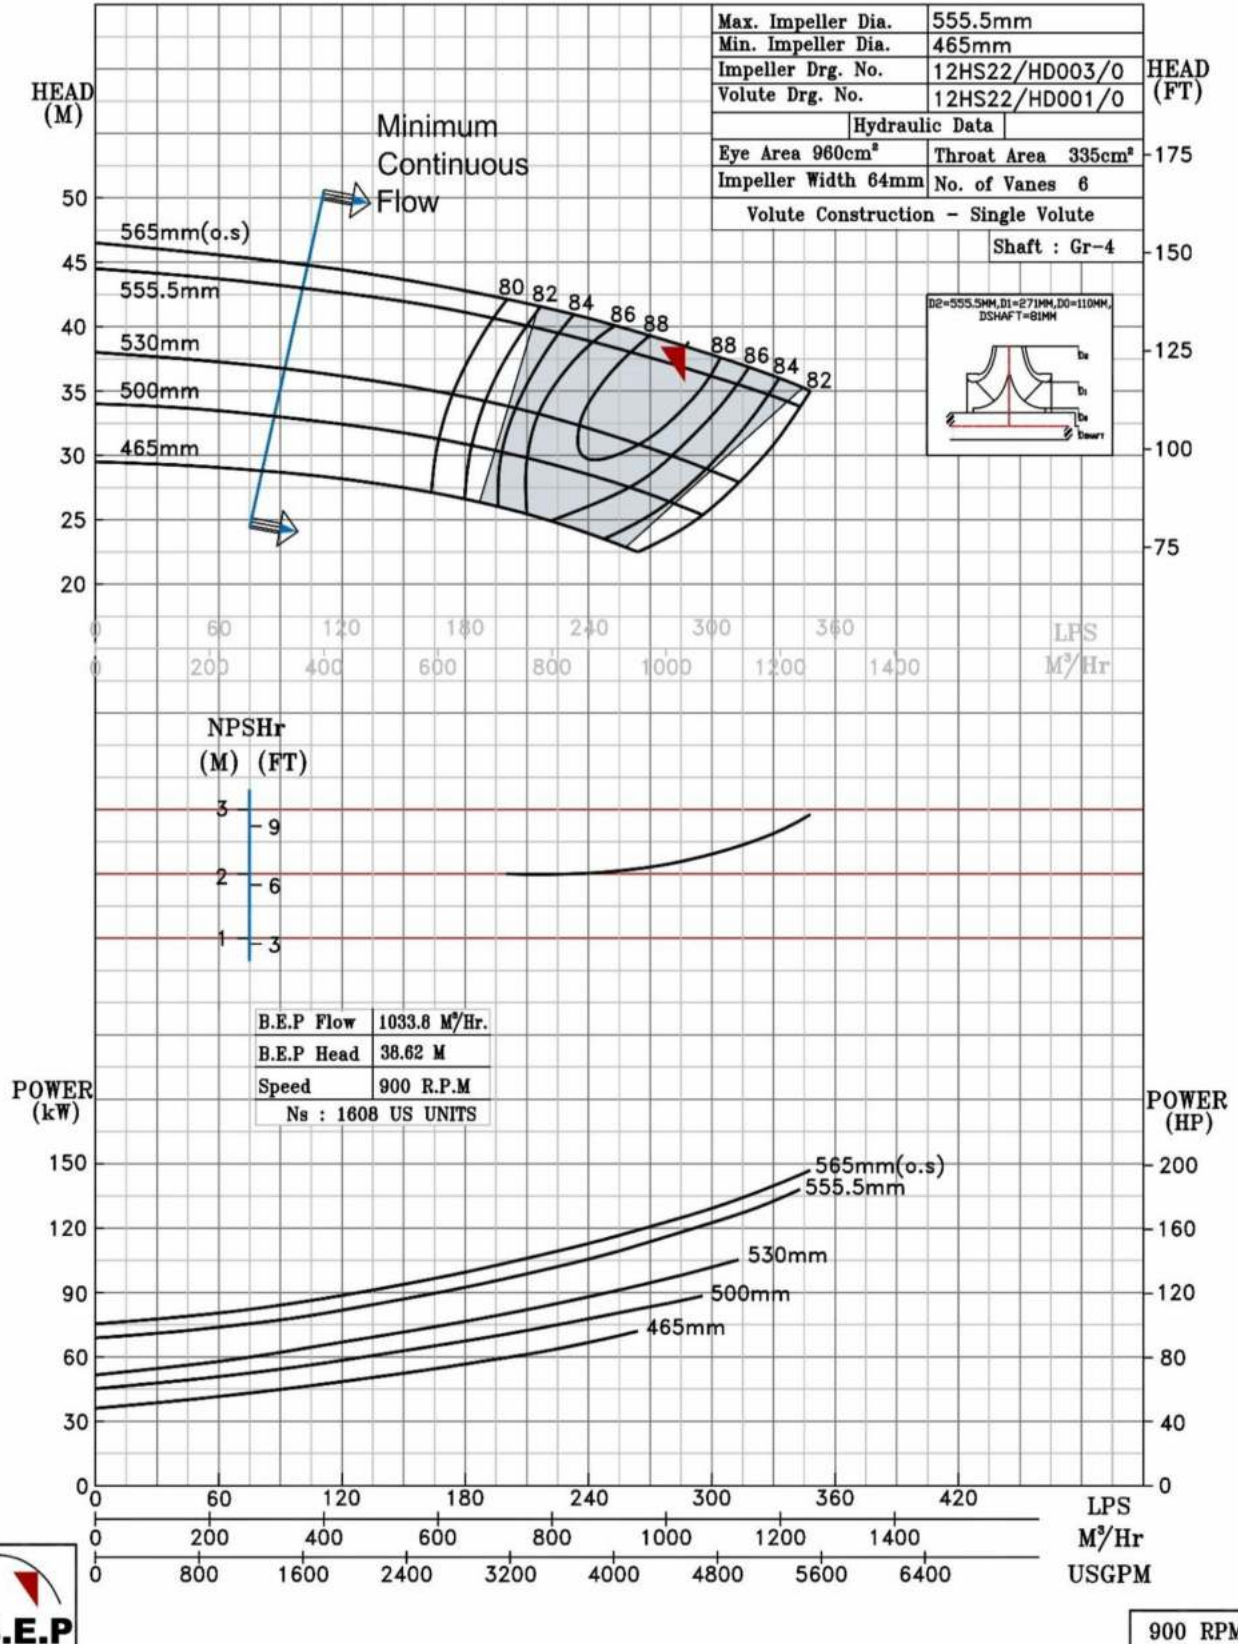


NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 12HS23 @900 R.P.M		12HS23/X/104468	
FISHER PUMP	HS RANGE	MODEL 12HS23	WORKING PRESS. 16 bar
		SIZE 350x300-595	TEST PRESS. 24 bar
		TYPE-AXIALLY SPLIT CASE SINGLE STAGE	
		SPEED 900 rpm	

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

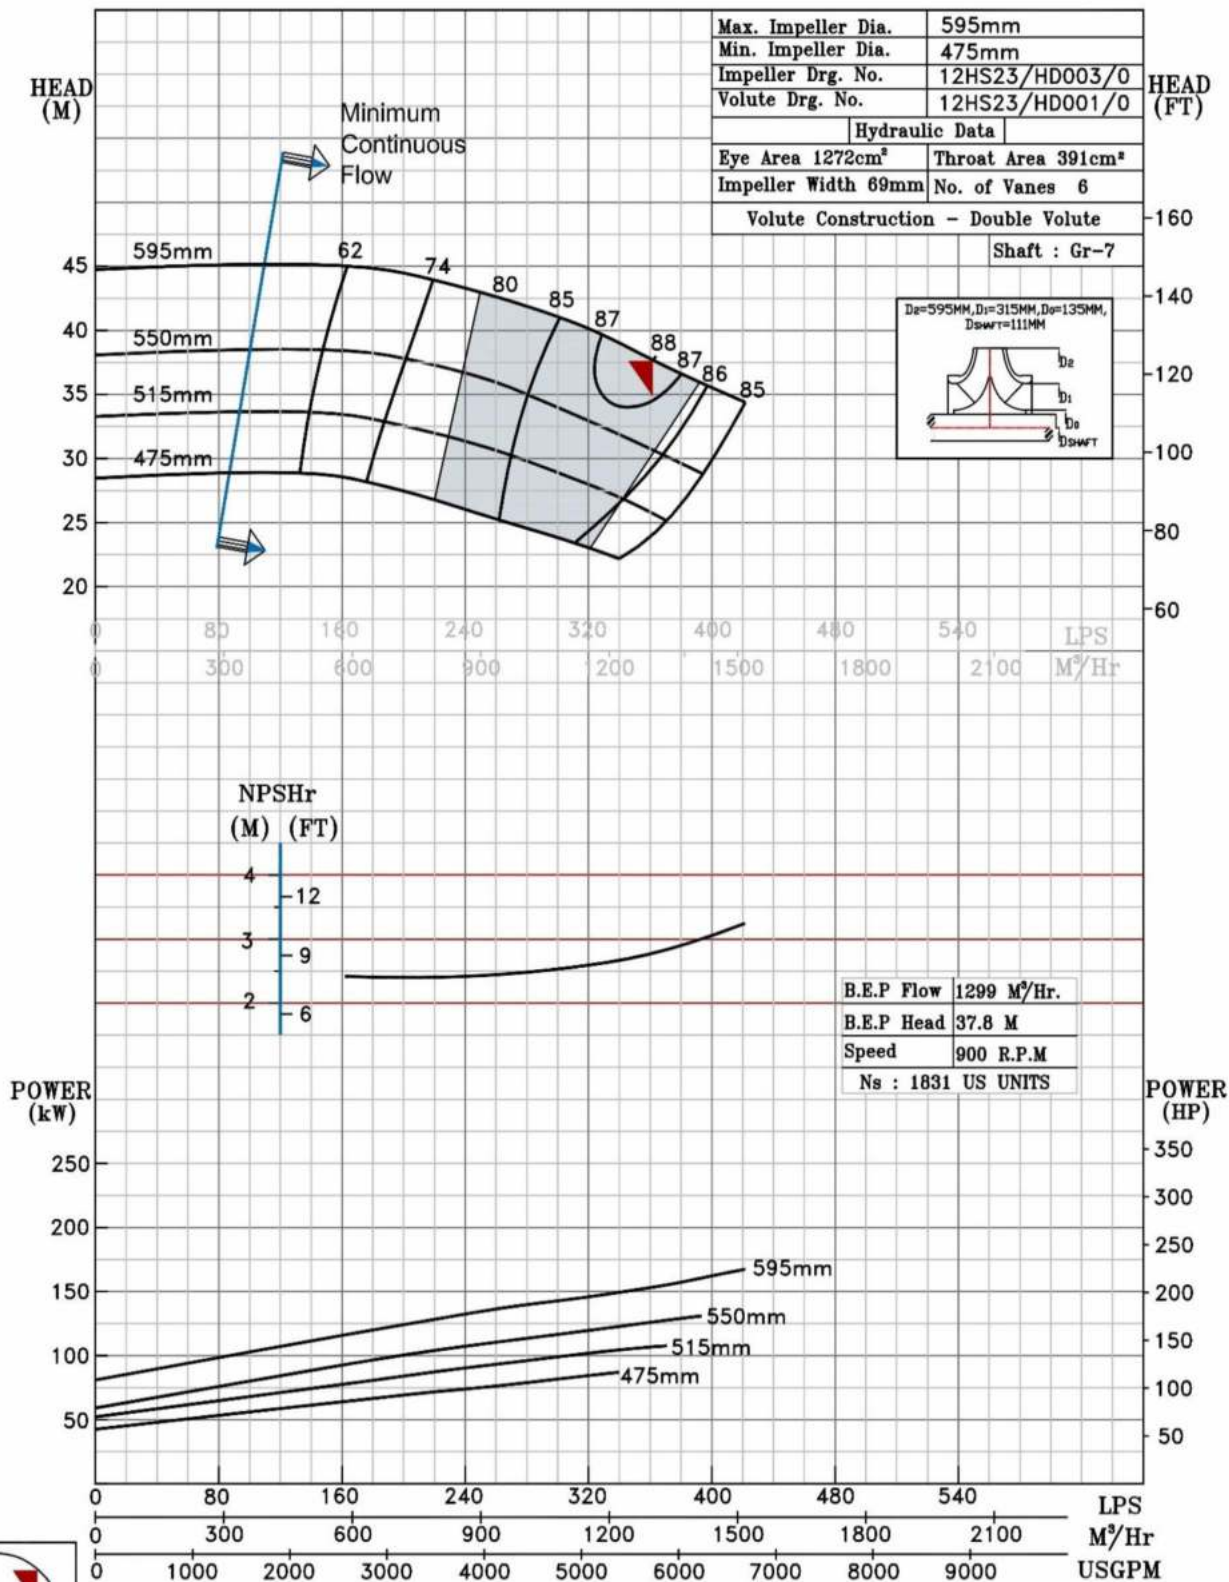

900 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 12HS26 @900 R.P.M

12HS26/X/104568

FISHER PUMP

HS RANGE

MODEL 12HS26

WORKING PRESS. 20 bar

SIZE 350x300-660


TEST PRESS. 30 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 900 rpm


SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

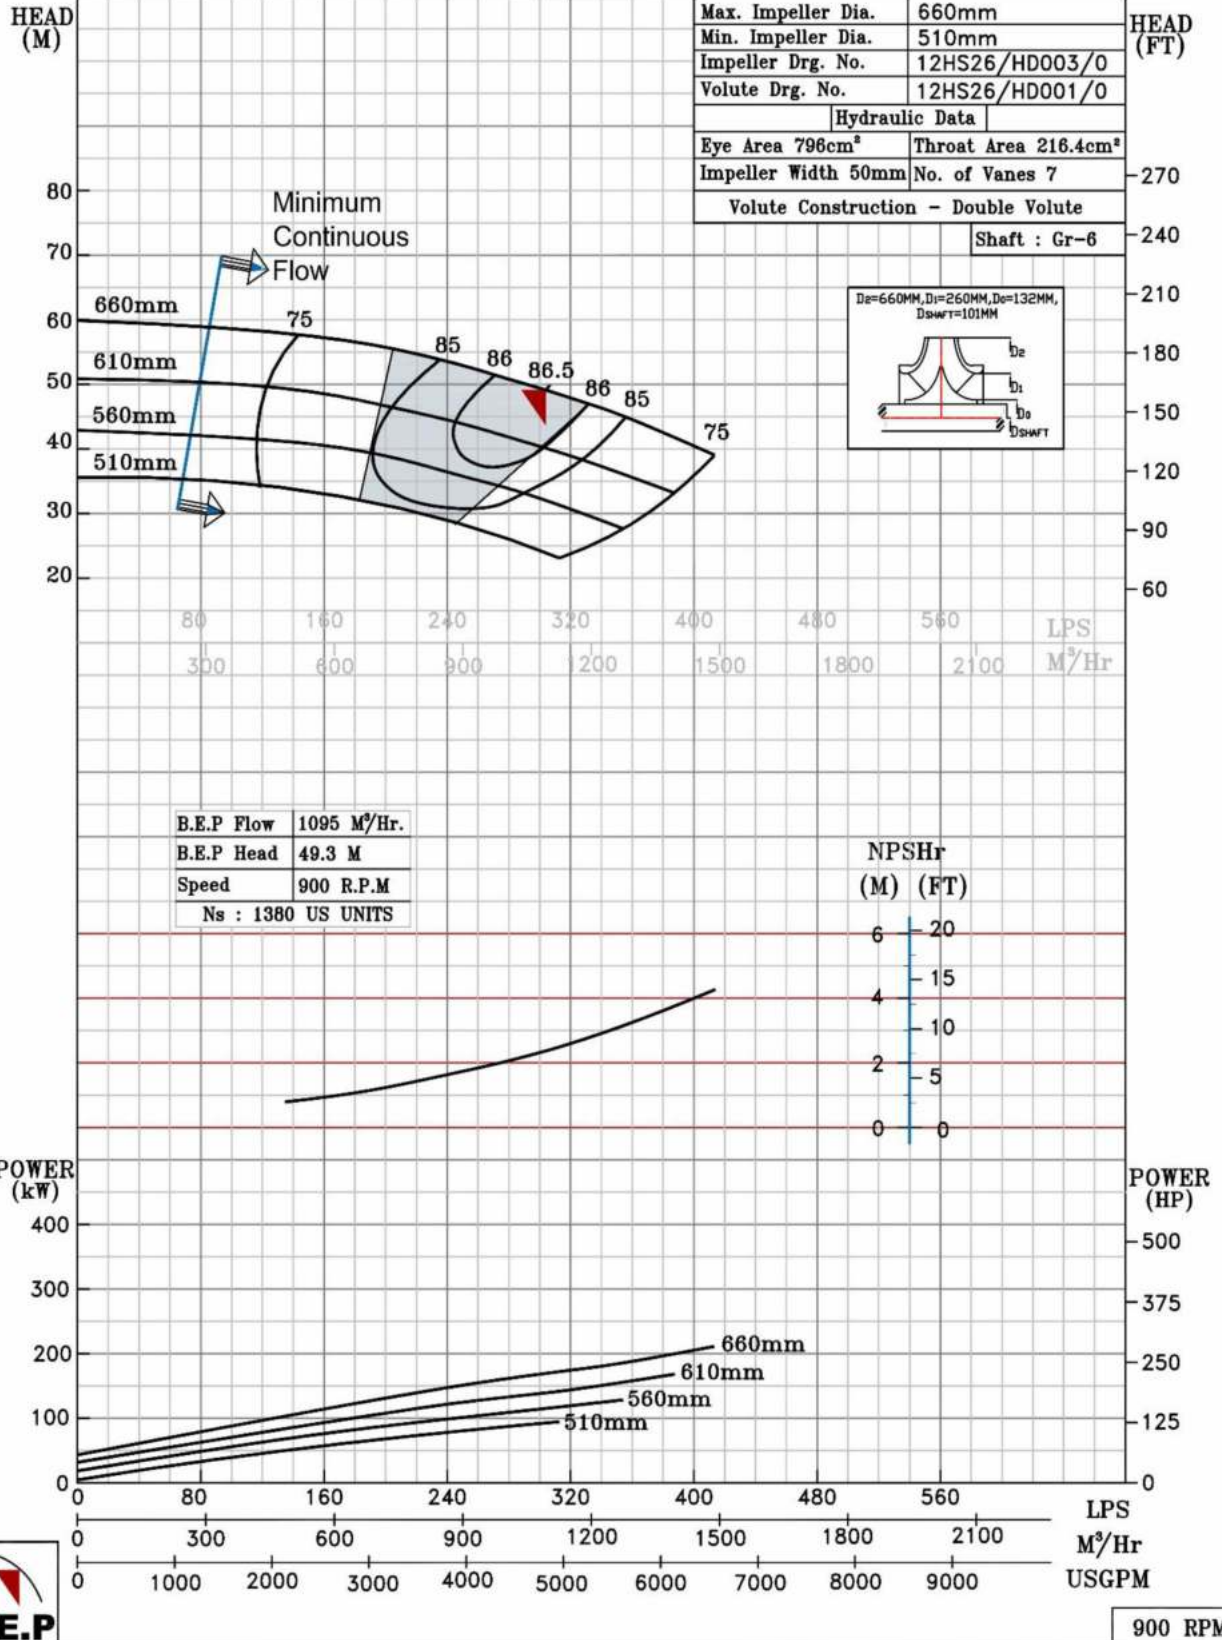

PERFORMANCE CURVE OF 14HS16 @900 R.P.M		NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B
FISHER PUMP	MODEL 14HS16	14HS16/X/104668
	SIZE 400X350-420	WORKING PRESS. 16 bar
	TYPE-AXIALLY SPLIT CASE SINGLE STAGE	TEST PRESS. 24 bar
	HS RANGE	SPEED 900 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE
PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

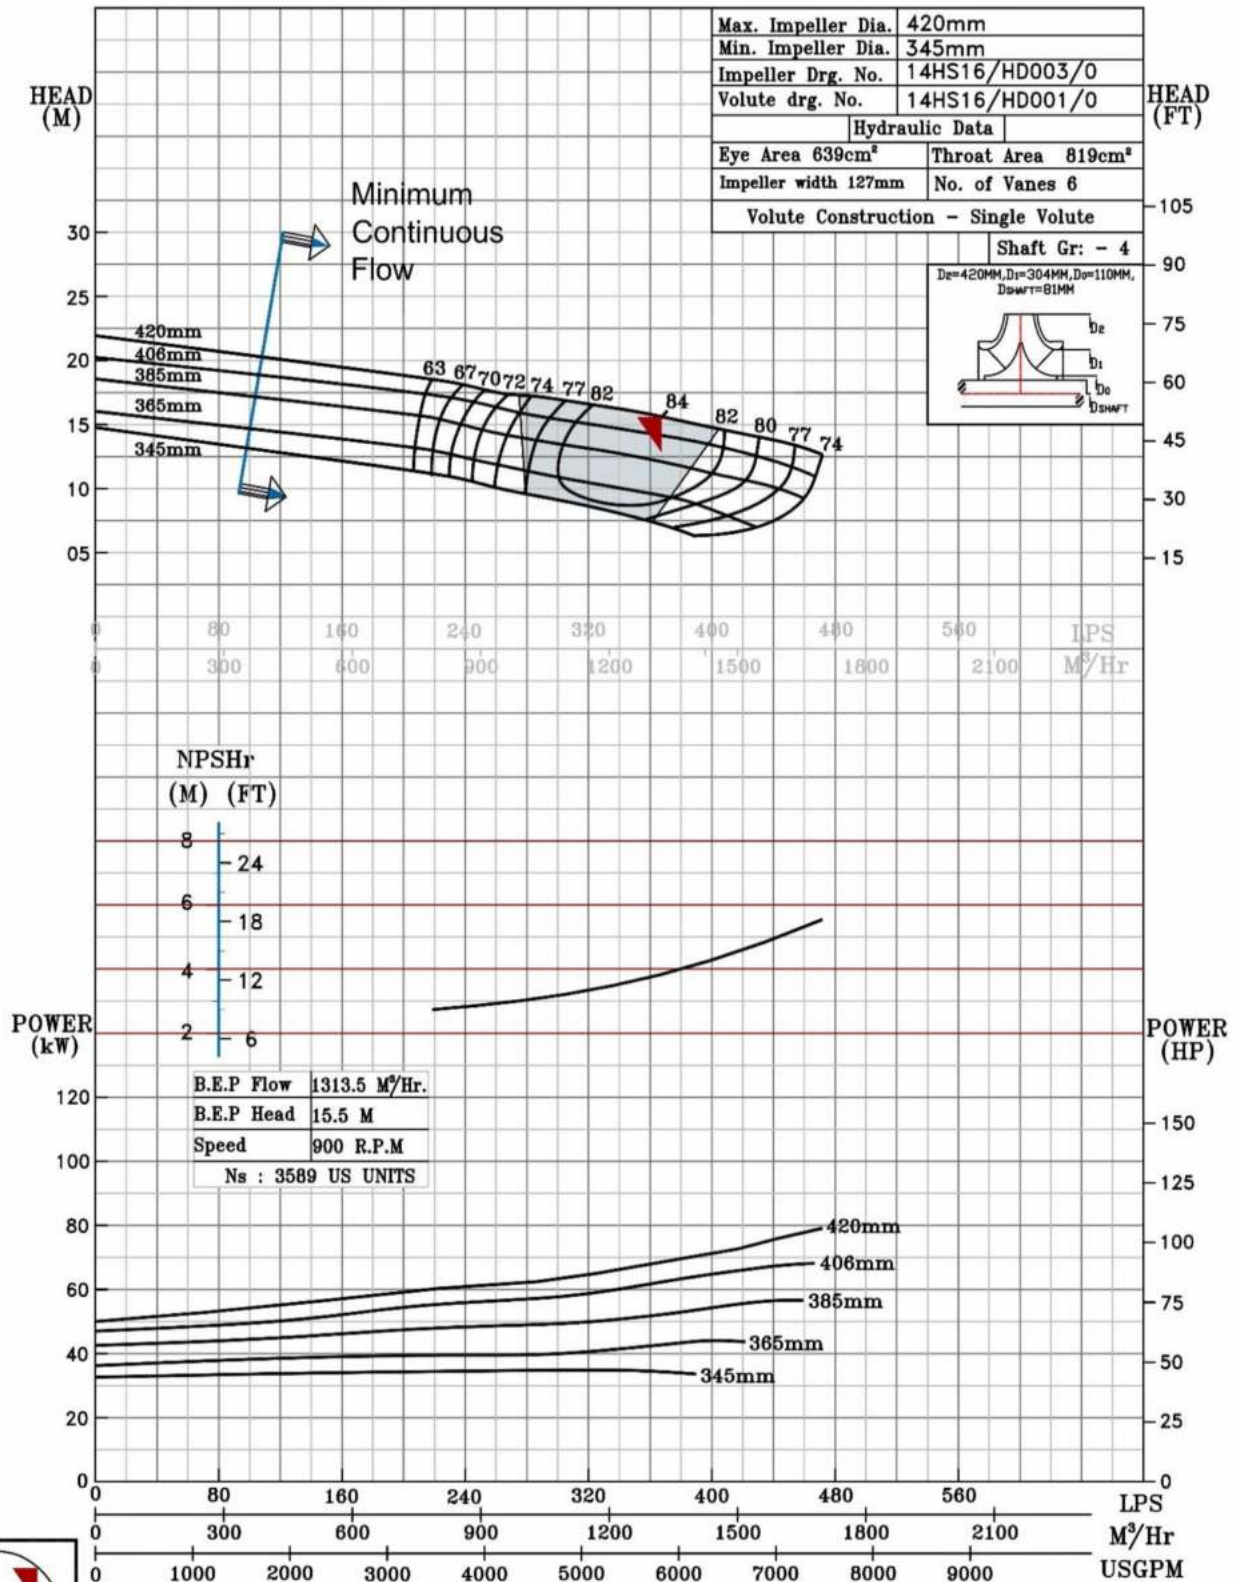

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 14HS19 @900 R.P.M

14HS19/X/104768

FISHER PUMP

HS RANGE

MODEL 14HS19

WORKING PRESS. 20 bar

SIZE 450x350-475


TEST PRESS. 30 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 900 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

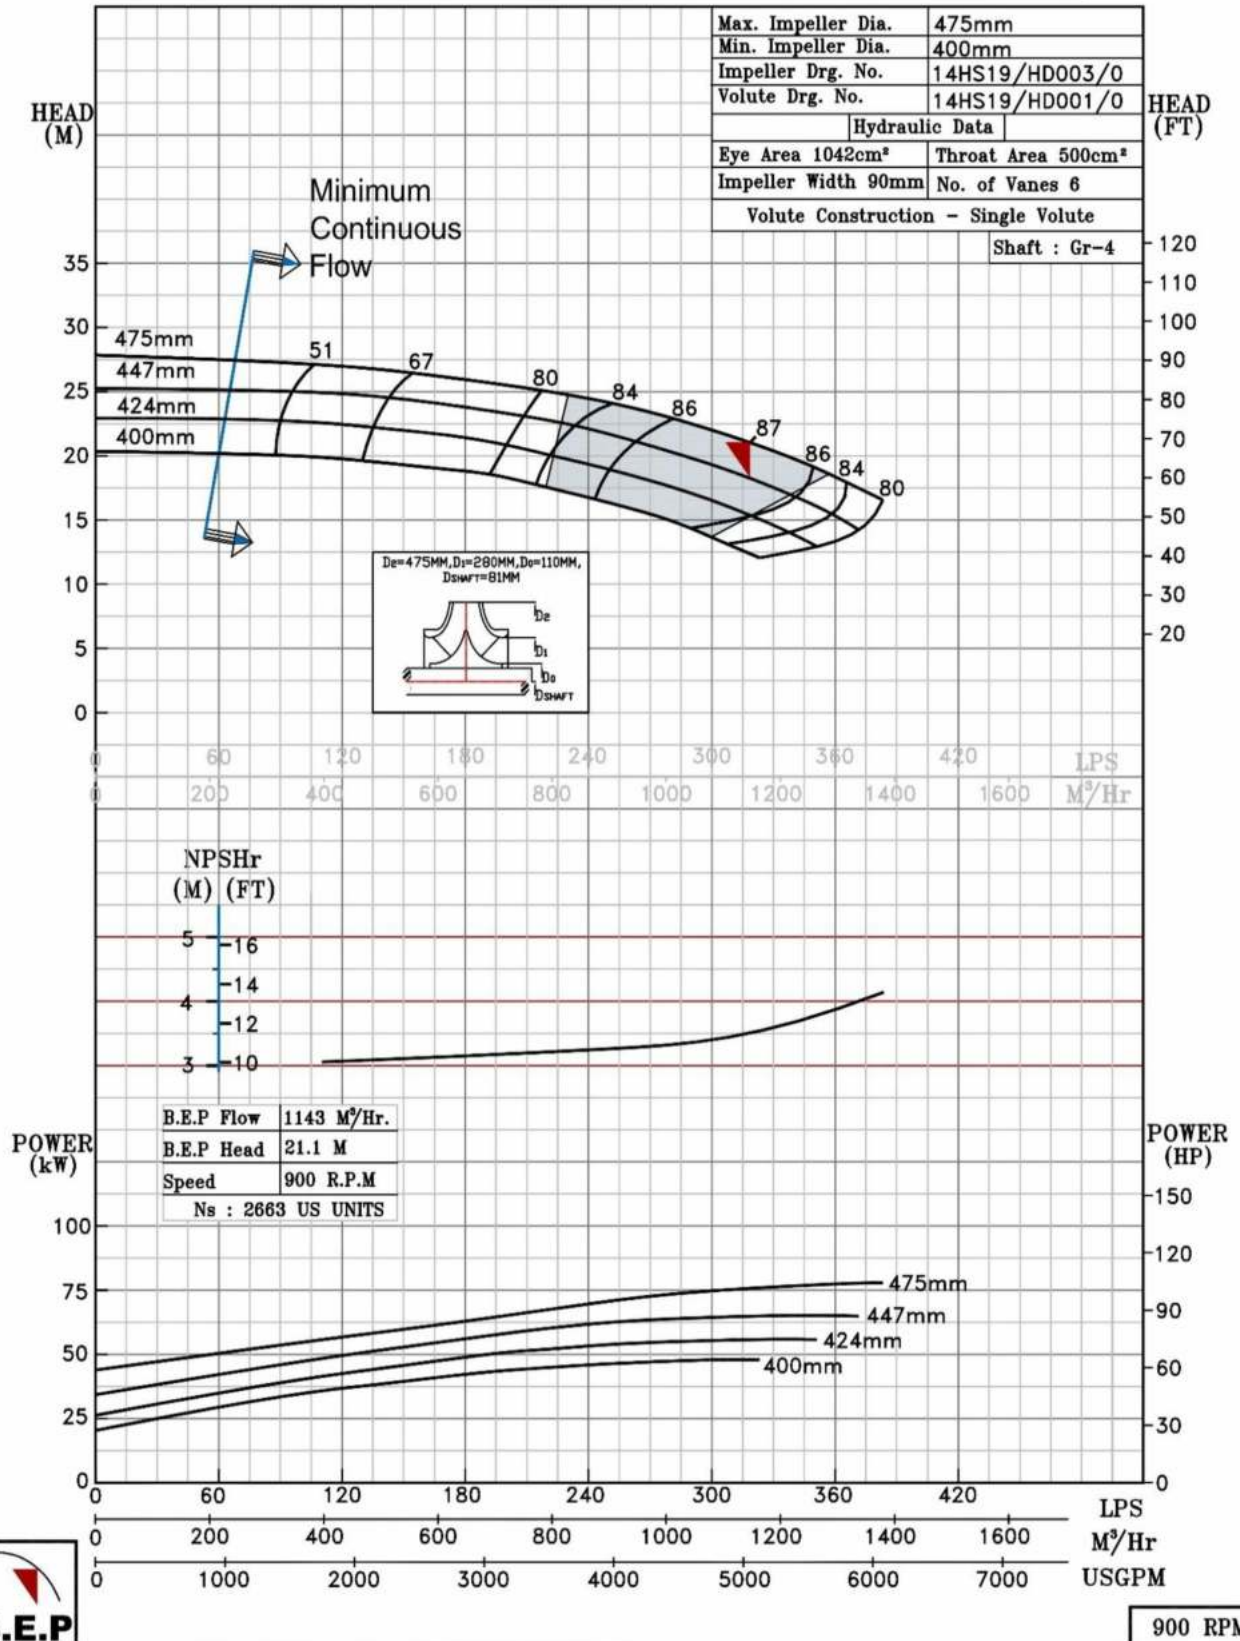

900 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 14HS21 @900 R.P.M

14HS21/X/104868


FISHER PUMP

HS RANGE

MODEL 14HS21	WORKING PRESS	20 bar
SIZE 400x350-550	TEST PRESS.	30 bar
TYPE-AXIALLY SPLIT CASE SINGLE STAGE		
SPEED 900 rpm		

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

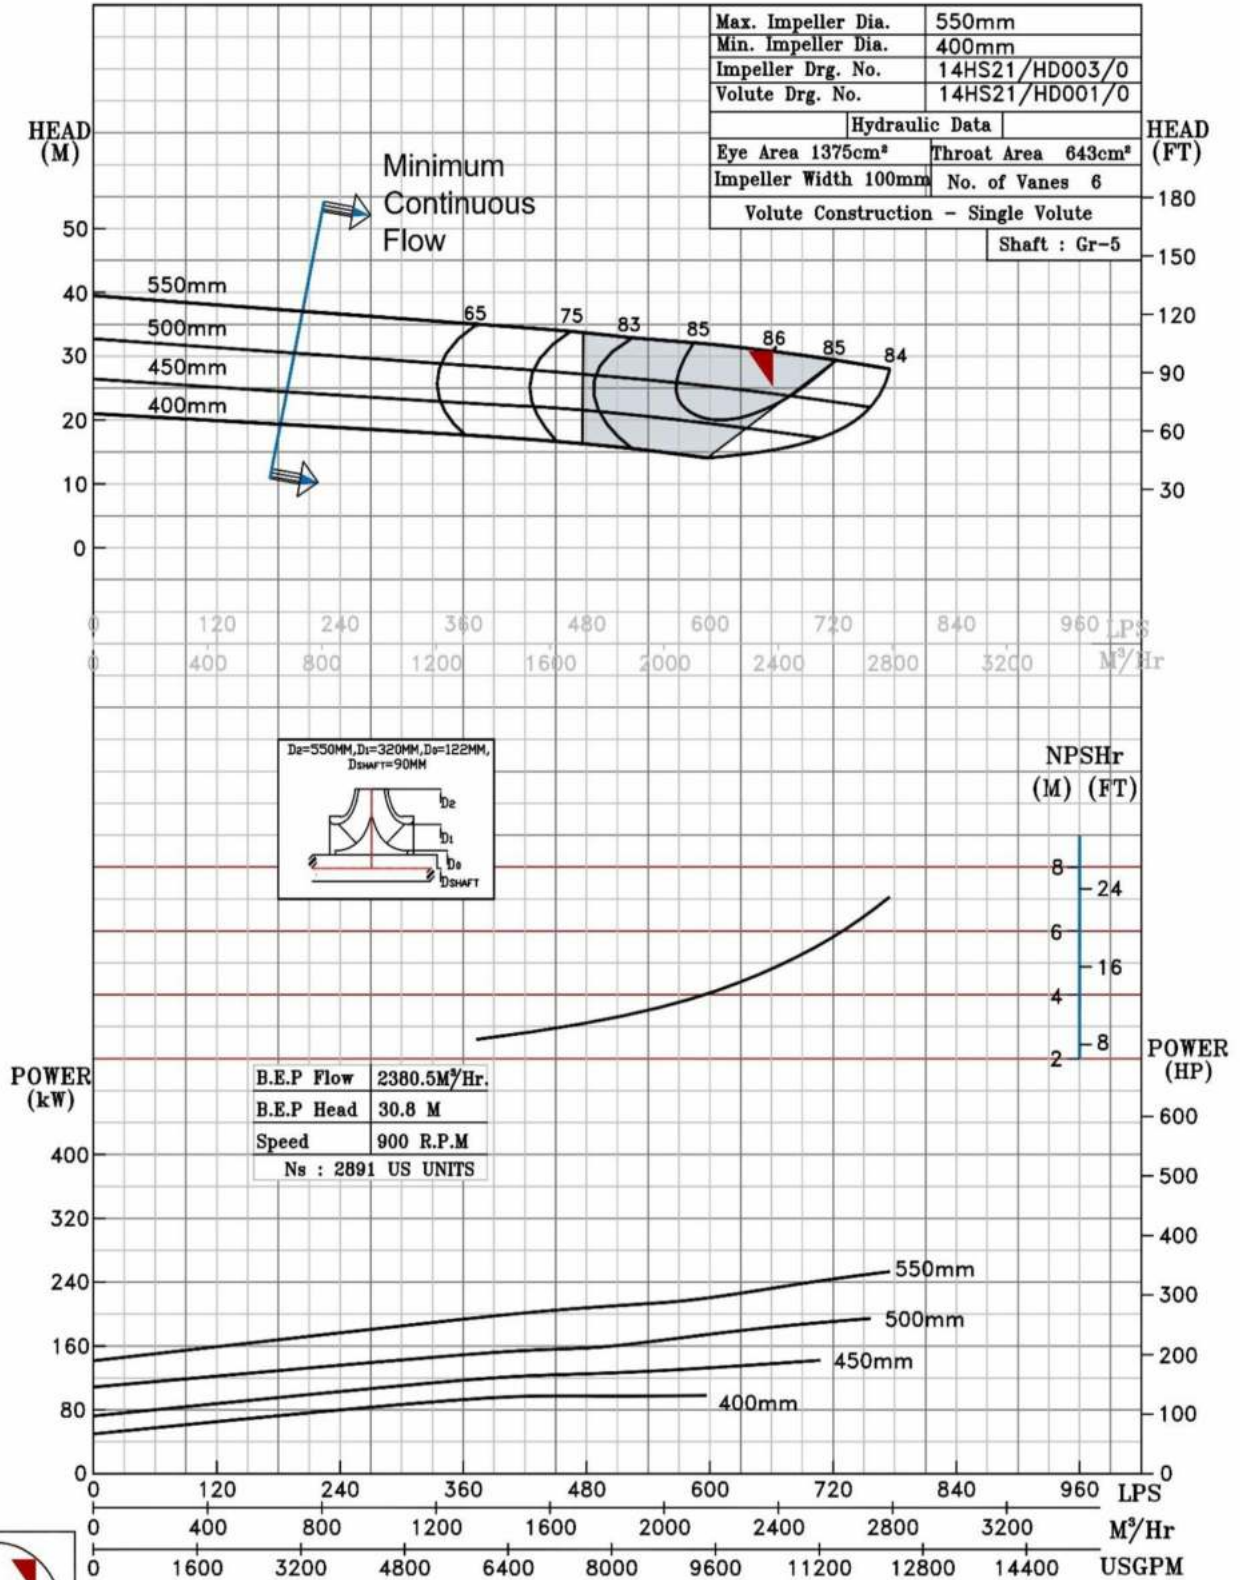

900 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 14HS24 @900 R.P.M

14HS24/X/104968


FISHER PUMP

HS RANGE

MODEL 14HS24	WORKING PRESS.	20 bar
SIZE 400x350-610	TEST PRESS.	30 bar
TYPE-AXIALLY SPLIT CASE SINGLE STAGE		
SPEED 900 rpm		

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

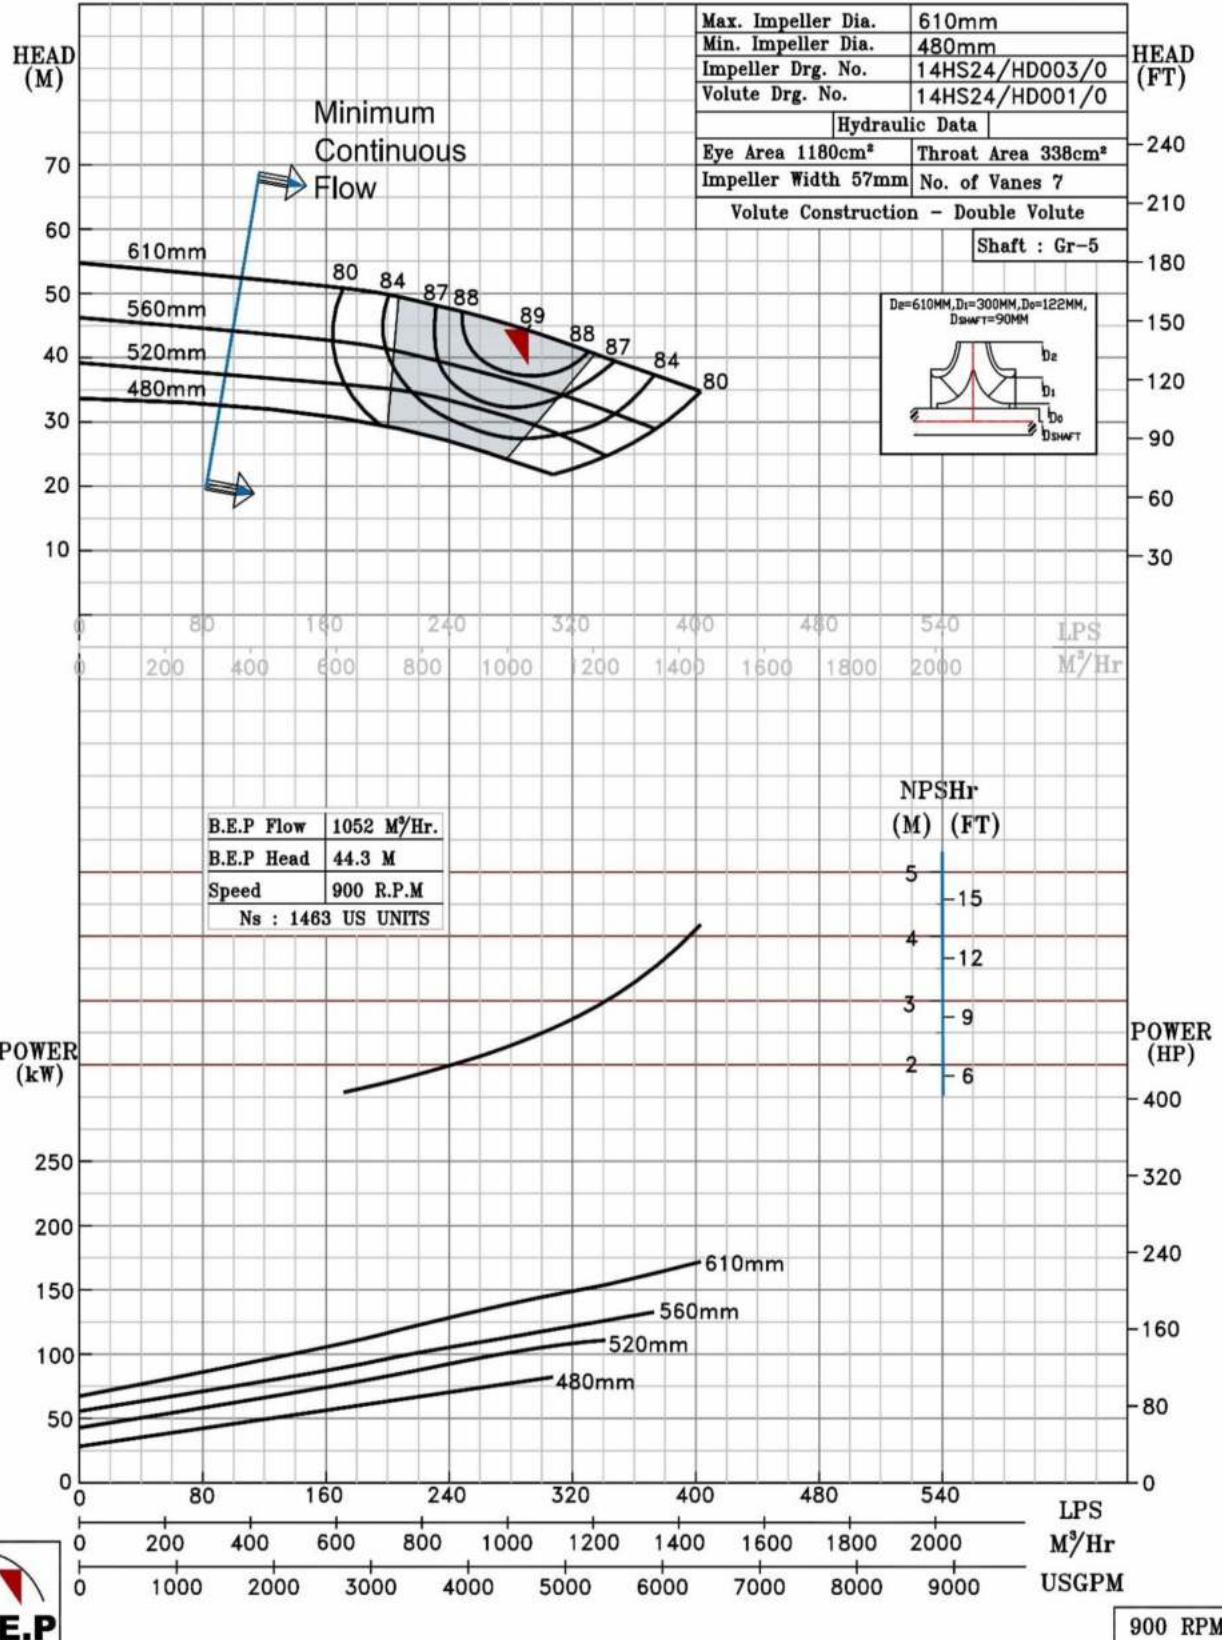

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 14HS25 @900 R.P.M

14HS25/X/105068

FISHER PUMP

HS RANGE

MODEL 14HS25

WORKING PRESS. 20 bar

SIZE 400x350-640


TEST PRESS. 30 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 900 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

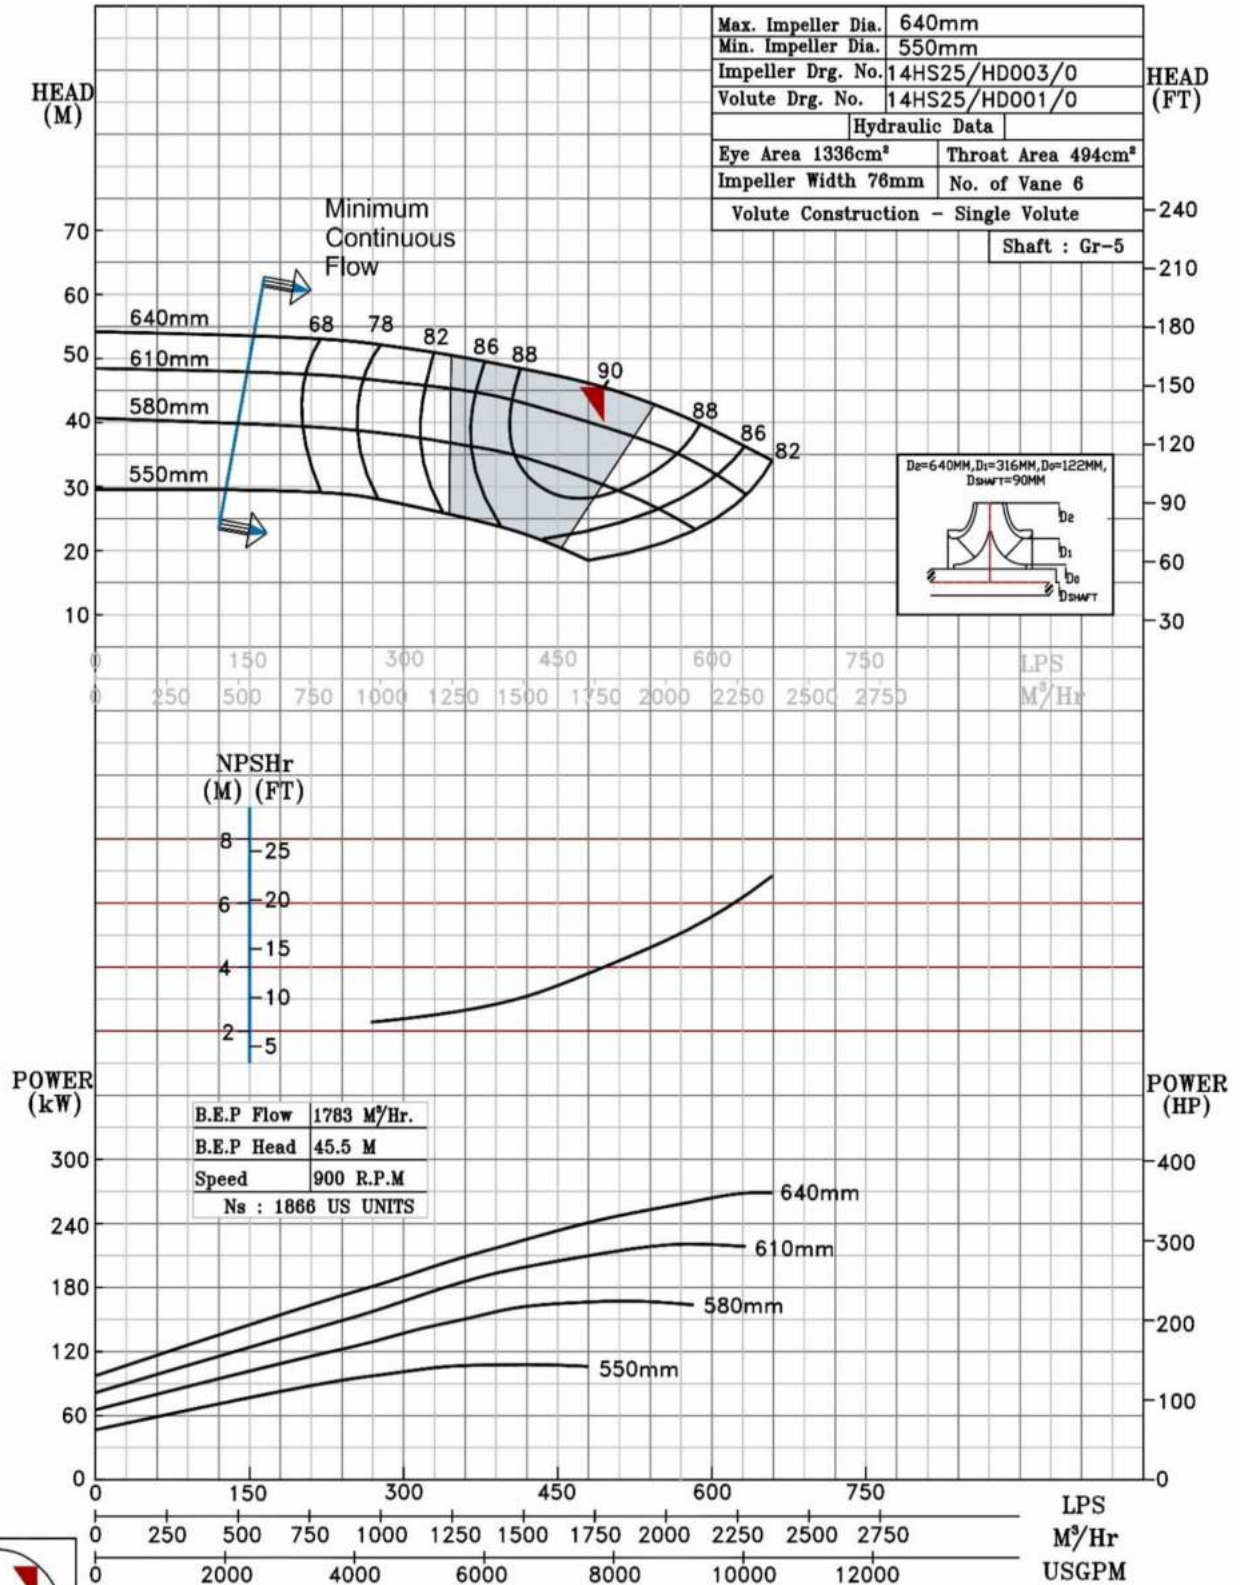

900 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 14HS26 @900 R.P.M

14HS26/X/105168

FISHER PUMP

HS RANGE

MODEL 14HS26

WORKING PRESS. 14 bar

SIZE 400x350-642


TEST PRESS. 21 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 900 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

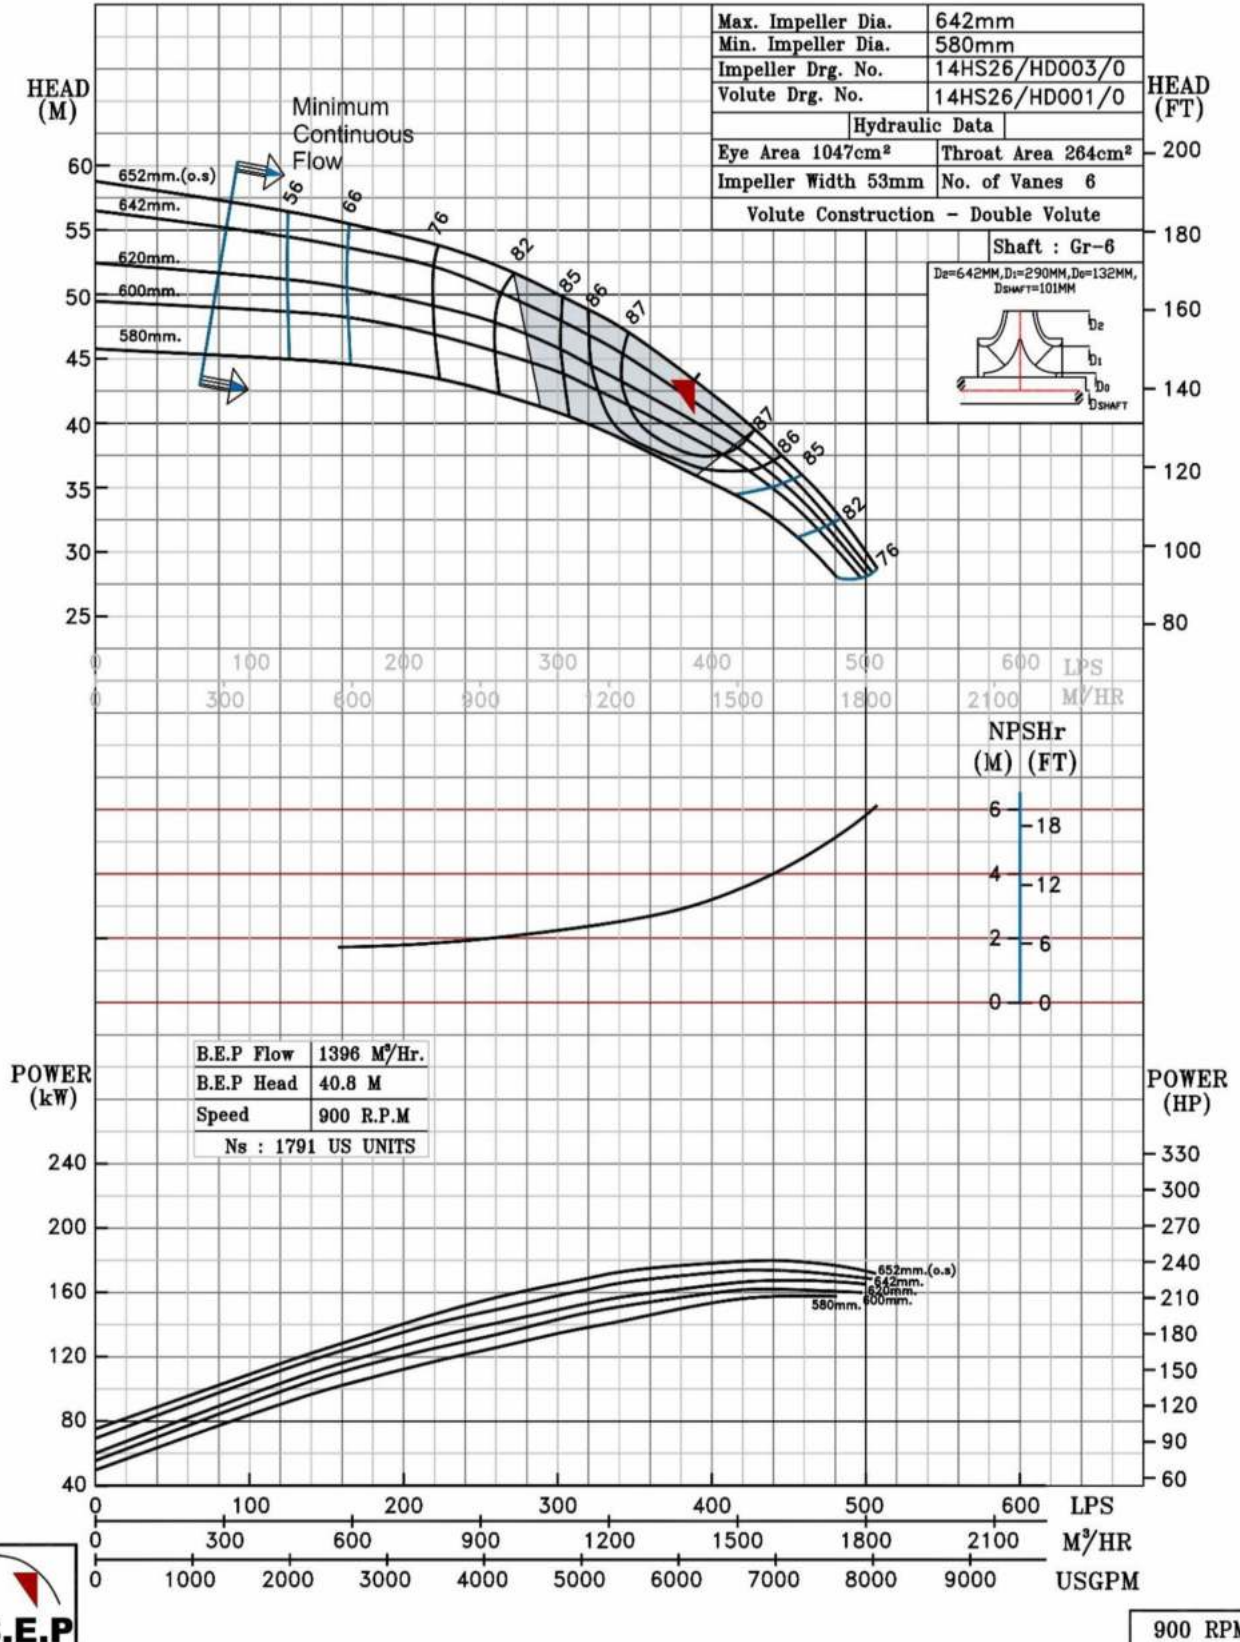

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 14HS28 @900 R.P.M

14HS28/X/105268


FISHER PUMP

HS RANGE

MODEL 14HS28	WORKING PRESS.	16 bar
SIZE 450x350-710	TEST PRESS.	24 bar
TYPE-AXIALLY SPLIT CASE SINGLE STAGE		
SPEED 900 rpm		

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

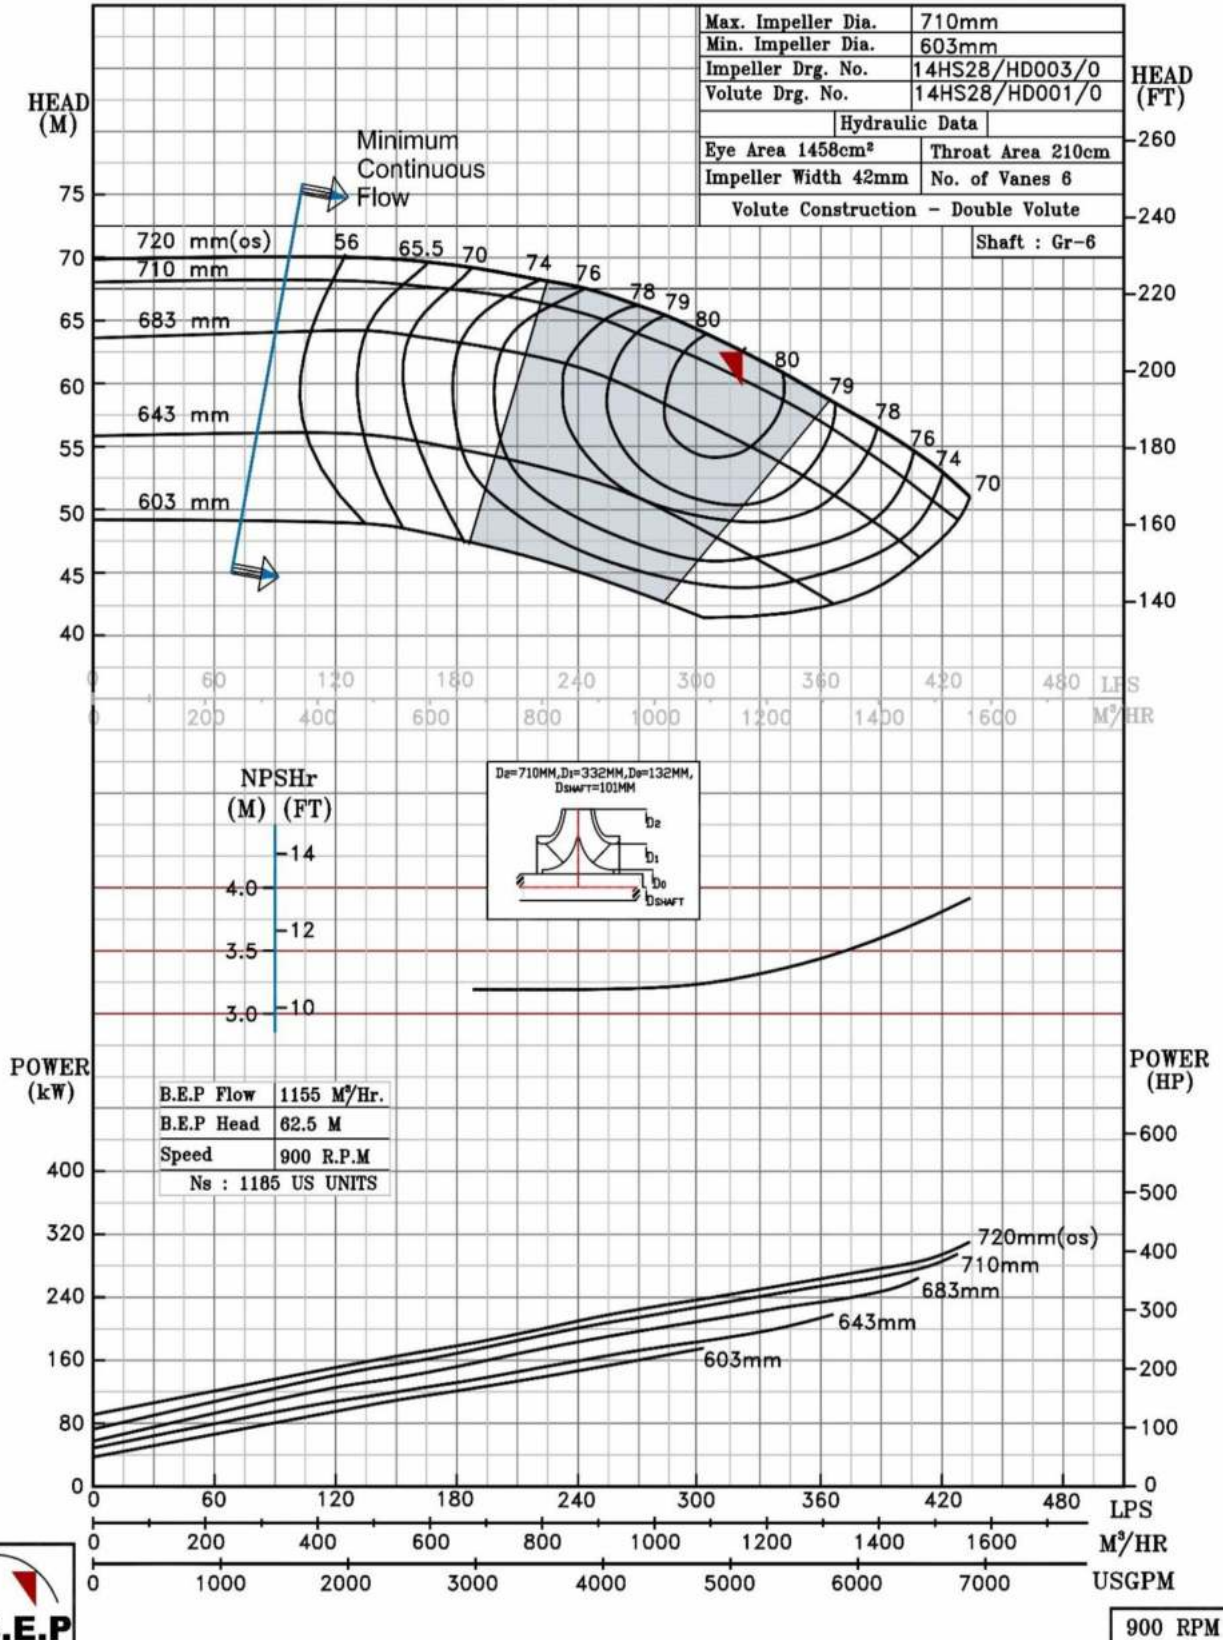

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 14HS30 @900 R.P.M

14HS30/X/105368

FISHER PUMP

HS RANGE

MODEL 14HS30

WORKING PRESS. 20 bar

SIZE 450x350-770


TEST PRESS. 30 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 900 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

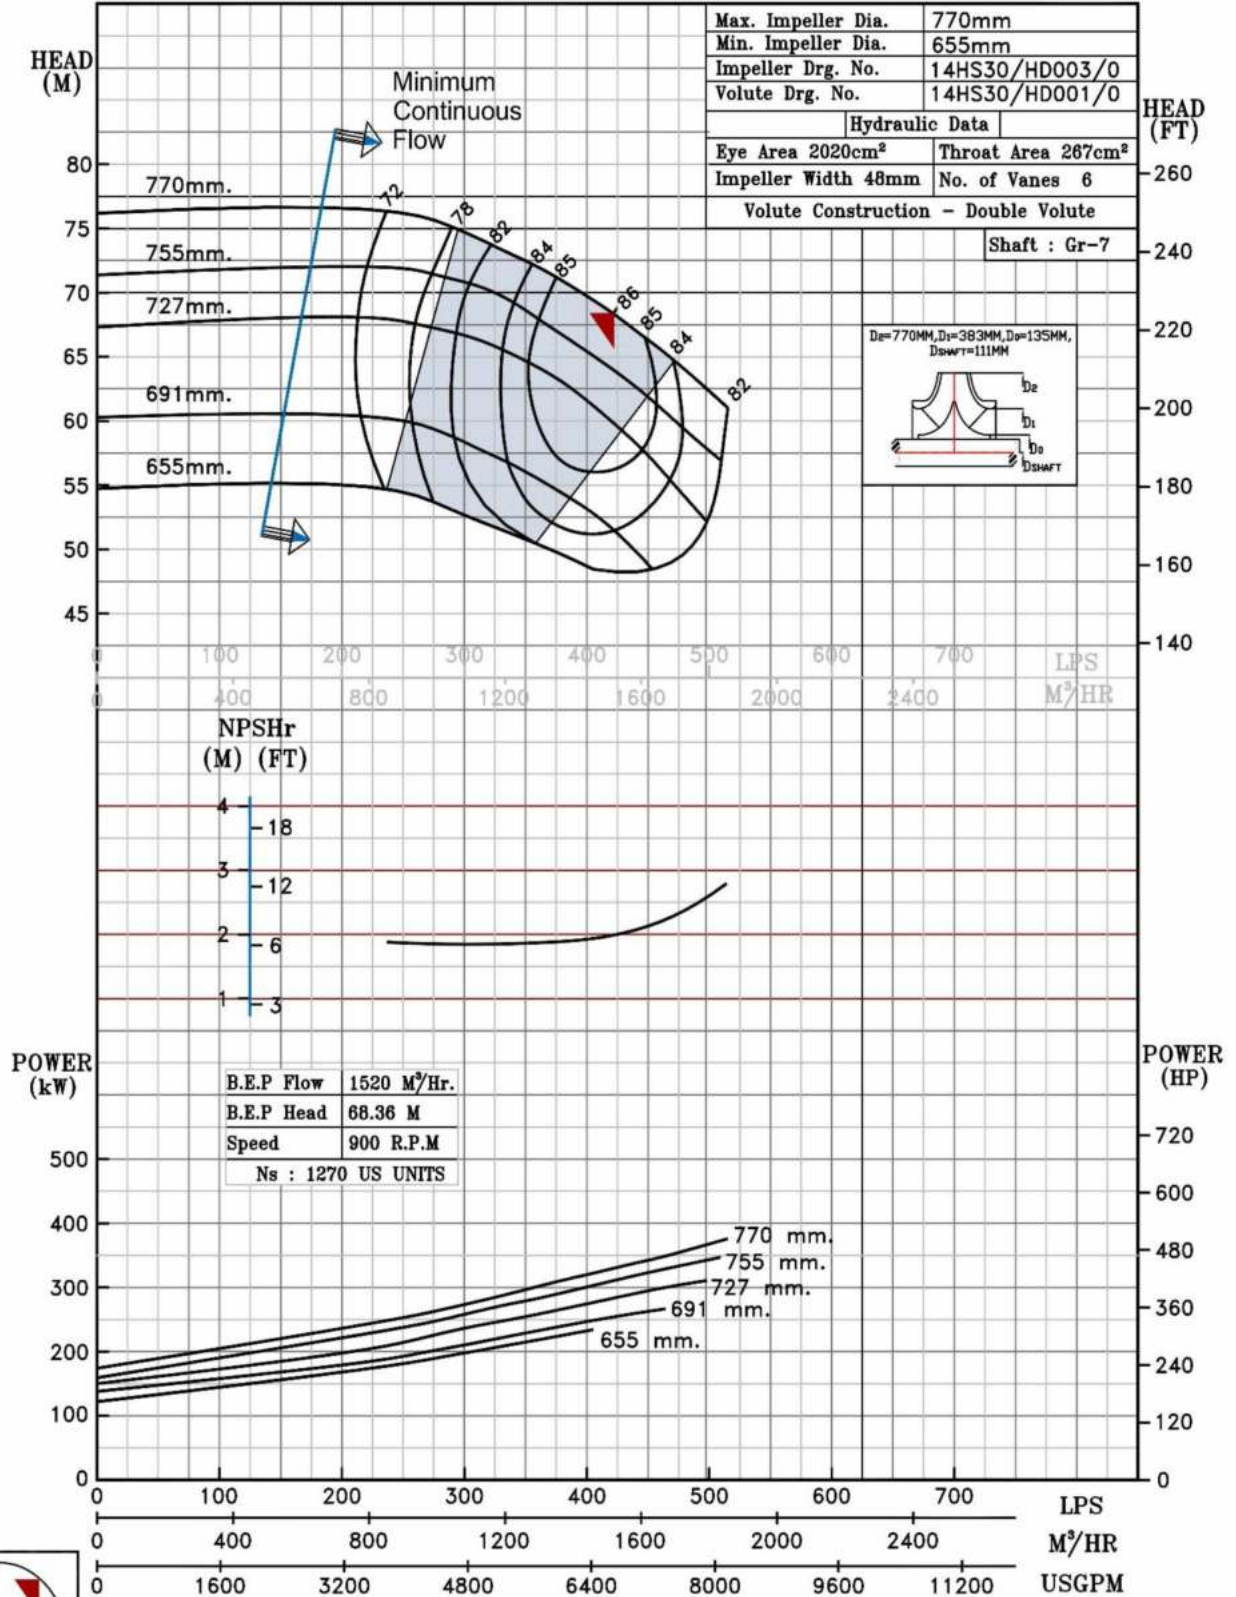

B.E.P Flow	1520 M ³ /Hr.
B.E.P Head	68.36 M
Speed	900 R.P.M
Ns	1270 US UNITS



900 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 16HS21 @900 R.P.M

16HS21/X/105468

FISHER PUMP

HS RANGE

MODEL 16HS21

WORKING PRESS. 16 bar

SIZE 500x400-540


TEST PRESS. 24 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 900 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE


PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

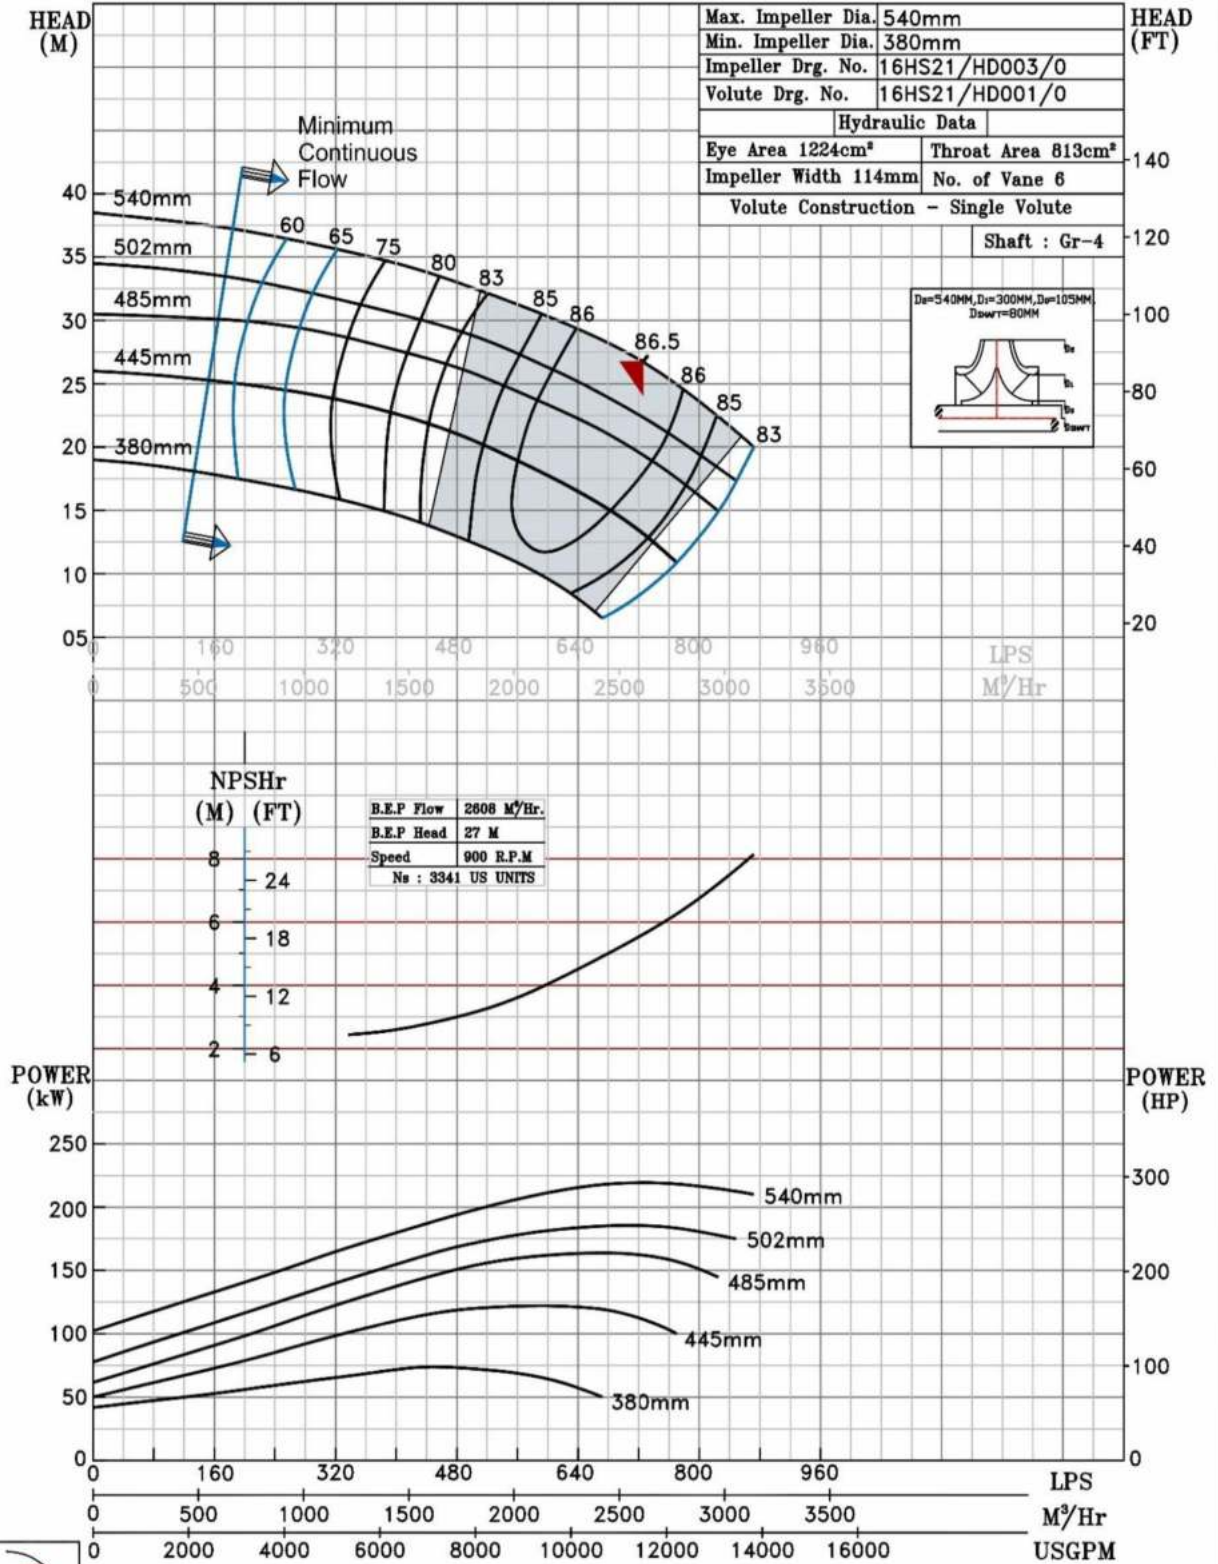

900 RPM

PERFORMANCE CURVE OF 16HS21H @880 R.P.M		NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B
FISHER PUMP	MODEL 16HS21H	16HS21H/X/105568
	SIZE 500x400-540	WORKING PRESS. 16 bar
	TYPE-AXIALY SPLIT CASE SINGLE STAGE	TEST PRESS. 24 bar
	HS RANGE	SPEED 880 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE
PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

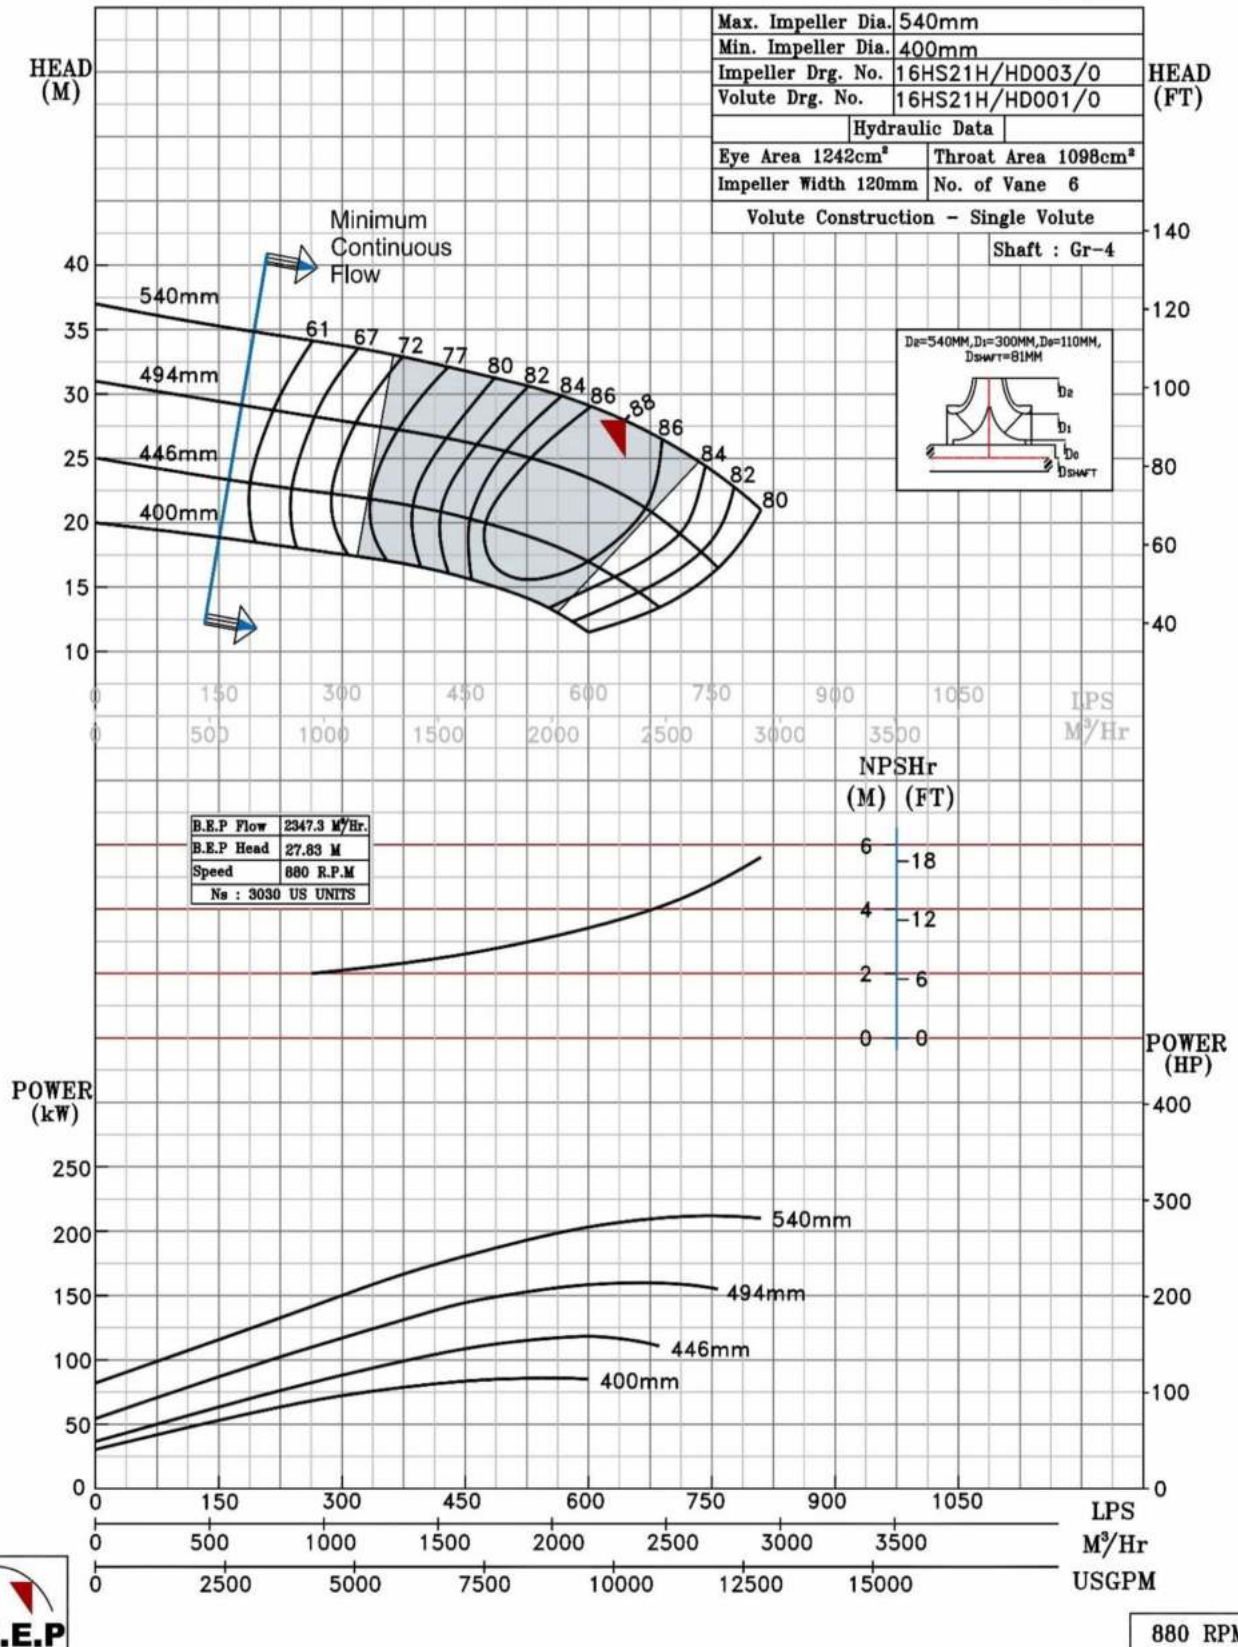

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 16HS21L @880 R.P.M

16HS21L/X/105668


FISHER PUMP

HS RANGE

MODEL 16HS21L	WORKING PRESS. 16 bar
SIZE 500x400-540	TEST PRESS. 24 bar
TYPE-AXIALLY SPLIT CASE SINGLE STAGE	
SPEED 880 rpm	

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

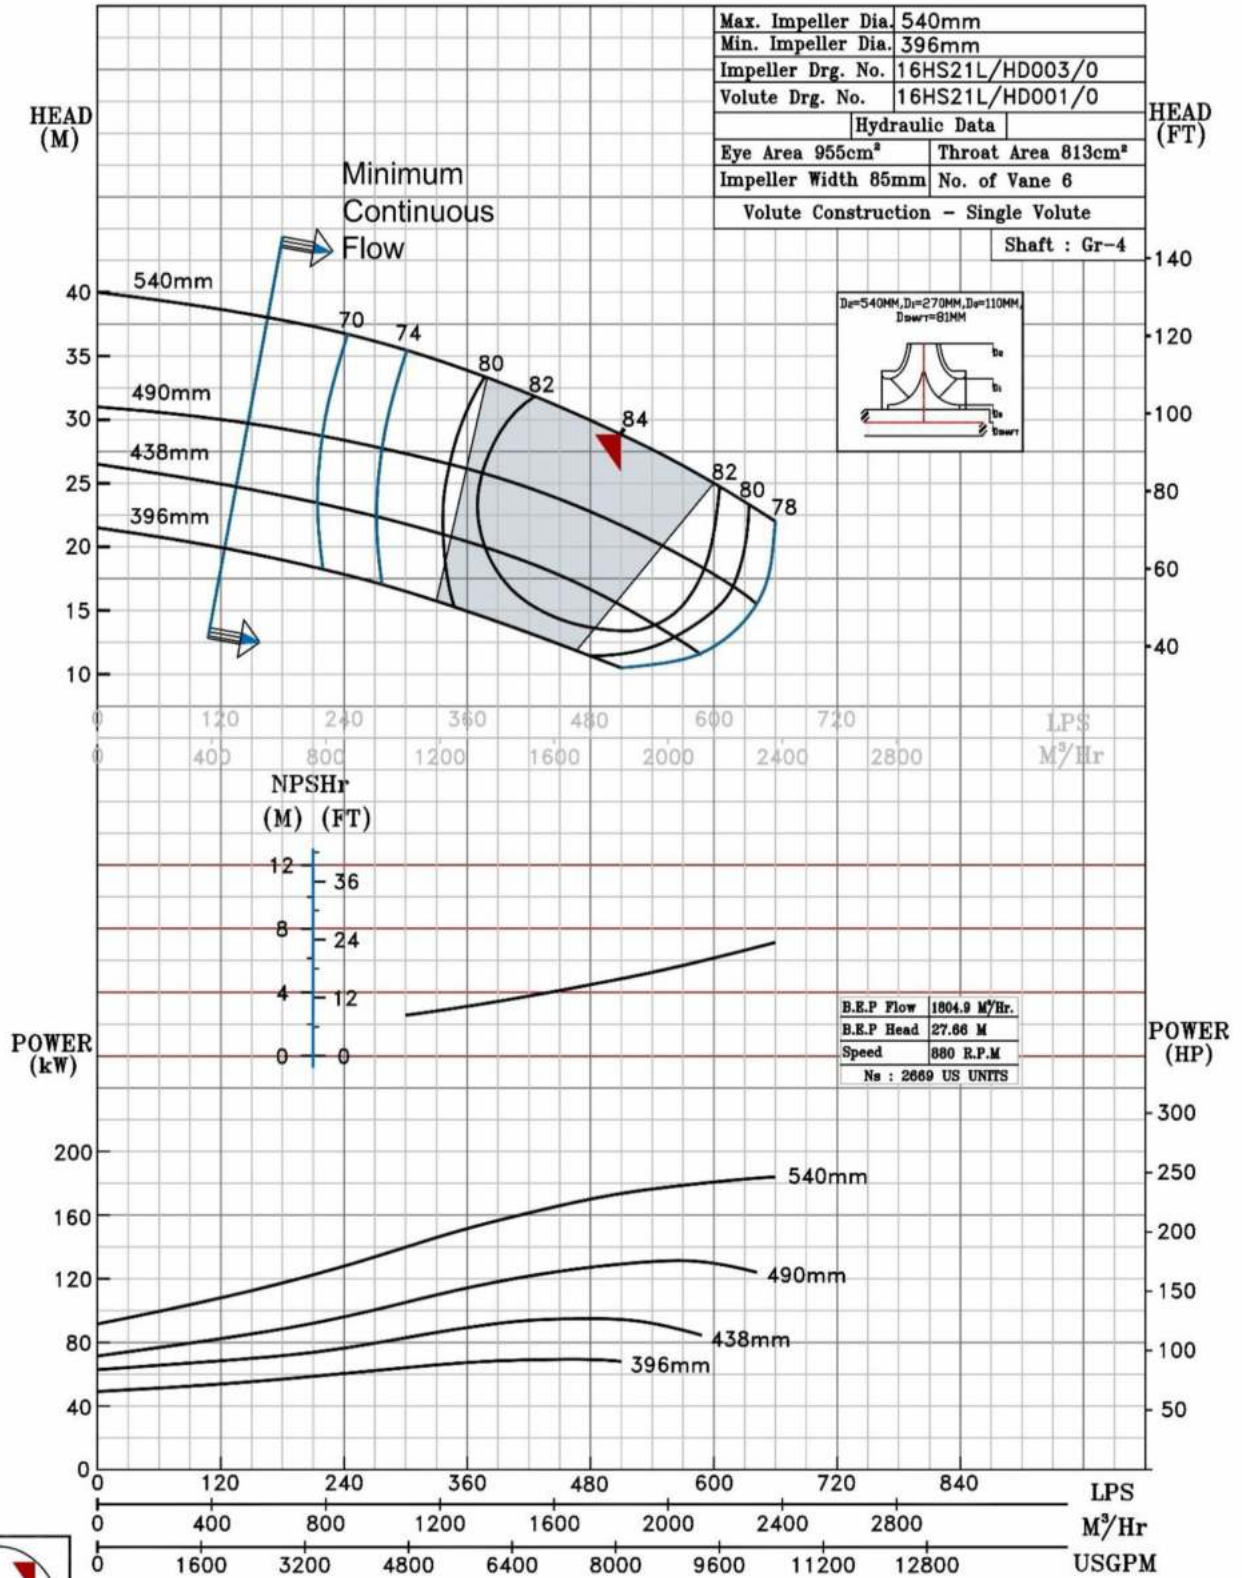


880 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 16HS26 @900 R.P.M		16HS26/X/105768	
FISHER PUMP	<i>HS RANGE</i>	MODEL 16HS26	WORKING PRESS. 16 bar
		SIZE 500x400-662	TEST PRESS. 24 bar
		TYPE-AXIALLY SPLIT CASE SINGLE STAGE	
		SPEED 900 rpm	

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

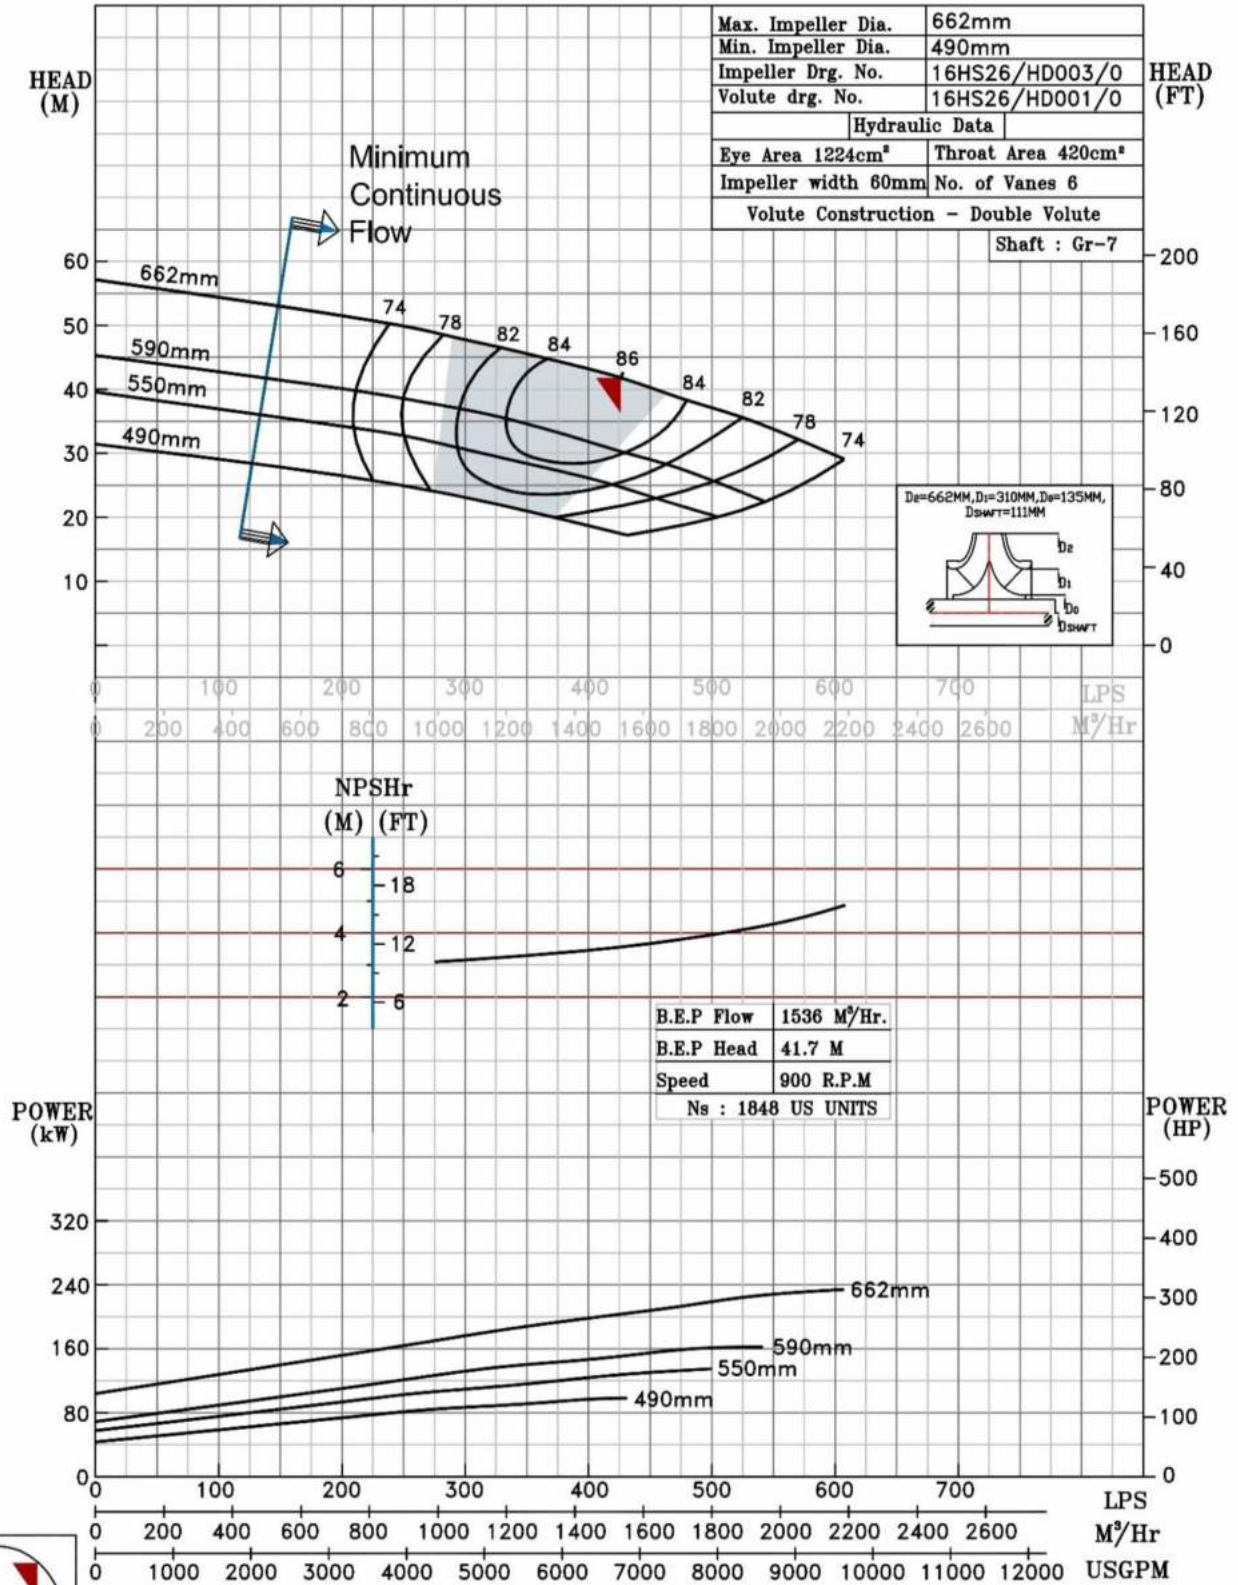


900 RPM

PERFORMANCE CURVE OF 16HS28 @900 R.P.M		16HS28/X/105868
FISHER PUMP HS RANGE	MODEL 16HS28	WORKING PRESS. 16 bar
	SIZE 450x400-700	TEST PRESS. 24 bar
	TYPE-AXIALLY SPLIT CASE SINGLE STAGE	
		SPEED 900 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G. 1.0

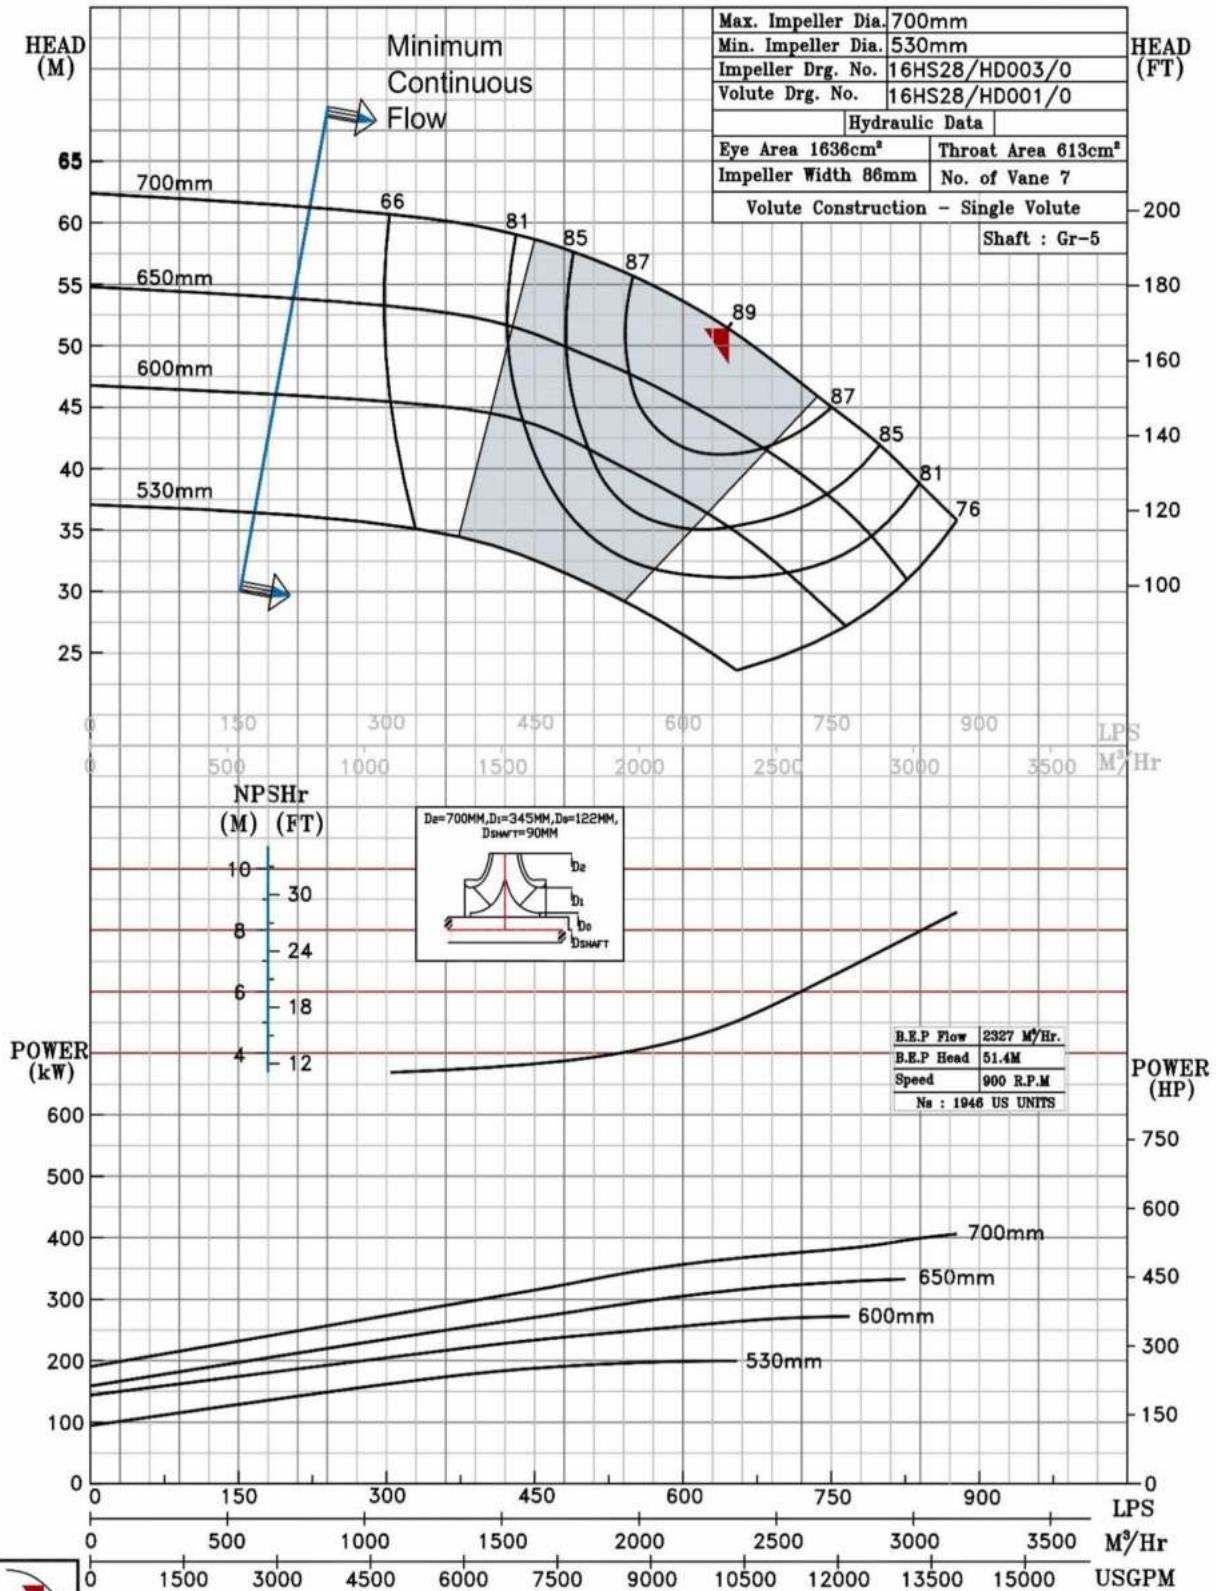

900 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 16HS32 @900 R.P.M

16HS32/X/105968

FISHER PUMP

HS RANGE

MODEL 16HS32

WORKING PRESS. 16 bar

SIZE 500x400-813


TEST PRESS. 24 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 900 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

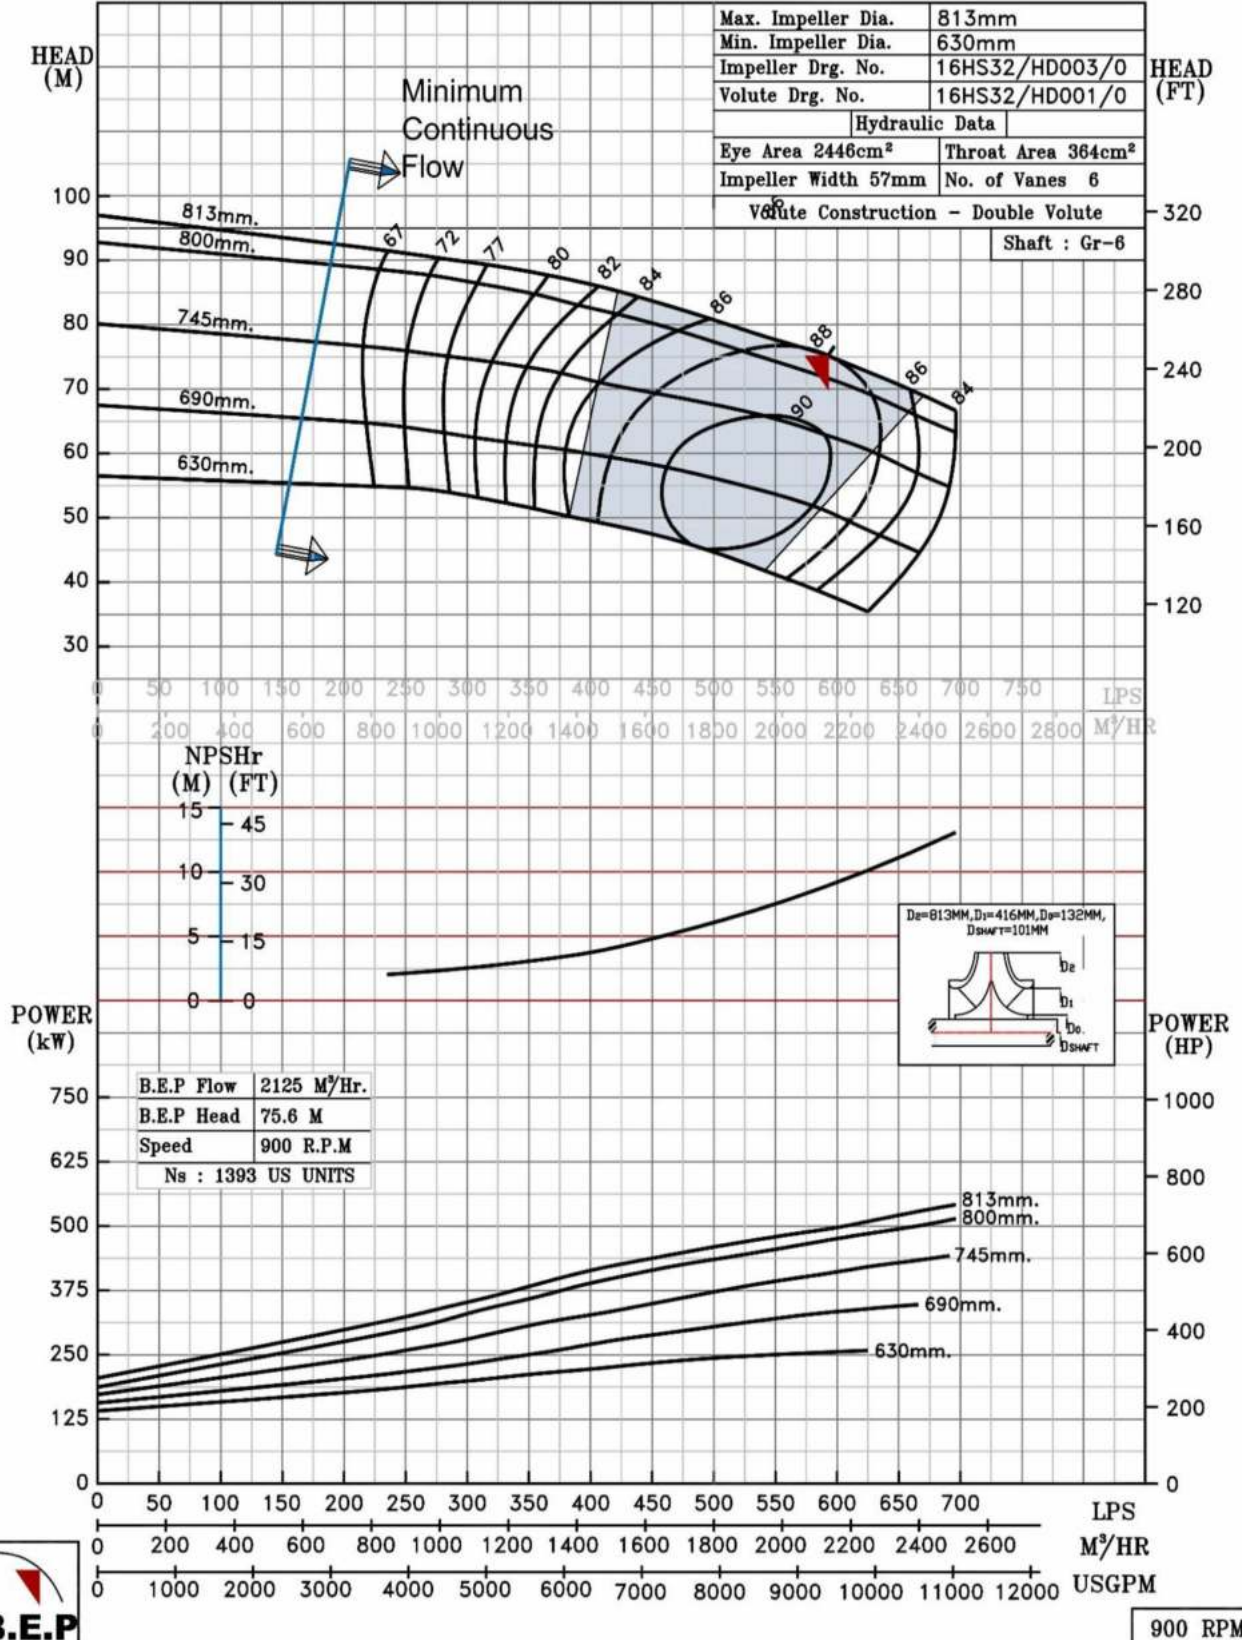

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 18HS21 @900 R.P.M

18HS21/X/106068

FISHER PUMP

HS RANGE

MODEL 18HS21

WORKING PRESS. 10 bar

SIZE 500x450-530


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 900 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

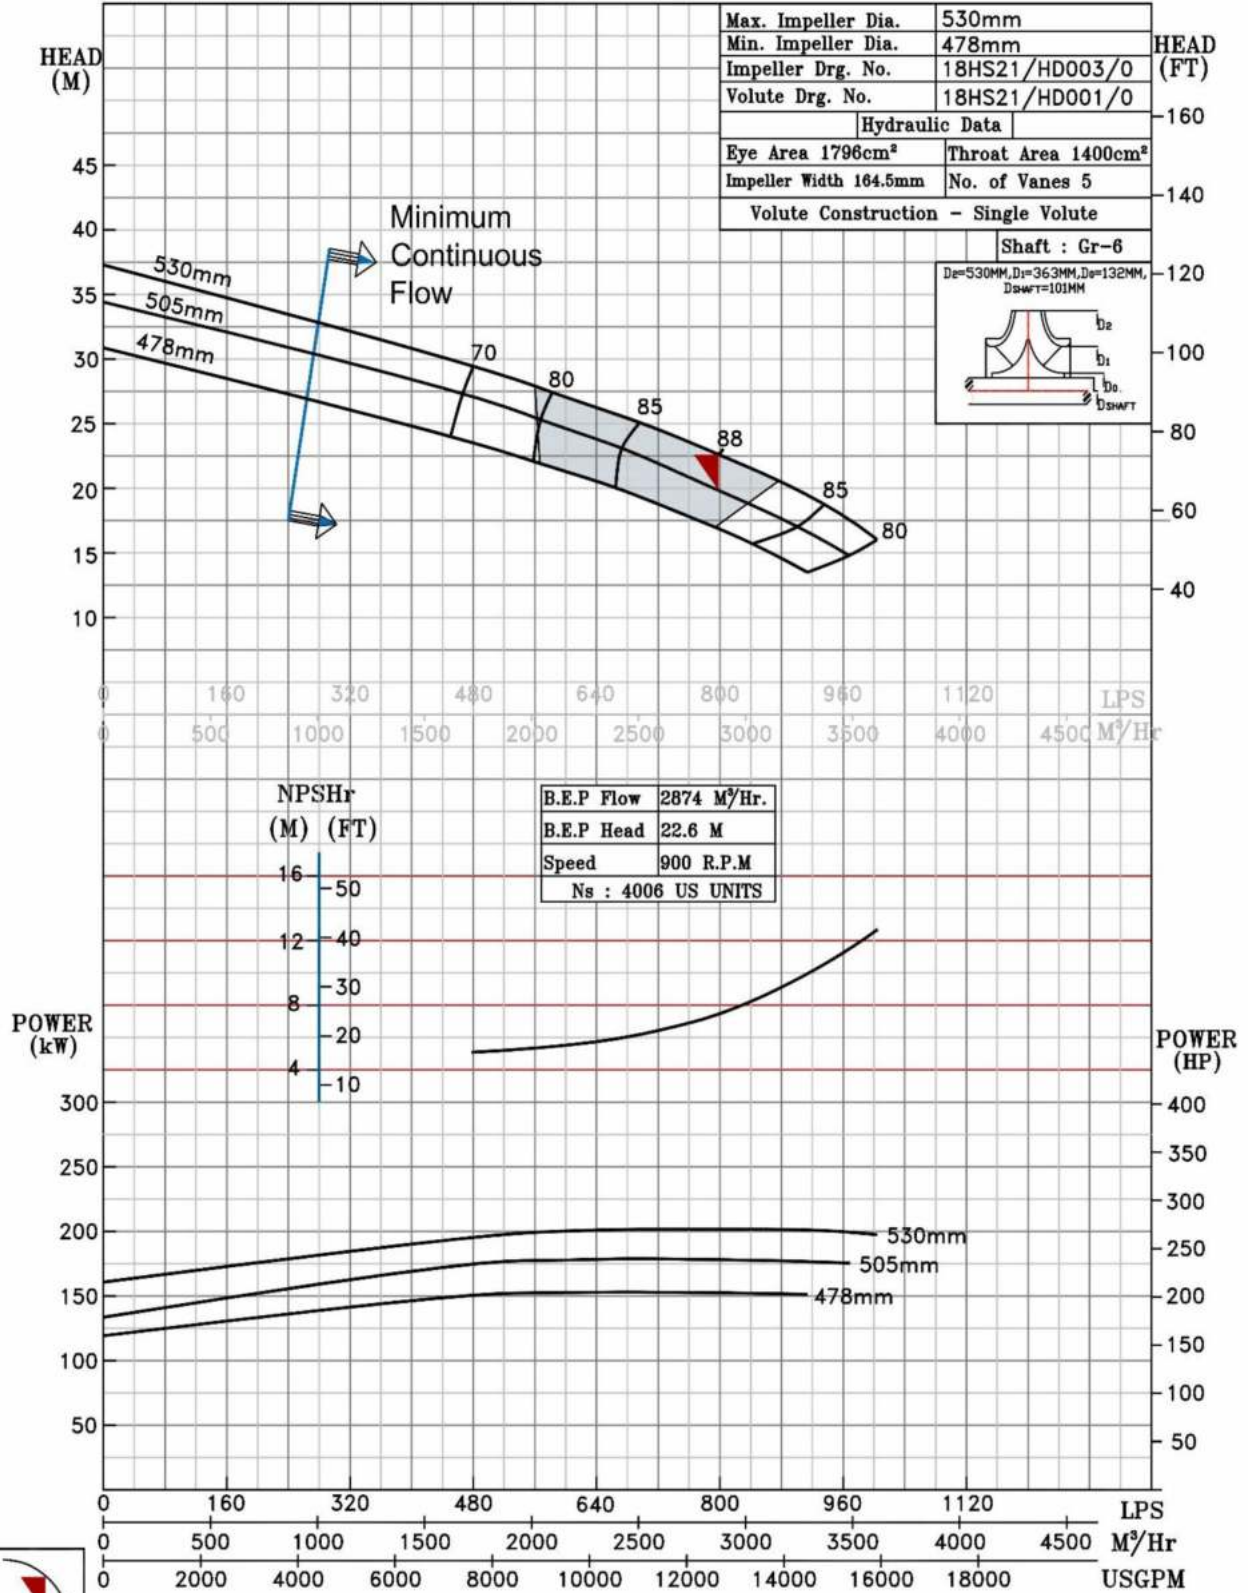

900 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 18HS25 @900 R.P.M

18HS25/X/106168

FISHER PUMP

HS RANGE

MODEL 18HS25

WORKING PRESS. 10 bar

SIZE 500x450-632


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 900 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

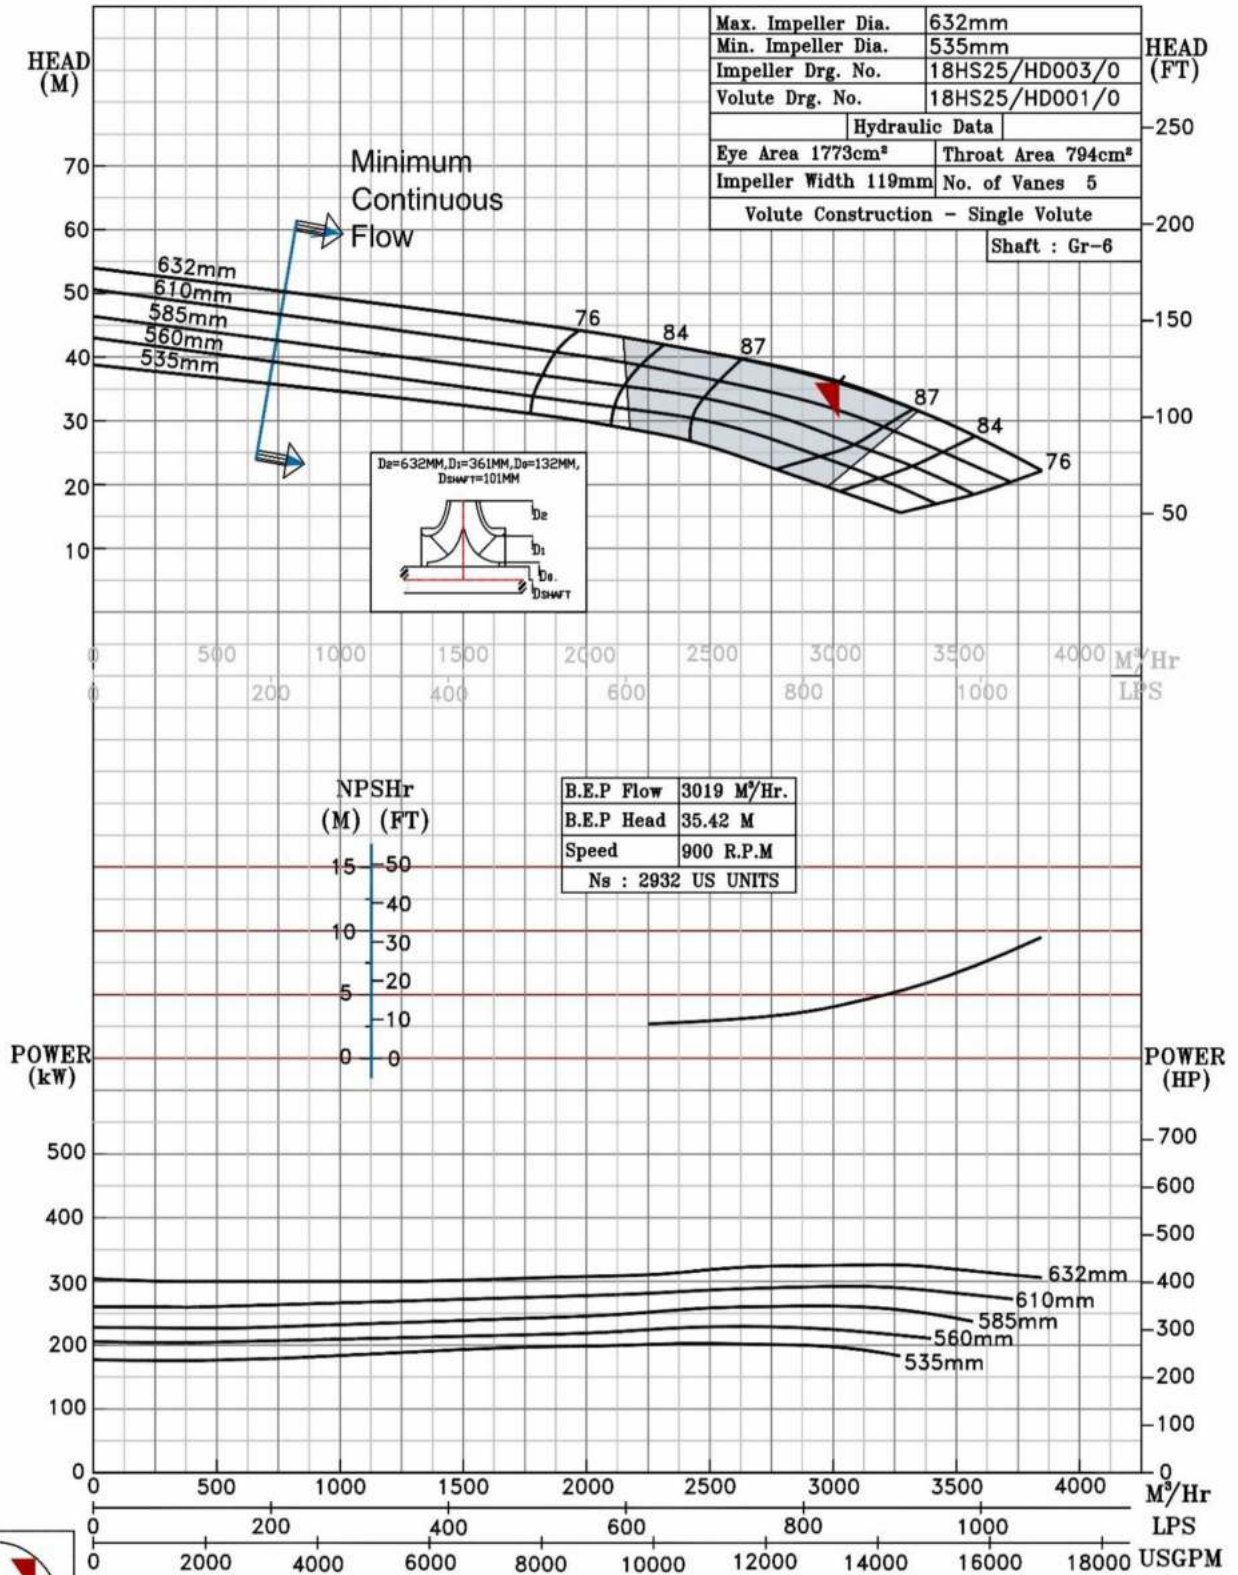

900 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 18HS30 @900 R.P.M

18HS30/X/106268

FISHER PUMP

HS RANGE

MODEL 18HS30

WORKING PRESS. 10 bar

SIZE 500x450-750


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 900 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

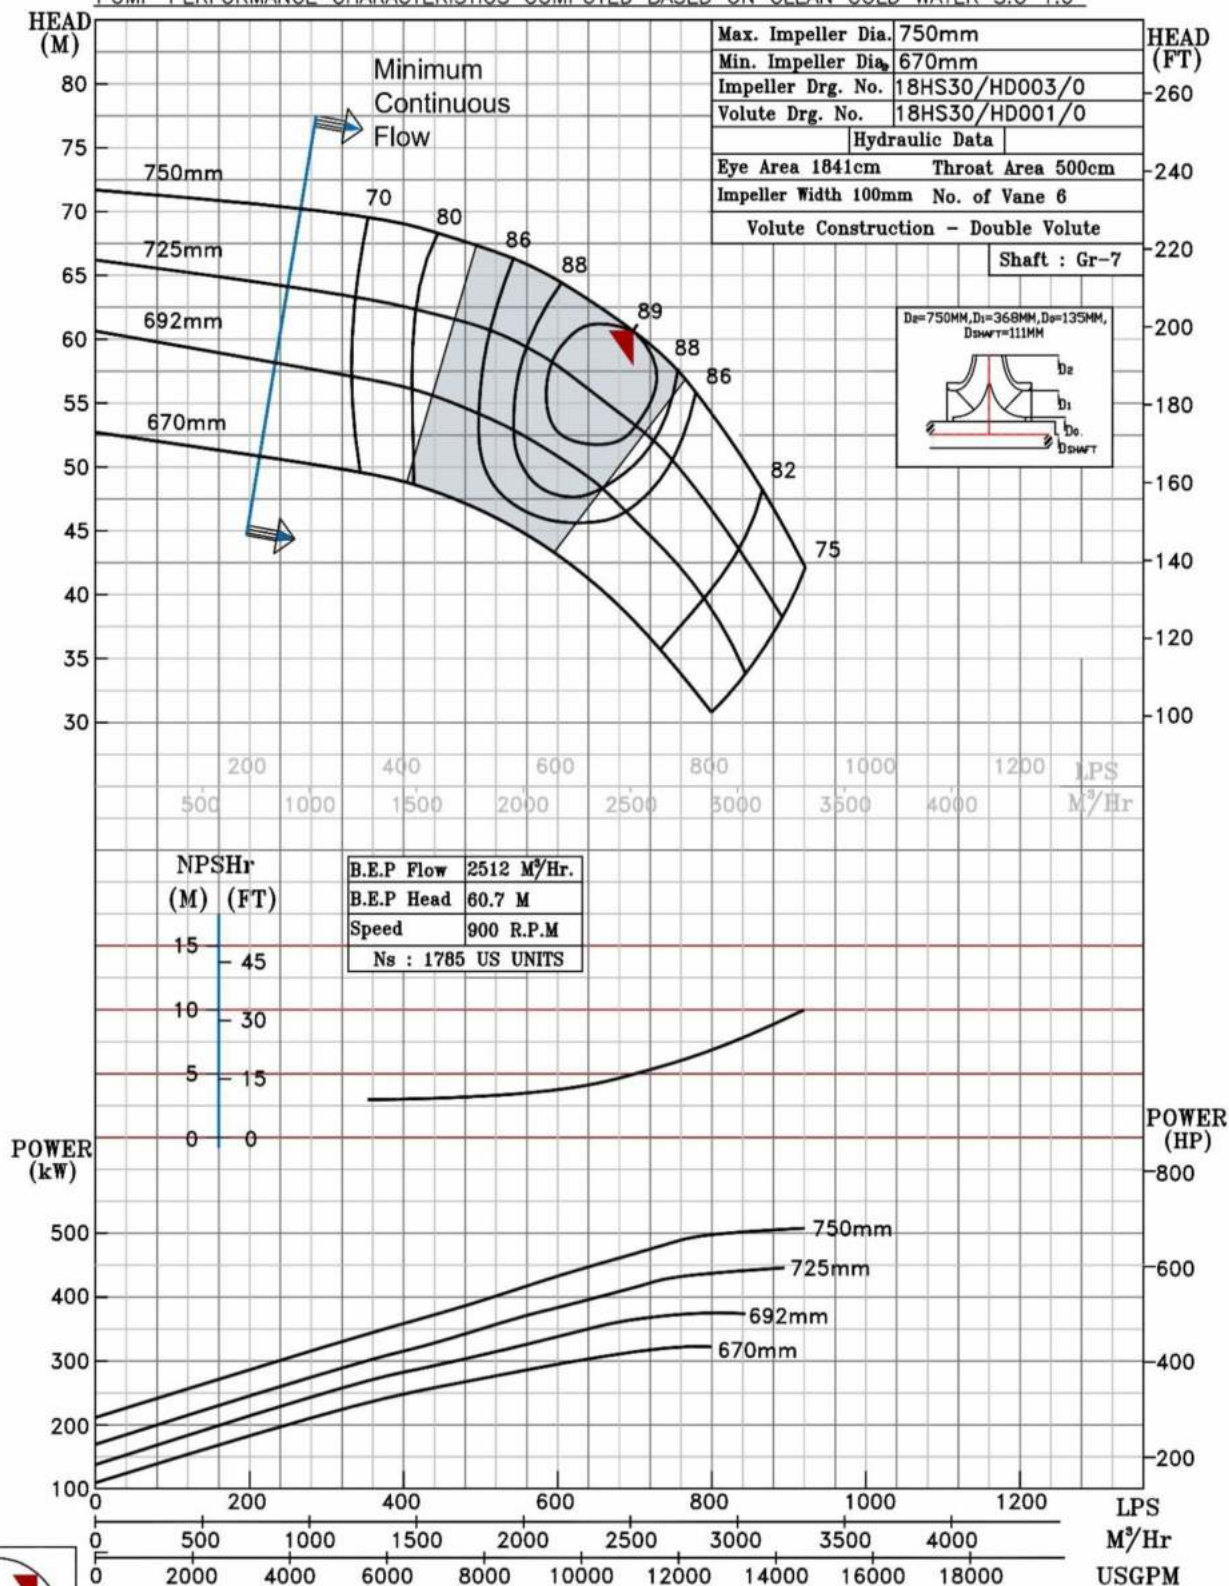


900 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 20HS19 @900 R.P.M		20HS19/X/106368	
FISHER PUMP	MODEL 20HS19	WORKING PRESS.	10 bar
	SIZE 600x500-480	TEST PRESS.	15 bar
	TYPE-AXIALLY SPLIT CASE SINGLE STAGE		
	SPEED 900 rpm		
<i>HS RANGE</i>			

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

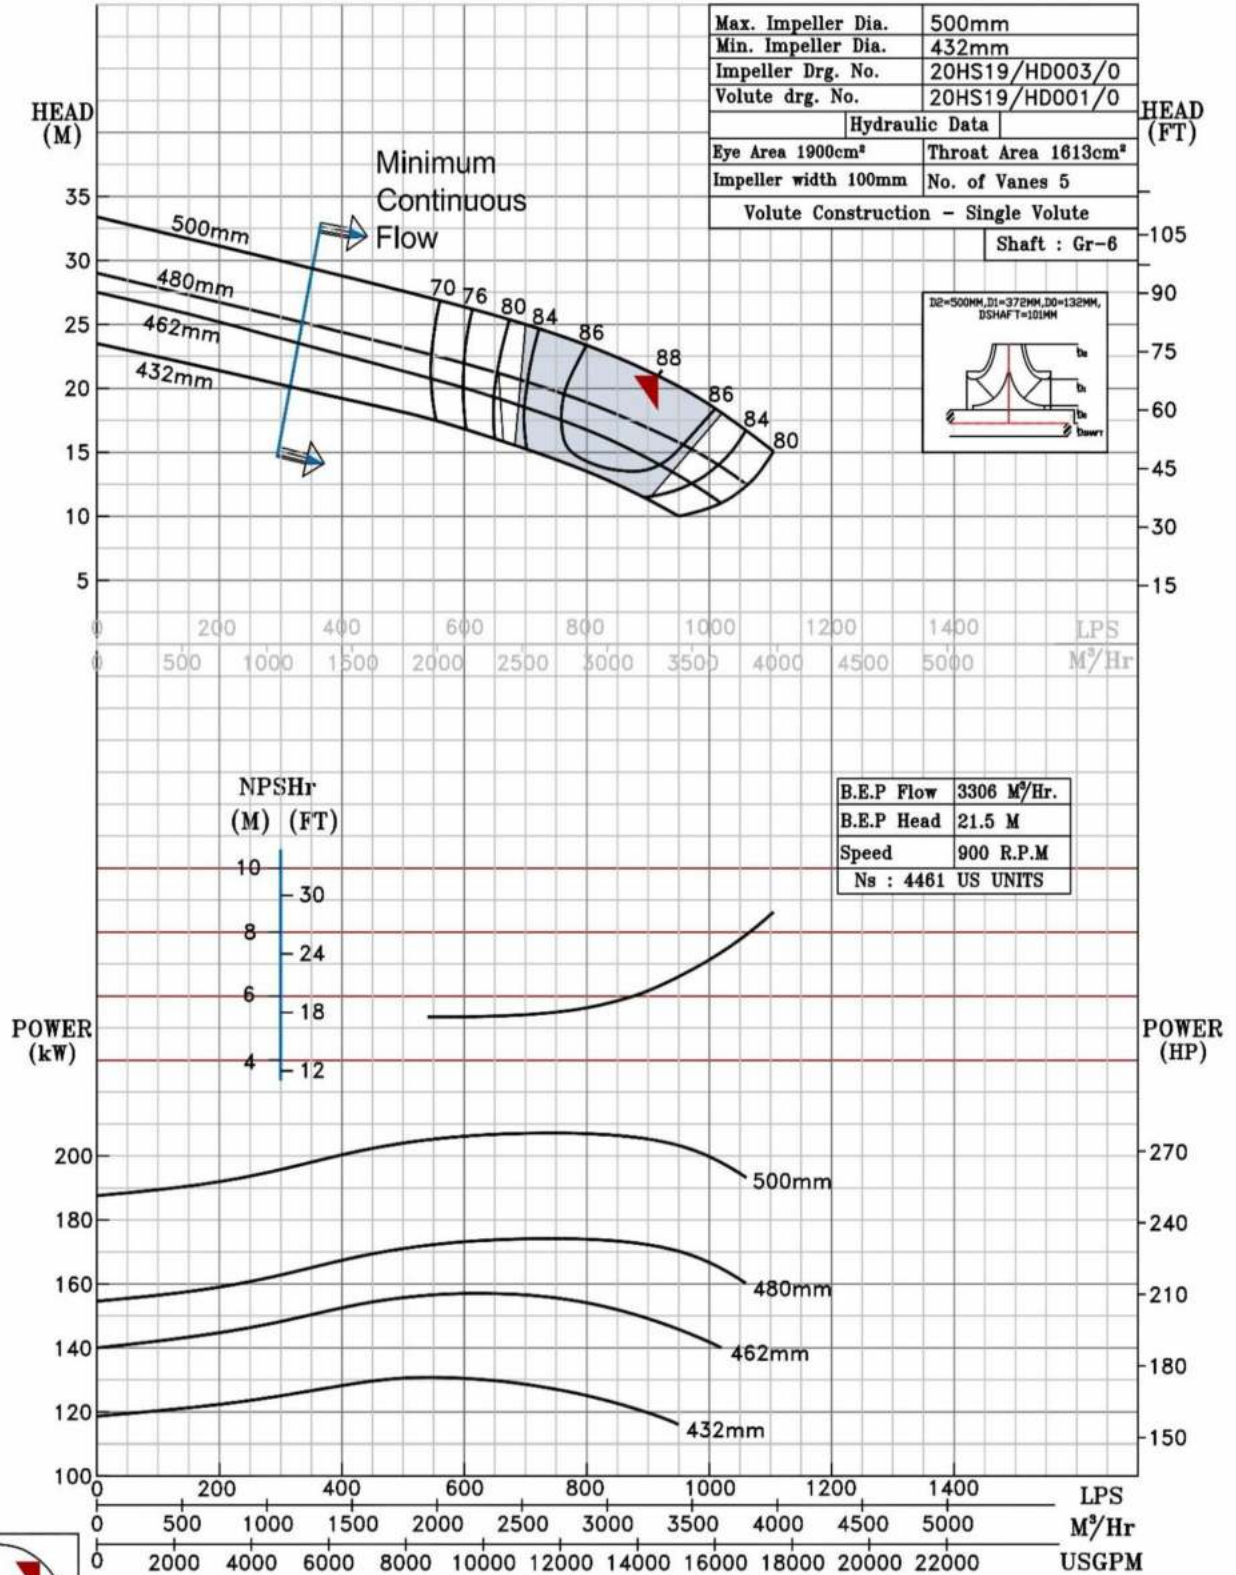

900 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 20HS23 @900 R.P.M

20HS23/X/106468

FISHER PUMP

HS RANGE

MODEL 20HS23

WORKING PRESS. 10 bar

SIZE 600x500-580


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 900 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

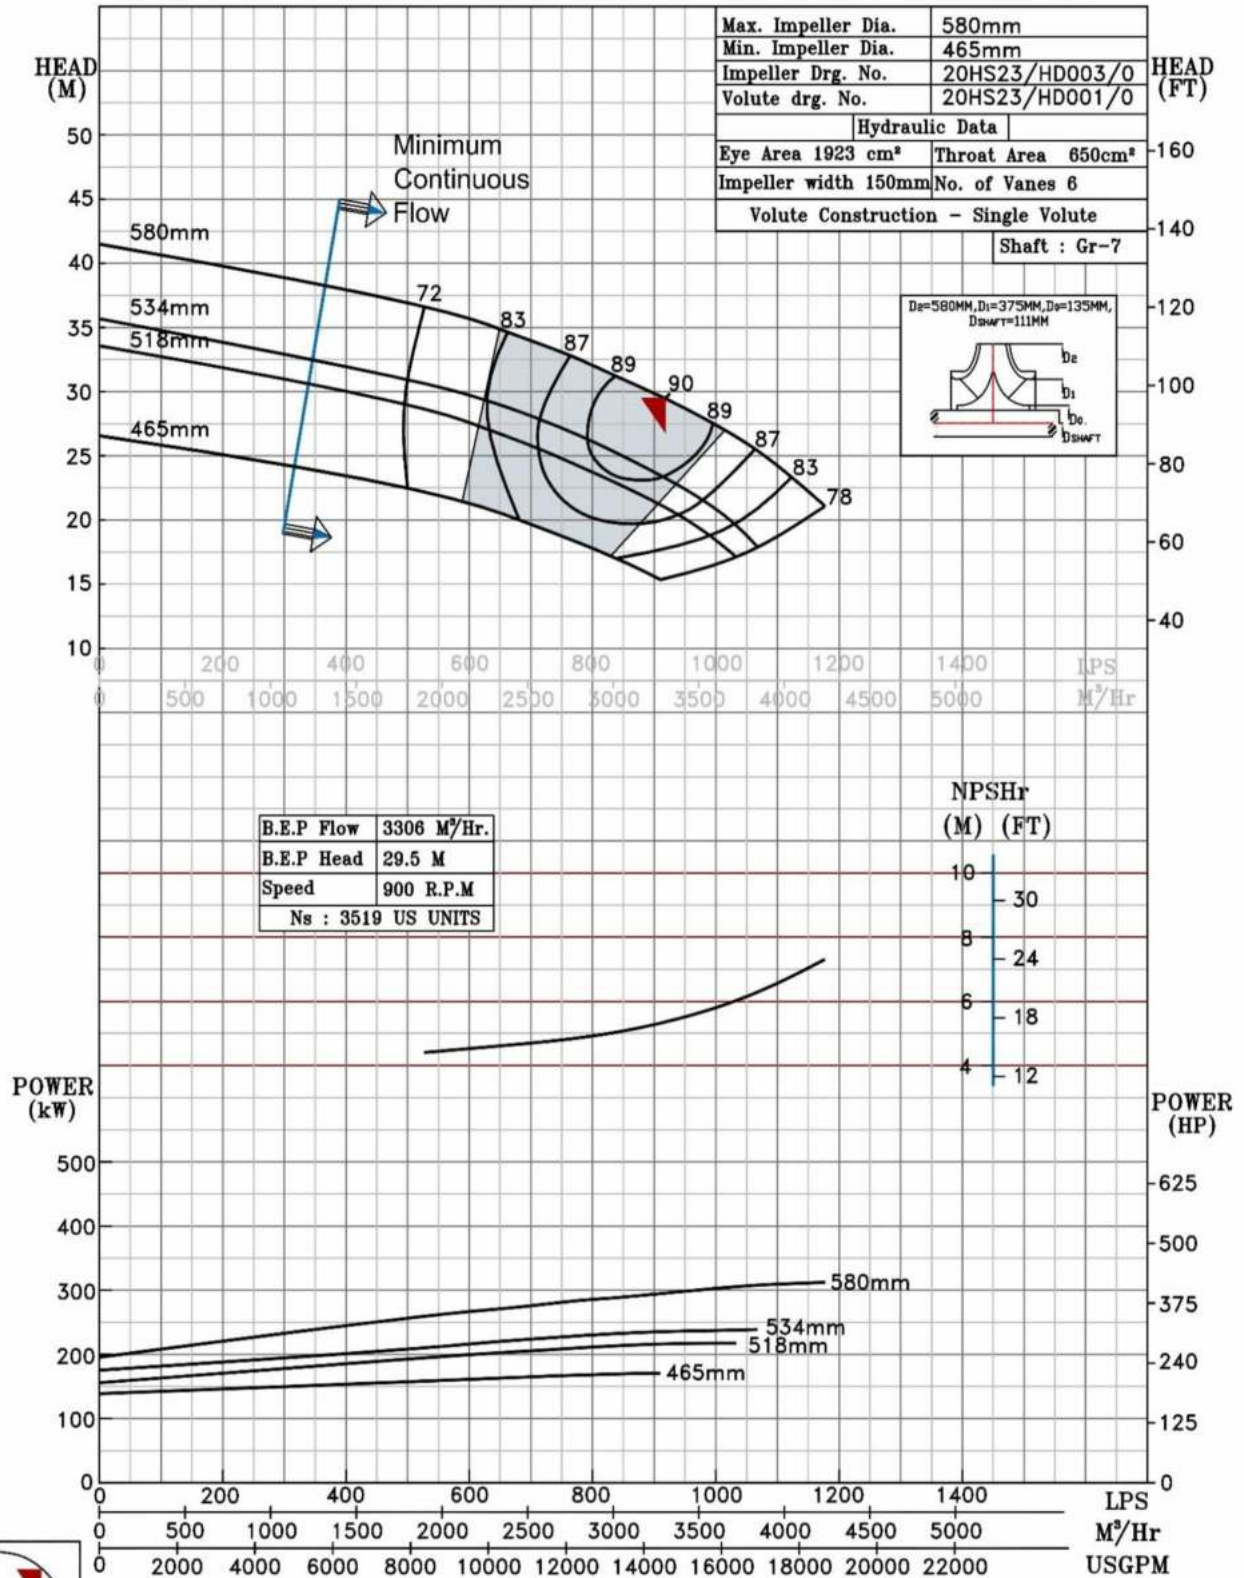

900 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 20HS25 @ 900 R.P.M

20HS25/X/106568


FISHER PUMP

HS RANGE

MODEL 20HS25	WORKING PRESS. 10 bar
SIZE 600x500-630	TEST PRESS. 15 bar
TYPE-AXIALLY SPLIT CASE SINGLE STAGE	SPEED 900 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

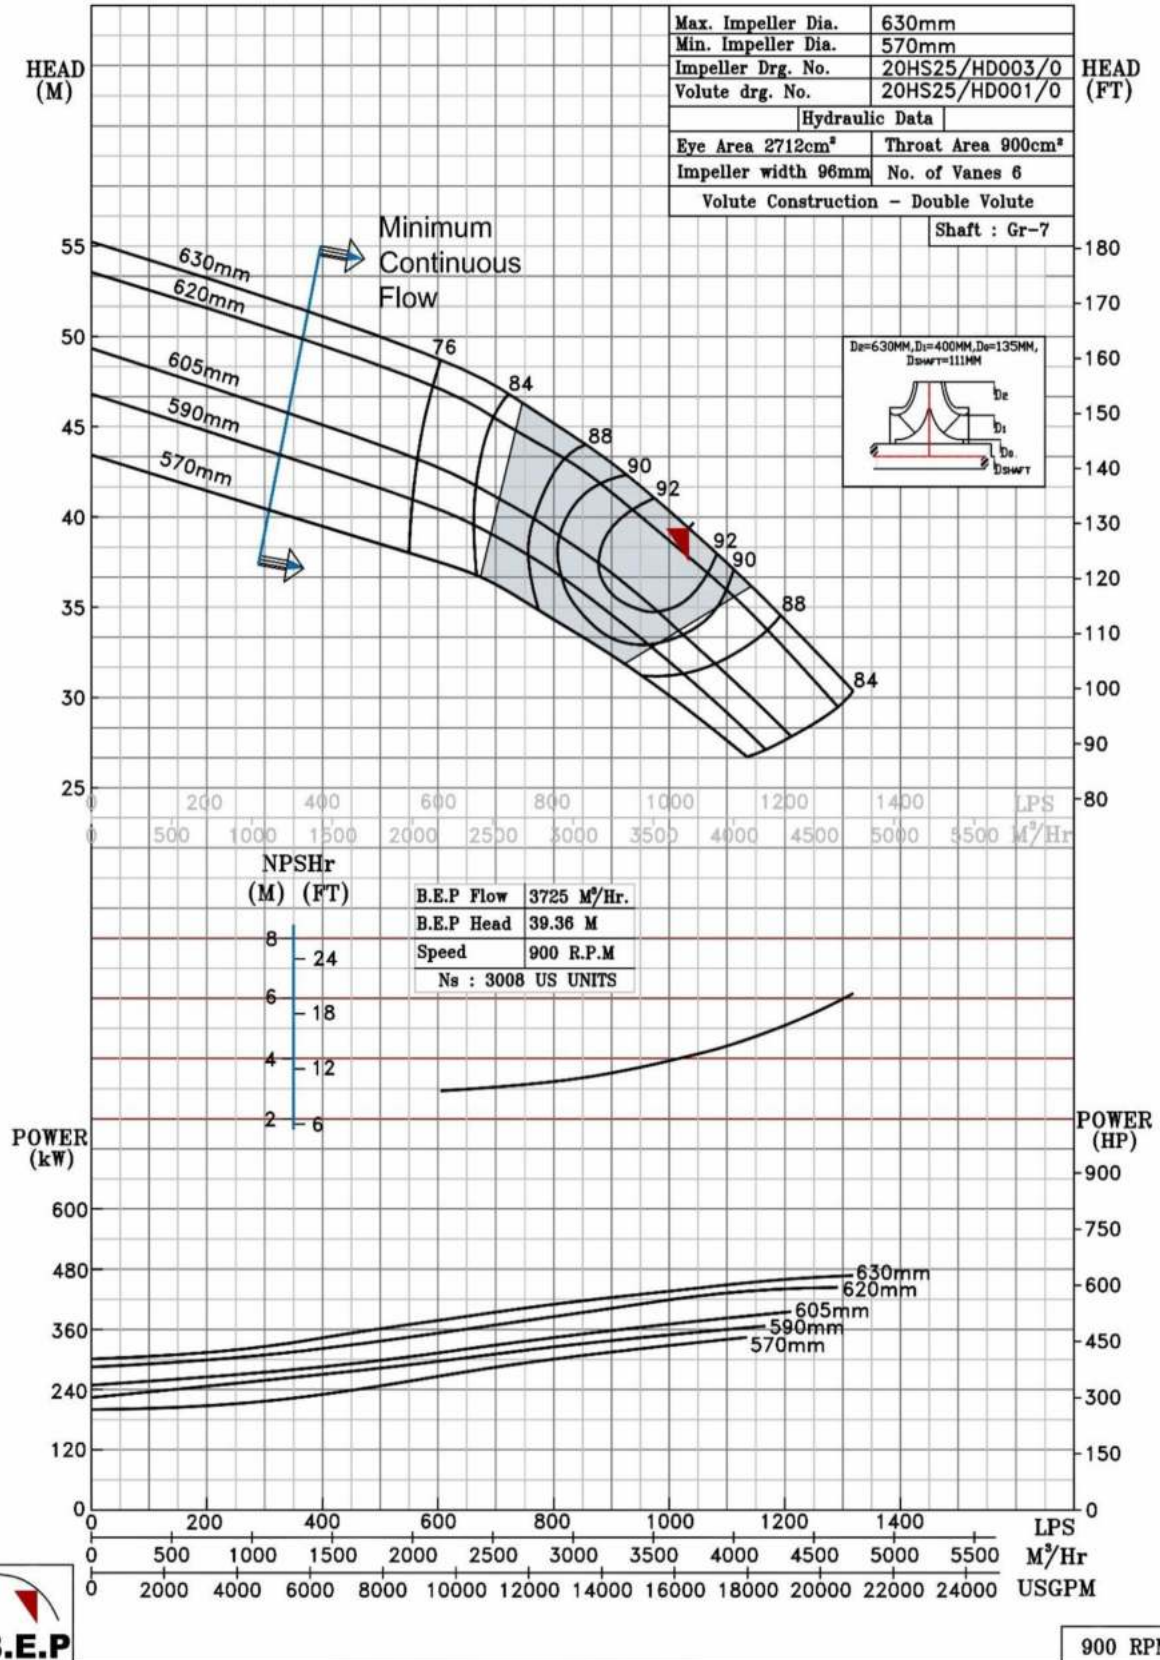

900 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 20HS27 @900 R.P.M

20HS27/X/106668

FISHER PUMP

HS RANGE

MODEL 20HS27

WORKING PRESS. 10 bar

SIZE 600x500-675


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 900 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

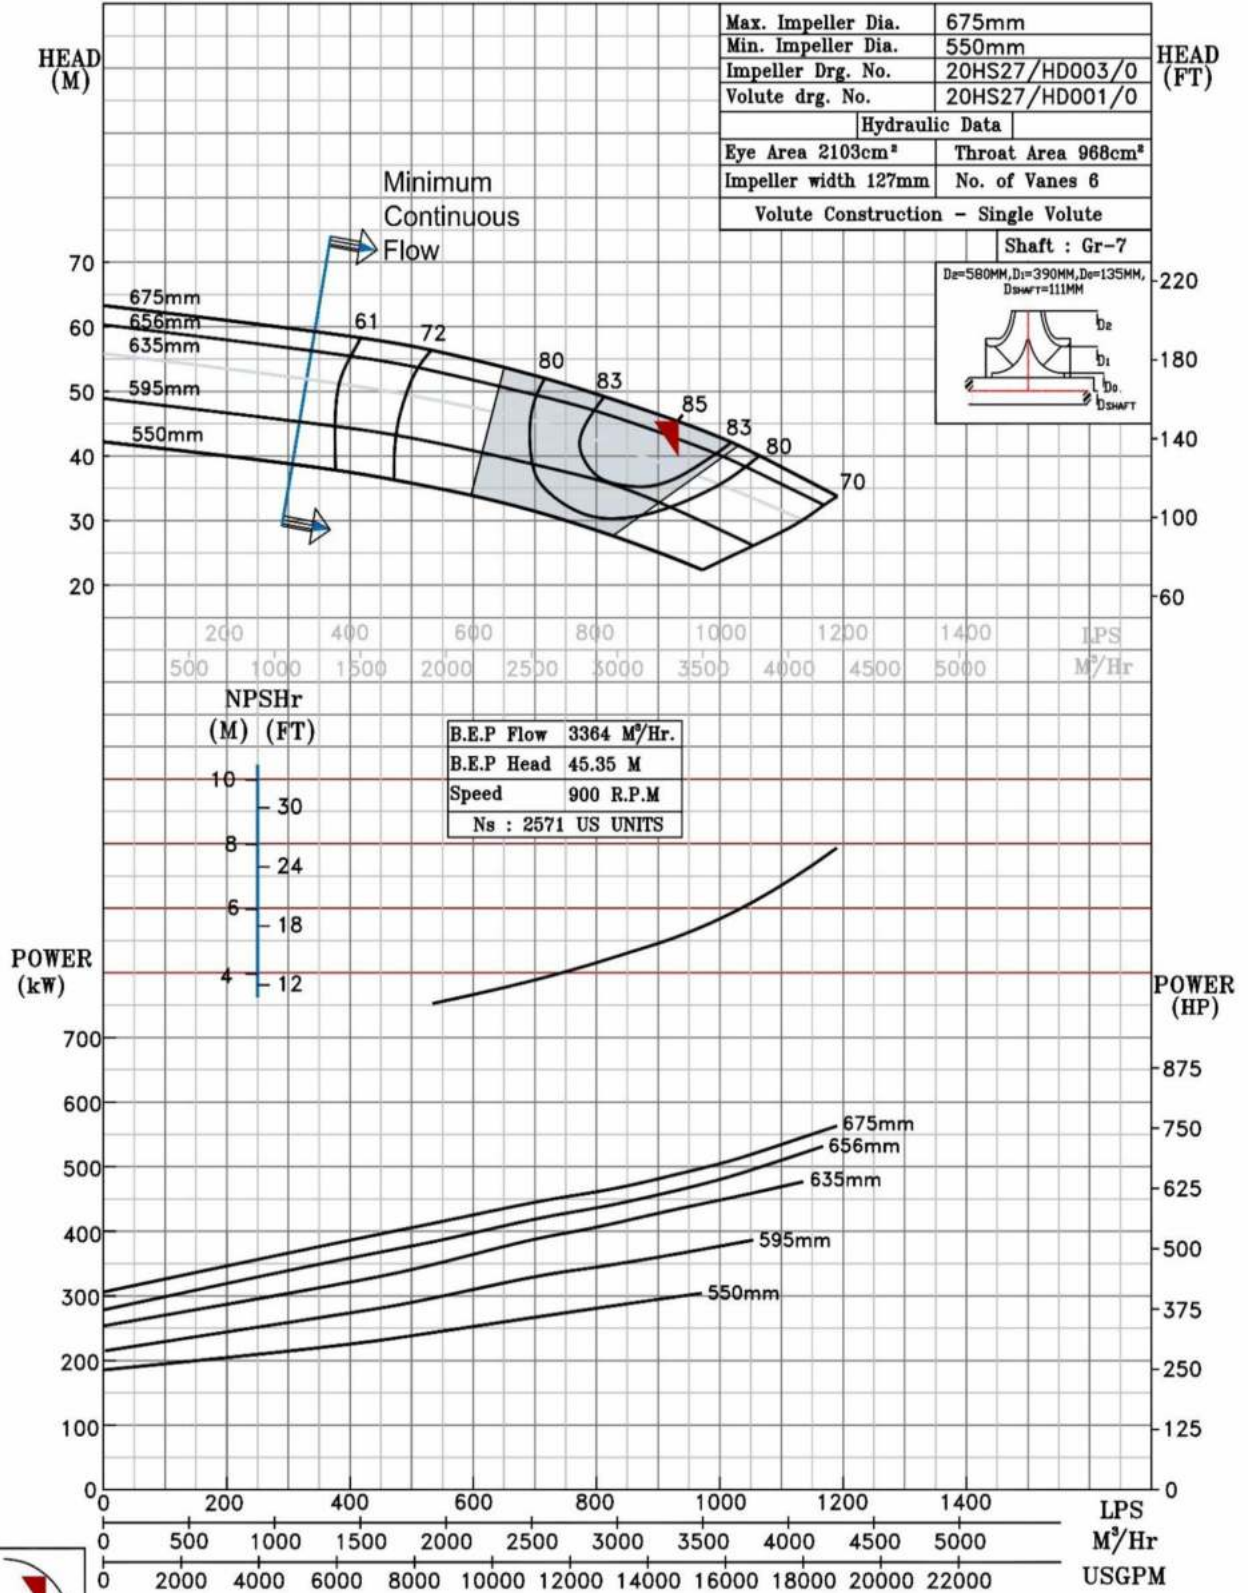

900 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 20HS31 @900 R.P.M

20HS31/X/106768

FISHER PUMP

HS RANGE

MODEL 20HS31

WORKING PRESS. 16 bar

SIZE 600x500-780

TEST PRESS. 24 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 900 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

