

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 2.5HST9 @1460 R.P.M

2.5HST9/X/300154

FISHER PUMP

HST RANGE

MODEL 2.5HST9

WORKING PRESS. 17 bar

SIZE 80x65-230


TEST PRESS. 25.5 bar

TYPE-AXIALLY SPLIT CASE TWO STAGE

SPEED 1460 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE


PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

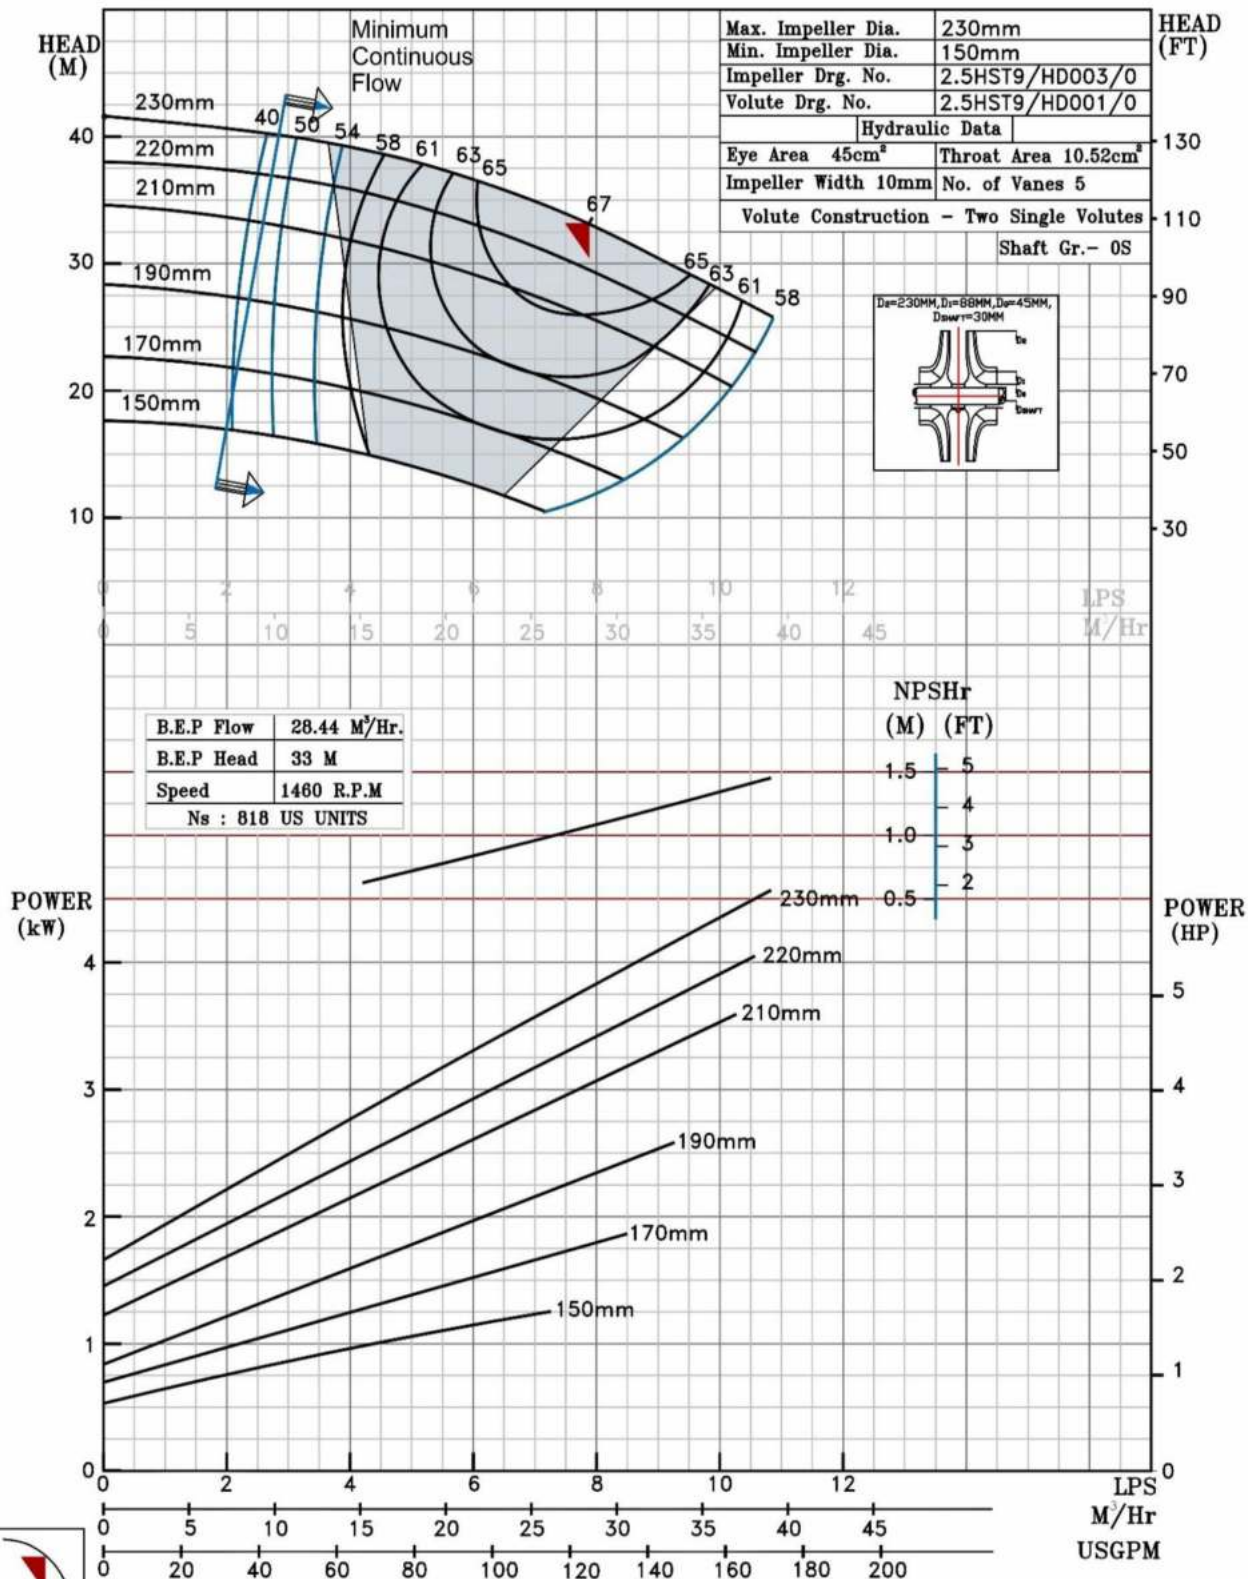

PERFORMANCE CURVE OF 2.5HST10 @1450 R.P.M		NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B	
FISHER PUMP		2.5HST10/Y/300254	
		MODEL 2.5HST10	WORKING PRESS 16 bar
		SIZE 80x65-260	TEST PRESS. 24 bar
		TYPE-AXIALLY SPLIT CASE TWO STAGE	
HST RANGE		SPEED 1450 rpm	

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

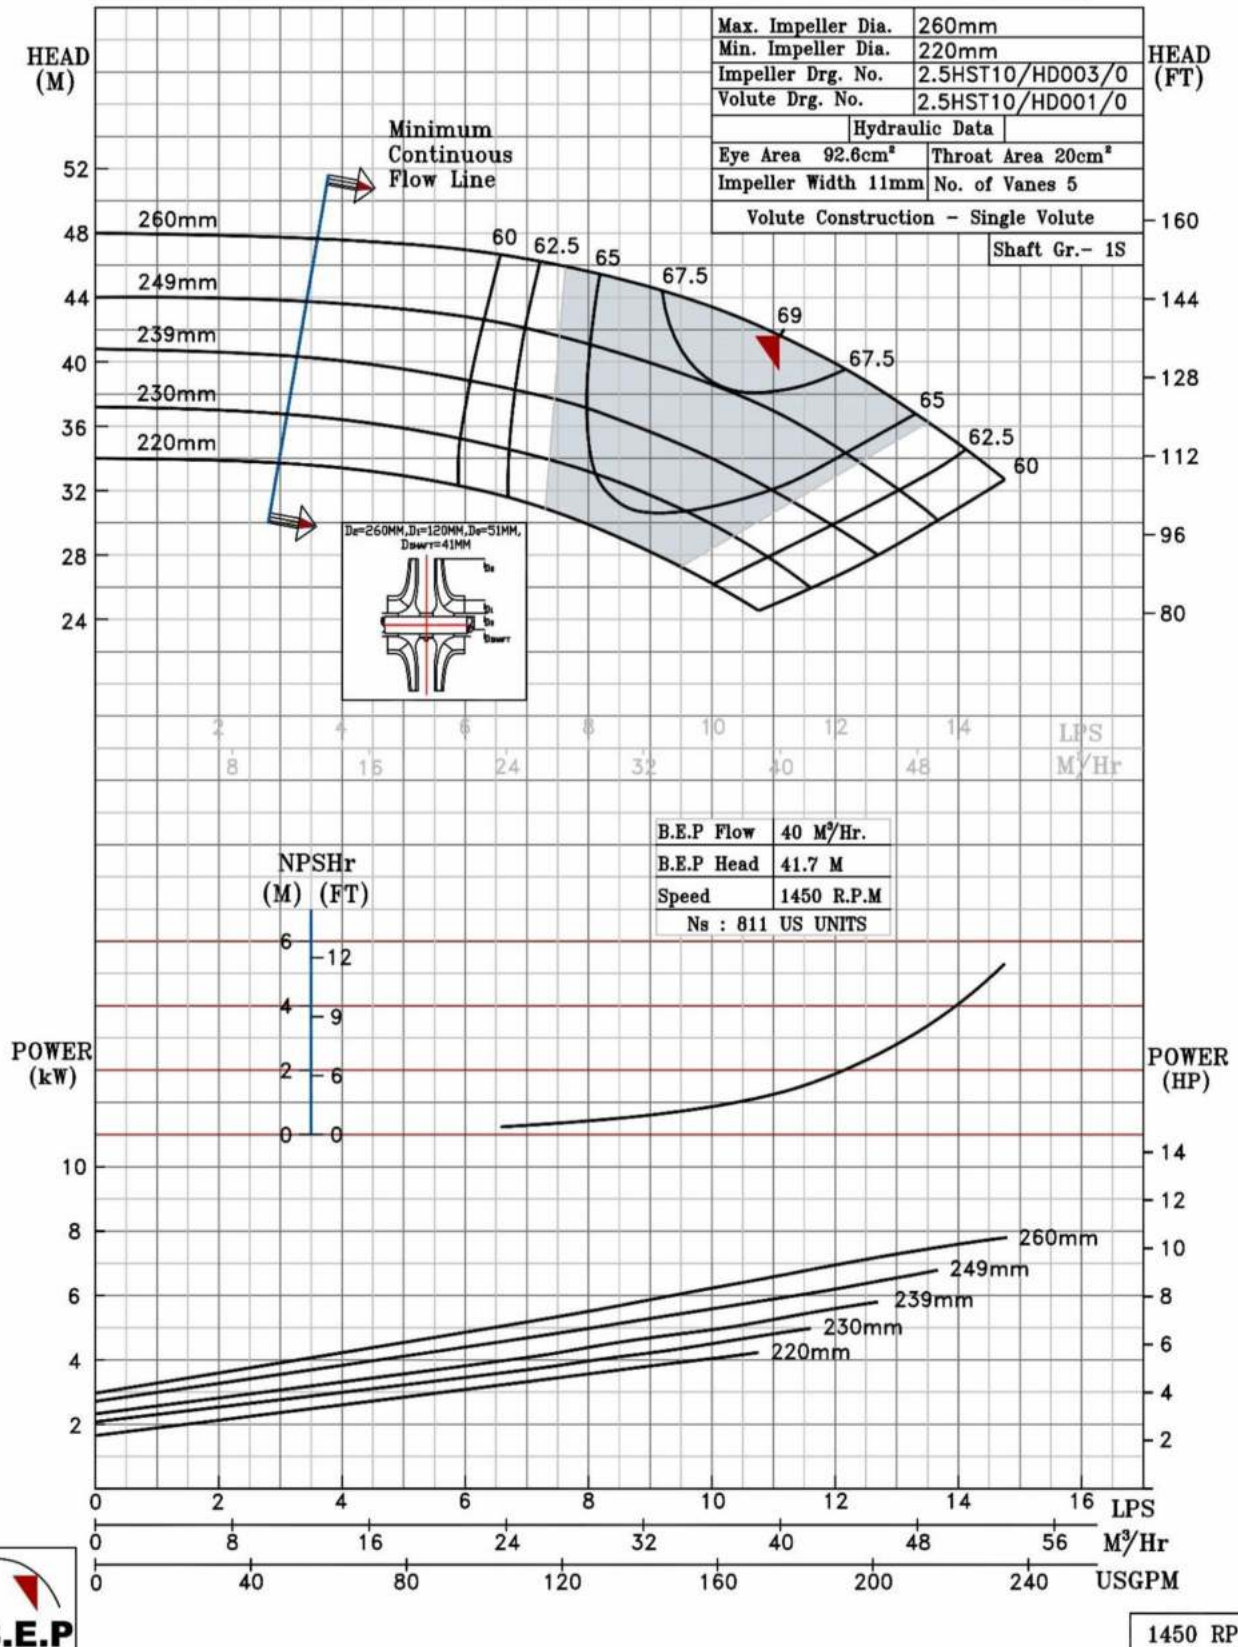

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 2.5HST12 @1450 R.P.M

2.5HST12/X/300354

FISHER PUMP

HST RANGE

MODEL 2.5HST12

WORKING PRESS. 10 bar

SIZE 80x65-305


TEST PRESS. 15 bar

TYPE-AXIALLY SPLIT CASE TWO STAGE

SPEED 1450 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

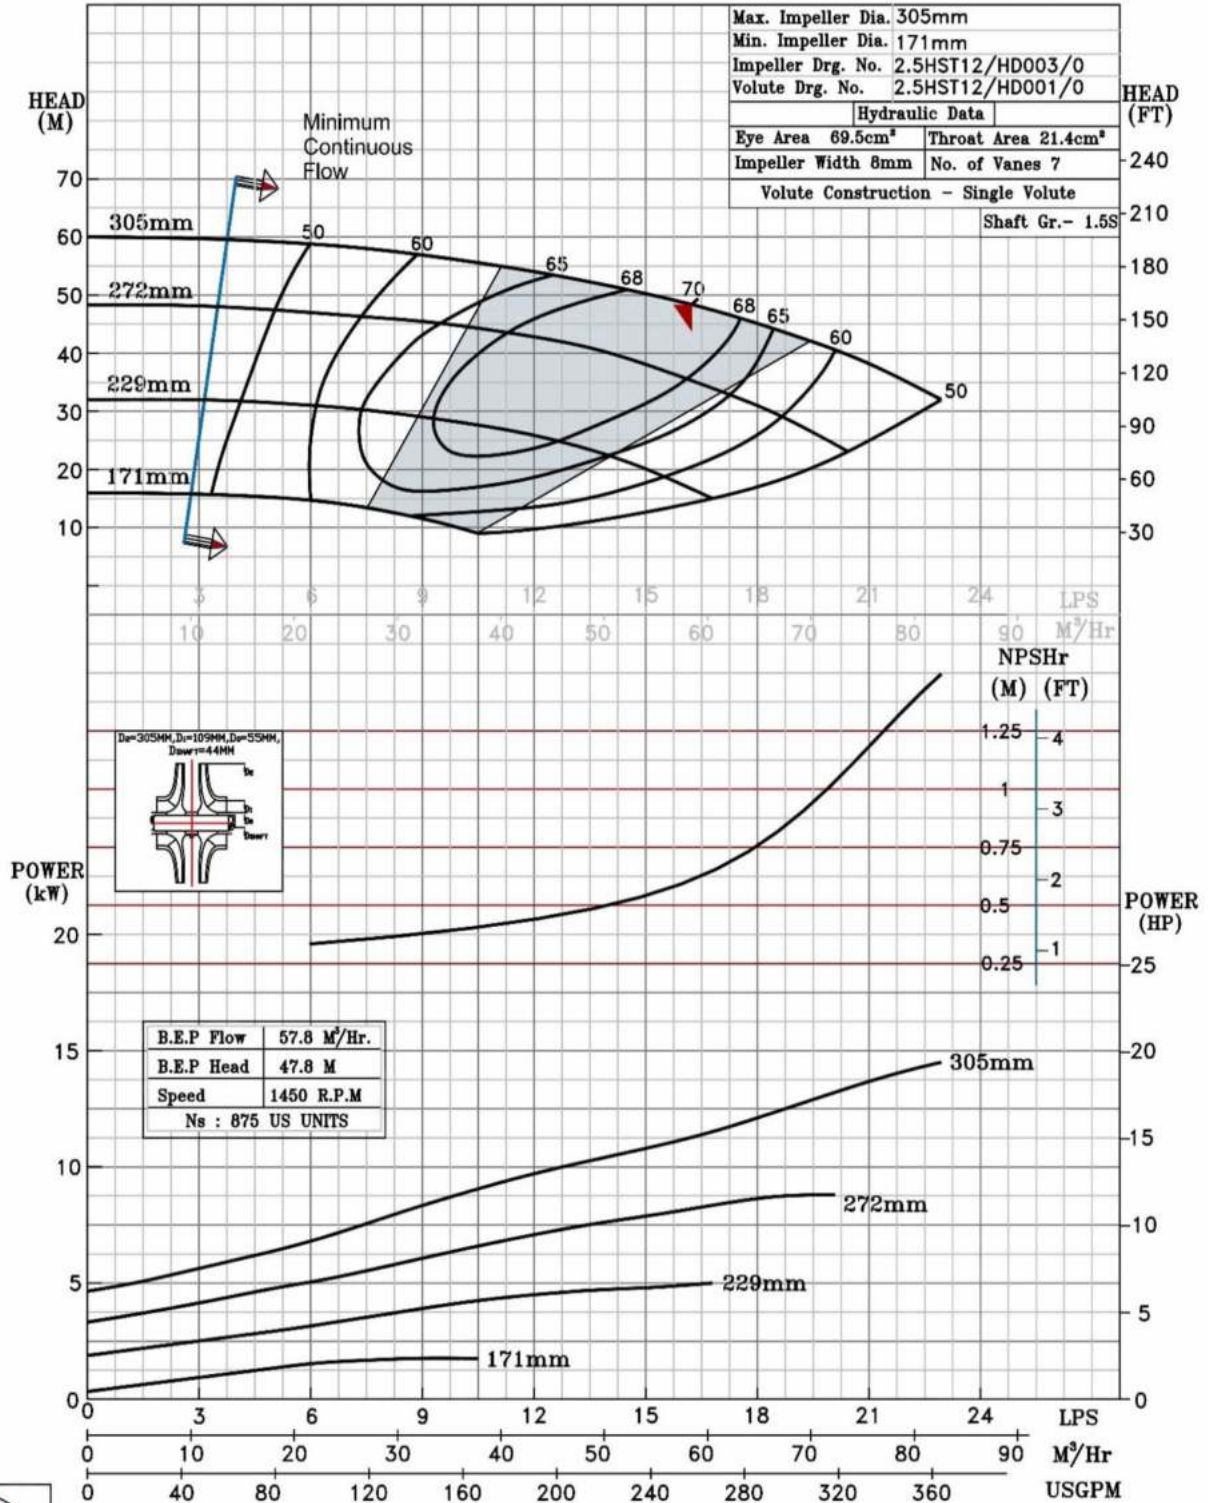

1450 RPM

PERFORMANCE CURVE OF 3HST12 @1460 R.P.M

3HST12/Y/300454

FISHER PUMP

HST RANGE

MODEL 3HST12

WORKING PRESS. 16 bar

SIZE 100x80-306


TEST PRESS. 24 bar

TYPE-AXIALLY SPLIT CASE TWO STAGE

SPEED 1460 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

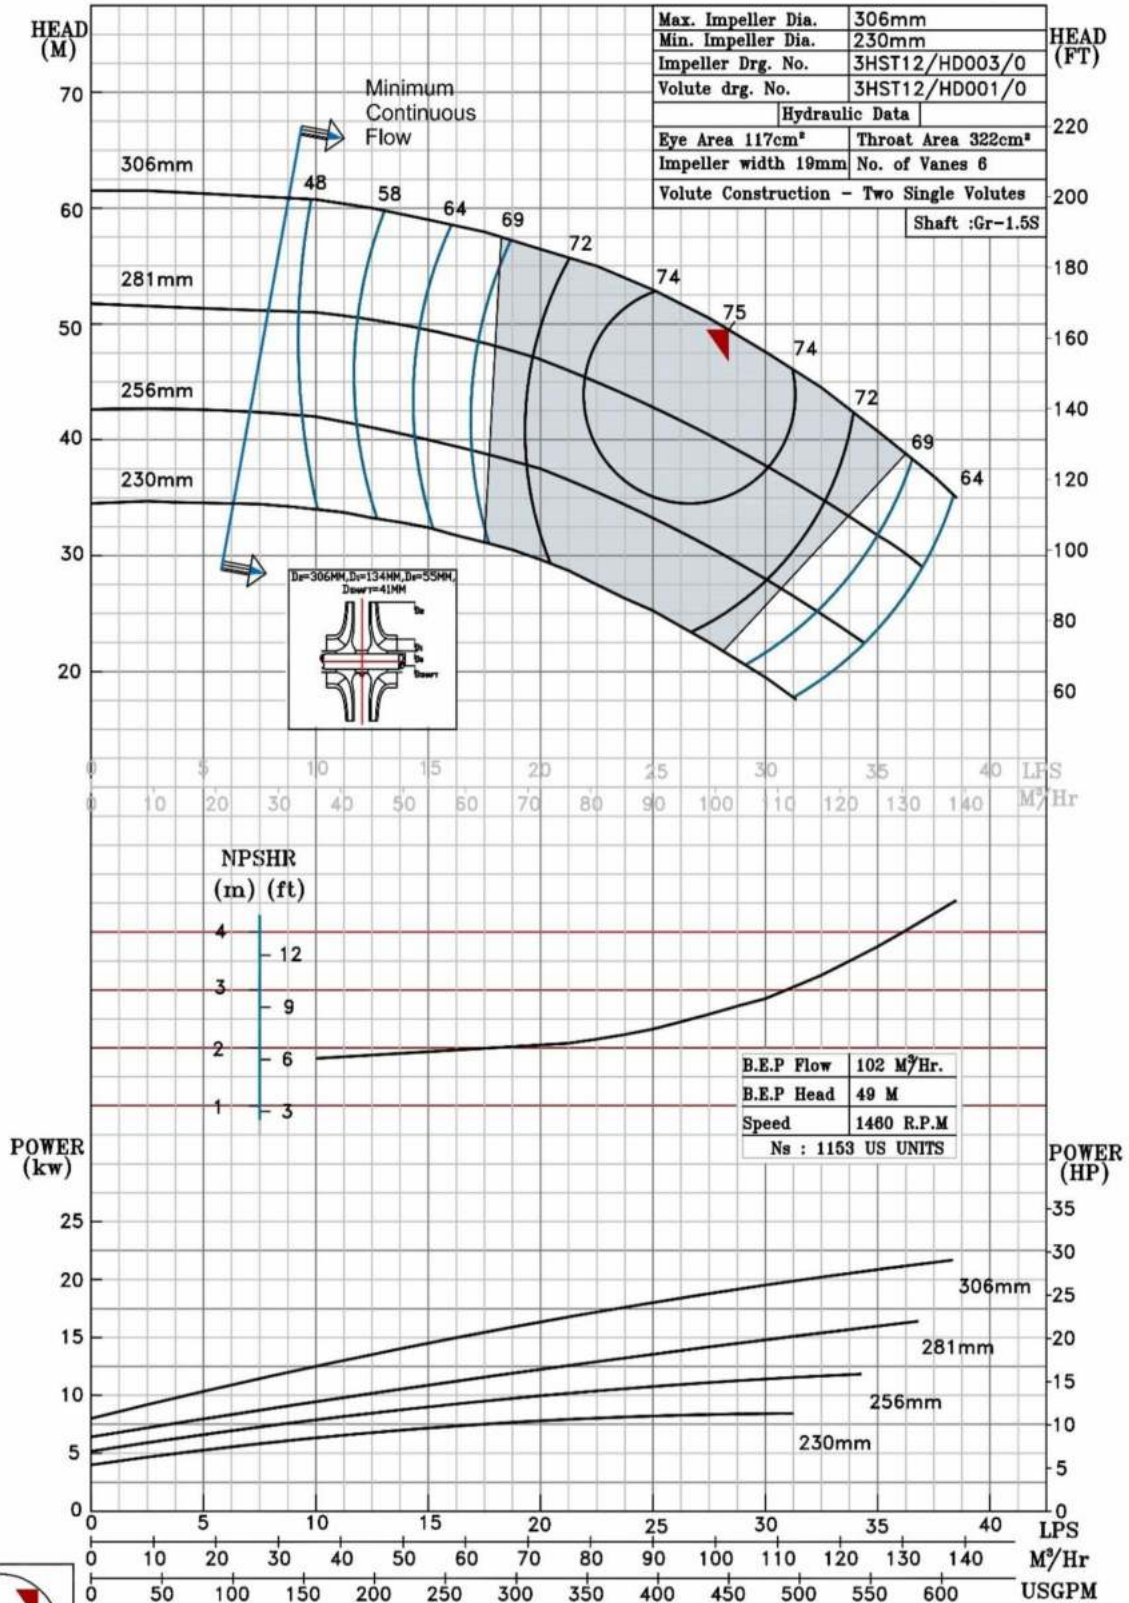


1460 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B	
PERFORMANCE CURVE OF 3HSTD14 @1485 R.P.M	3HSTD14/Y/300554
FISHER PUMP	MODEL 3HSTD14 WORKING PRESS.16 bar
<i>HST RANGE</i>	SIZE 125x80-350 TEST PRESS. 24 bar
	TYPE-AXIALLY SPLIT CASE TWO STAGE
	SPEED 1485 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

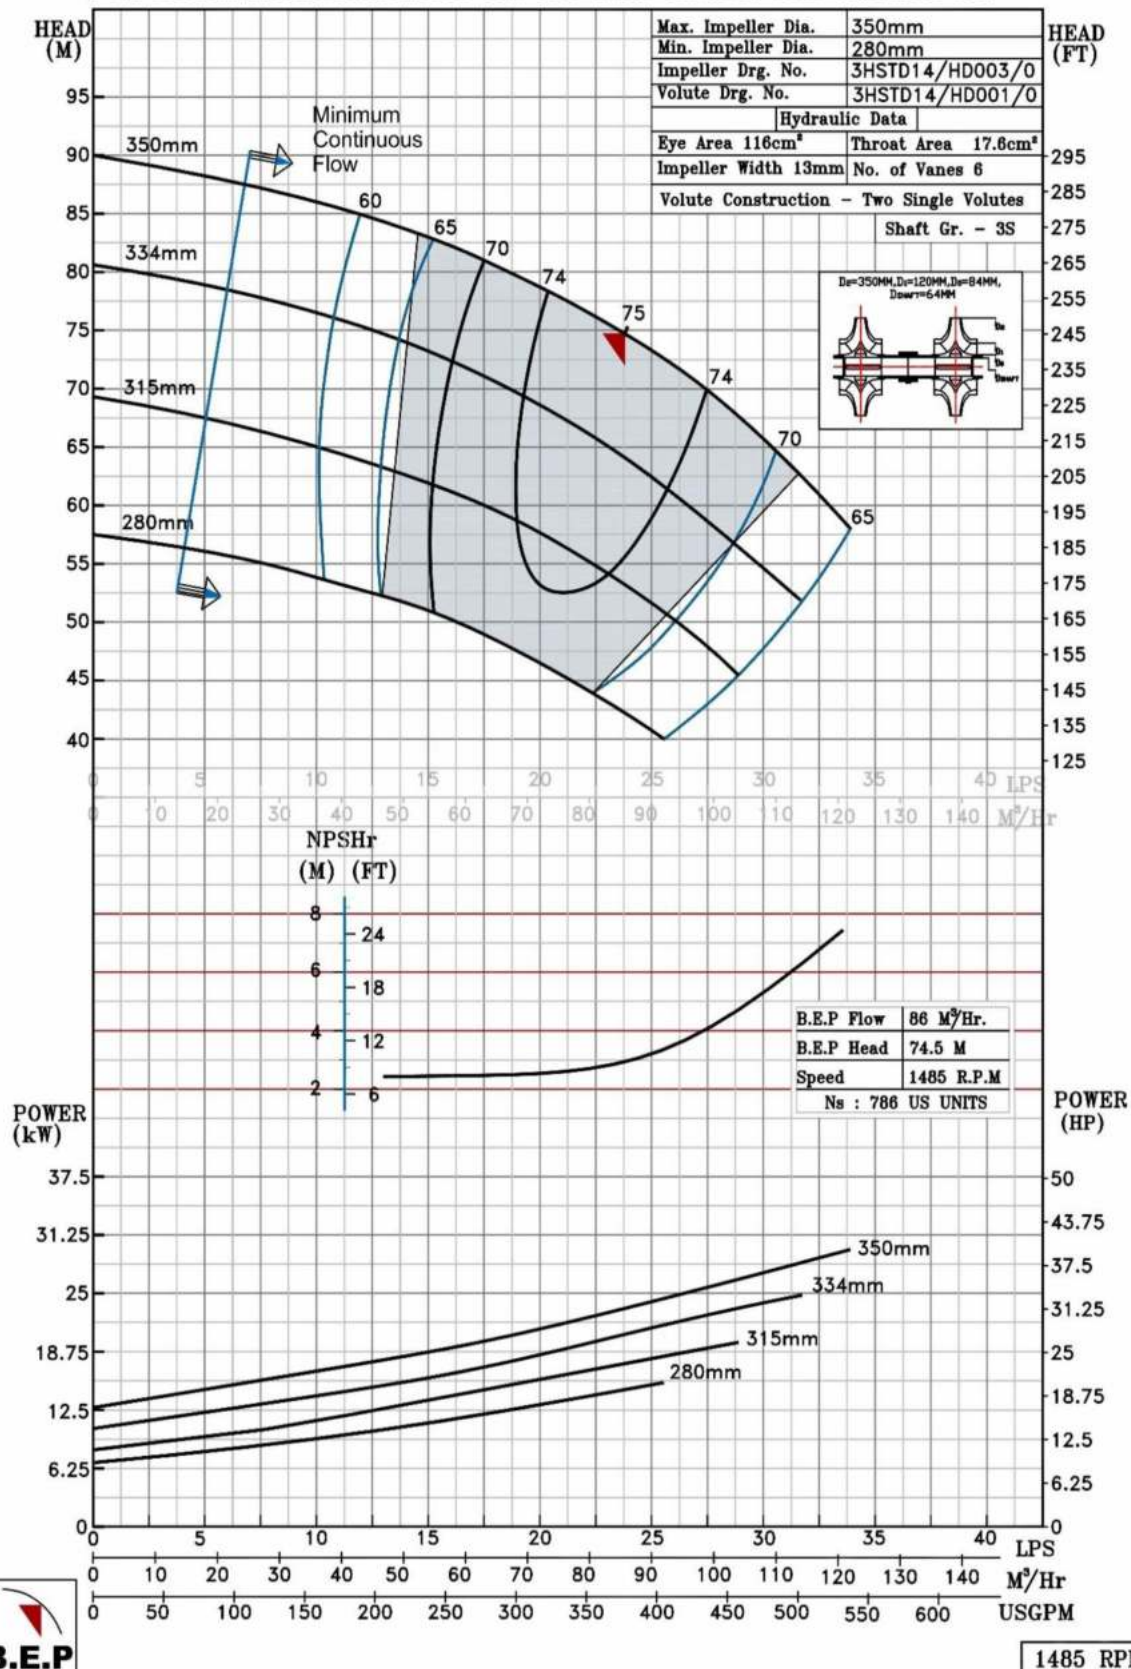

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 3HST15 @1480 R.P.M

3HST15/X/300654

FISHER PUMP

HST RANGE

MODEL 3HST15

WORKING PRESS. 16 bar

SIZE 100x80-390


TEST PRESS. 24 bar

TYPE-AXIALY SPLIT CASE TWO STAGE

SPEED 1480 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

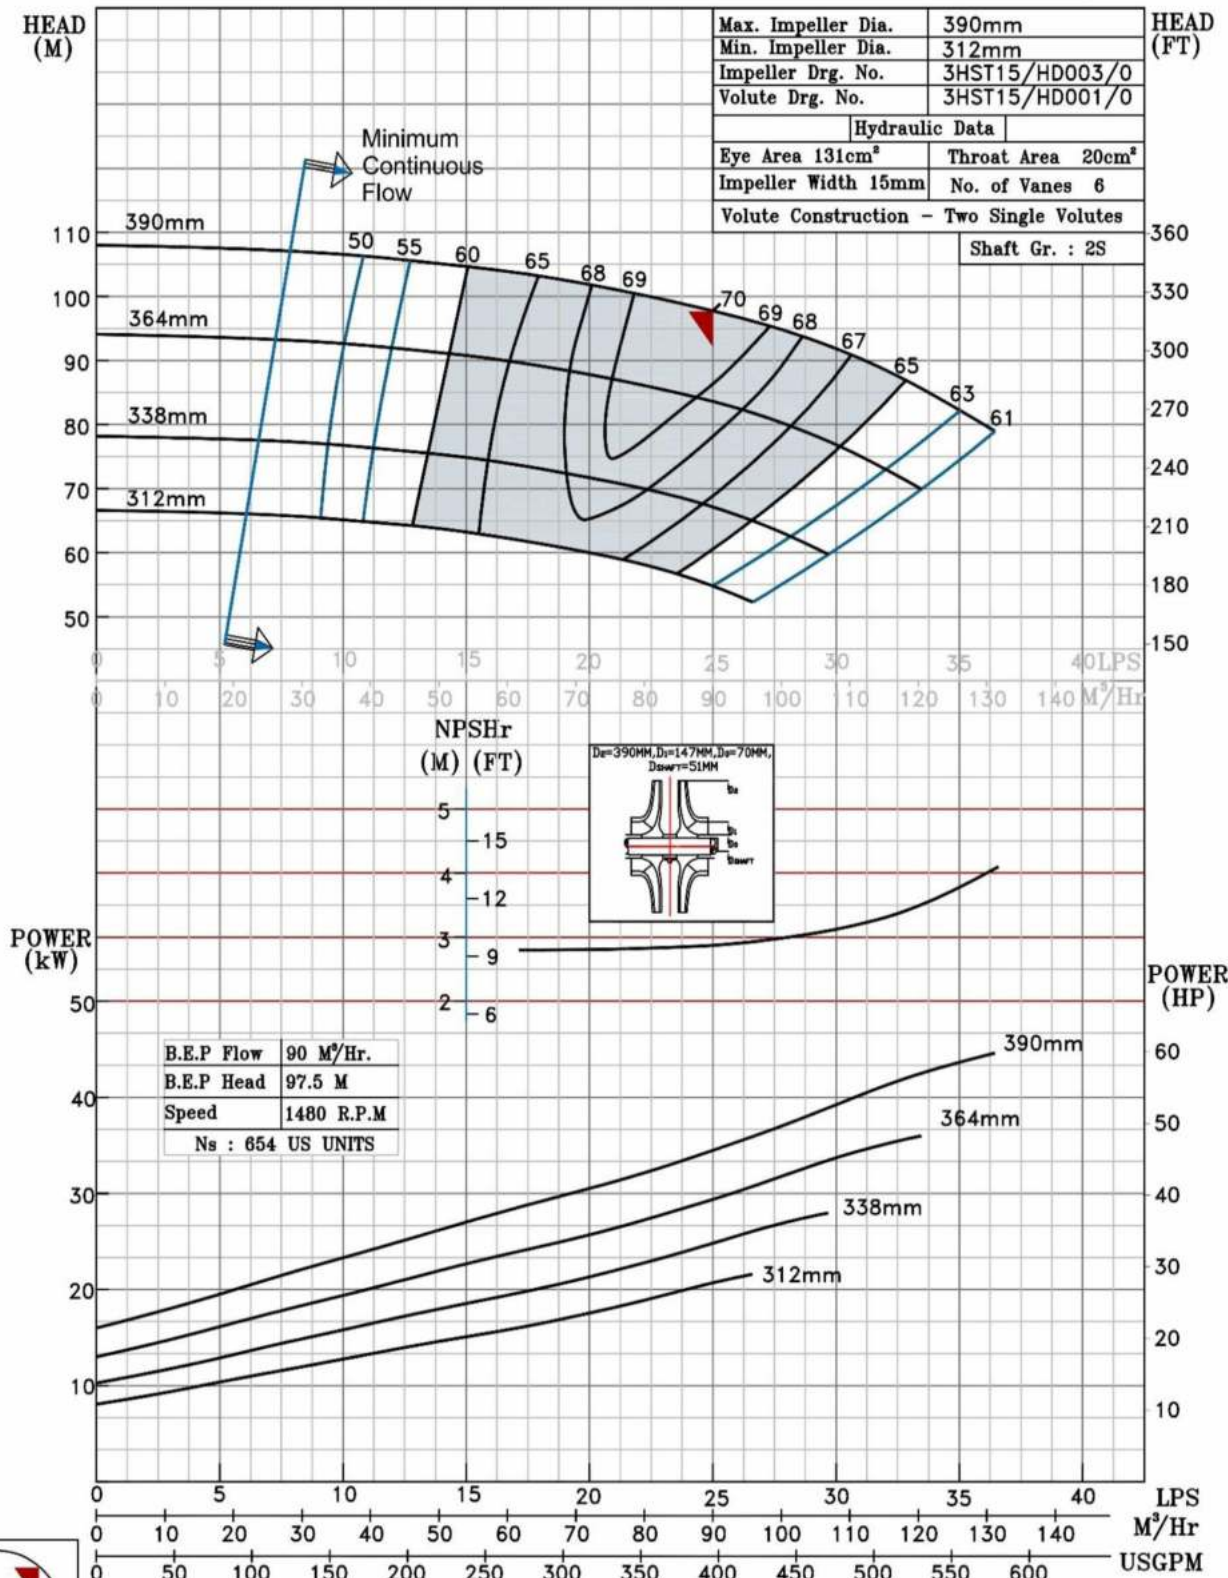


1480 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 4HST13 @1480 R.P.M		4HST13/X/300754	
FISHER PUMP	MODEL 4HST13	WORKING PRESS.	16 bar
	SIZE 125x100-350	TEST PRESS.	24 bar
	TYPE-AXIALLY SPLIT CASE TWO STAGE		
HST RANGE		SPEED 1480 rpm	

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

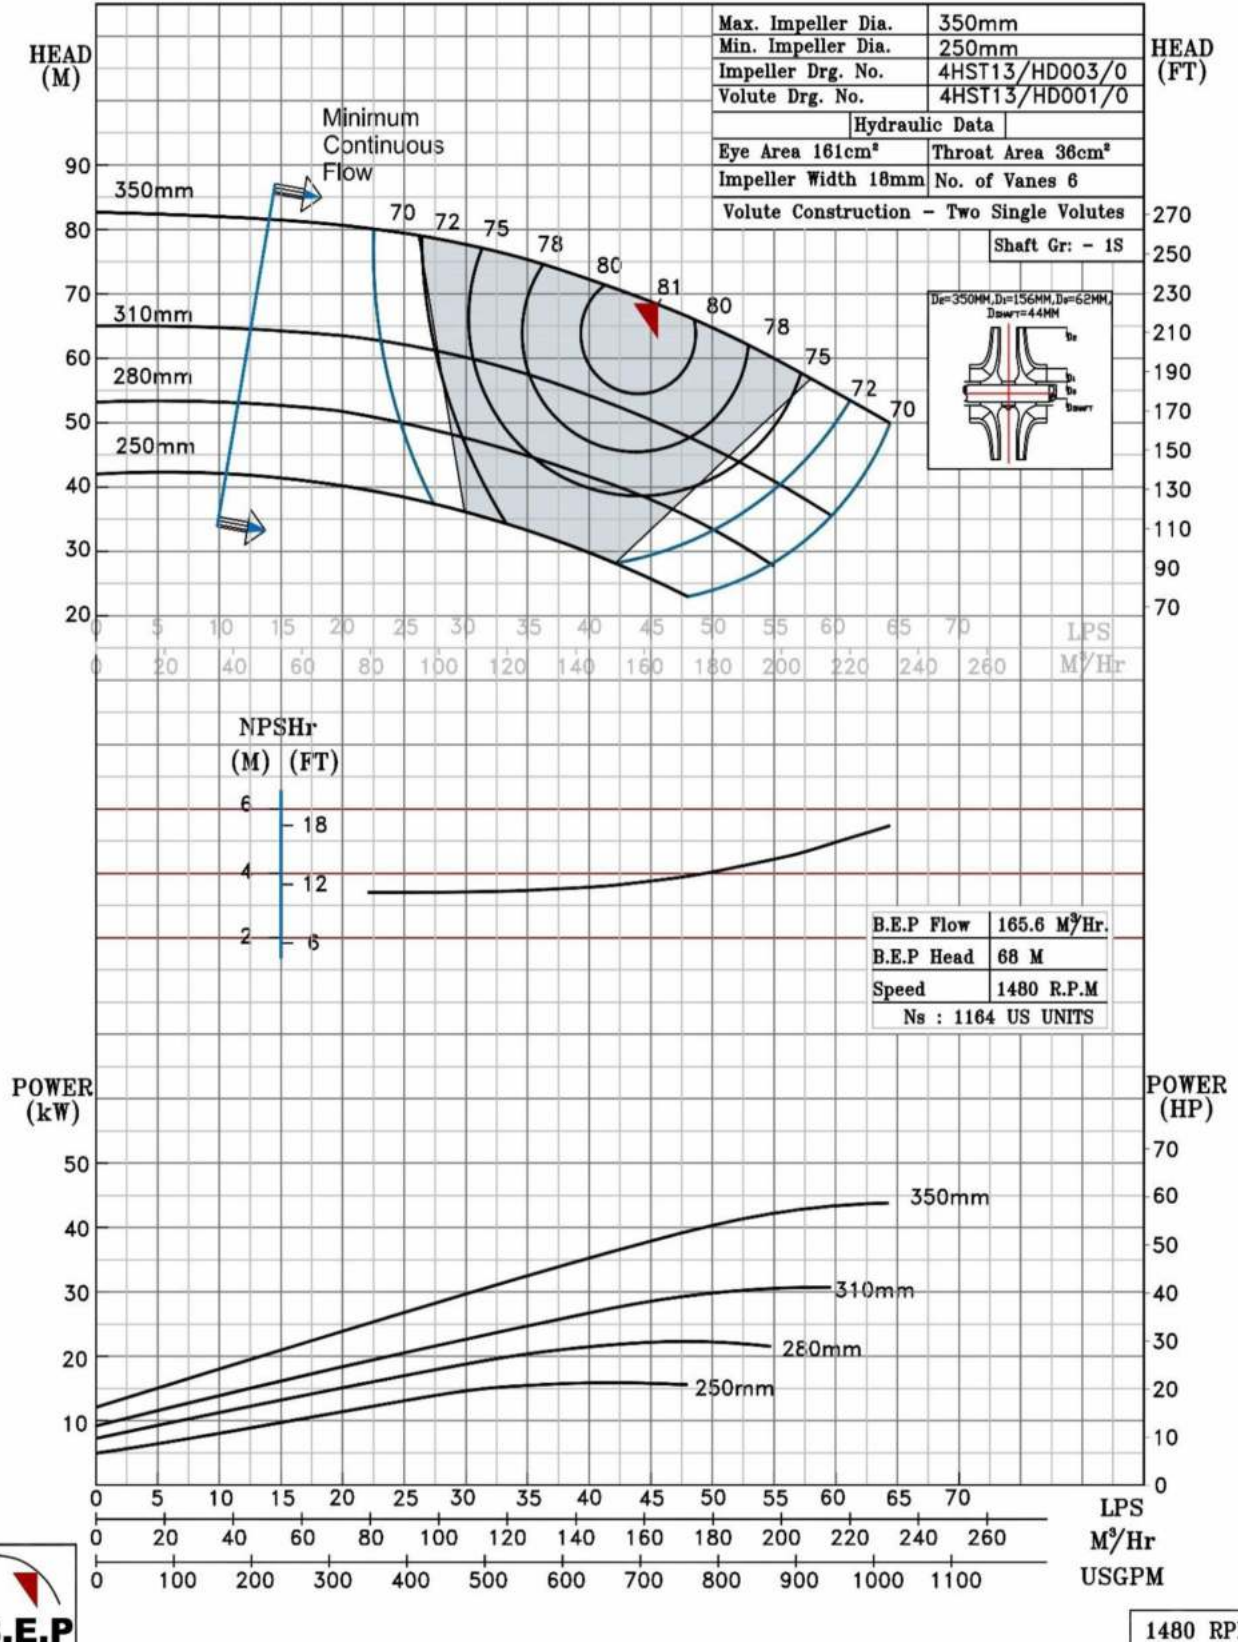

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 4HST14 @1480 R.P.M

4HST14/Y/300854

FISHER PUMP

HST RANGE

MODEL 4HST14

WORKING PRESS. 16 bar

SIZE 150x100-352


TEST PRESS. 24 bar

TYPE-AXIALLY SPLIT CASE TWO STAGE

SPEED 1480 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

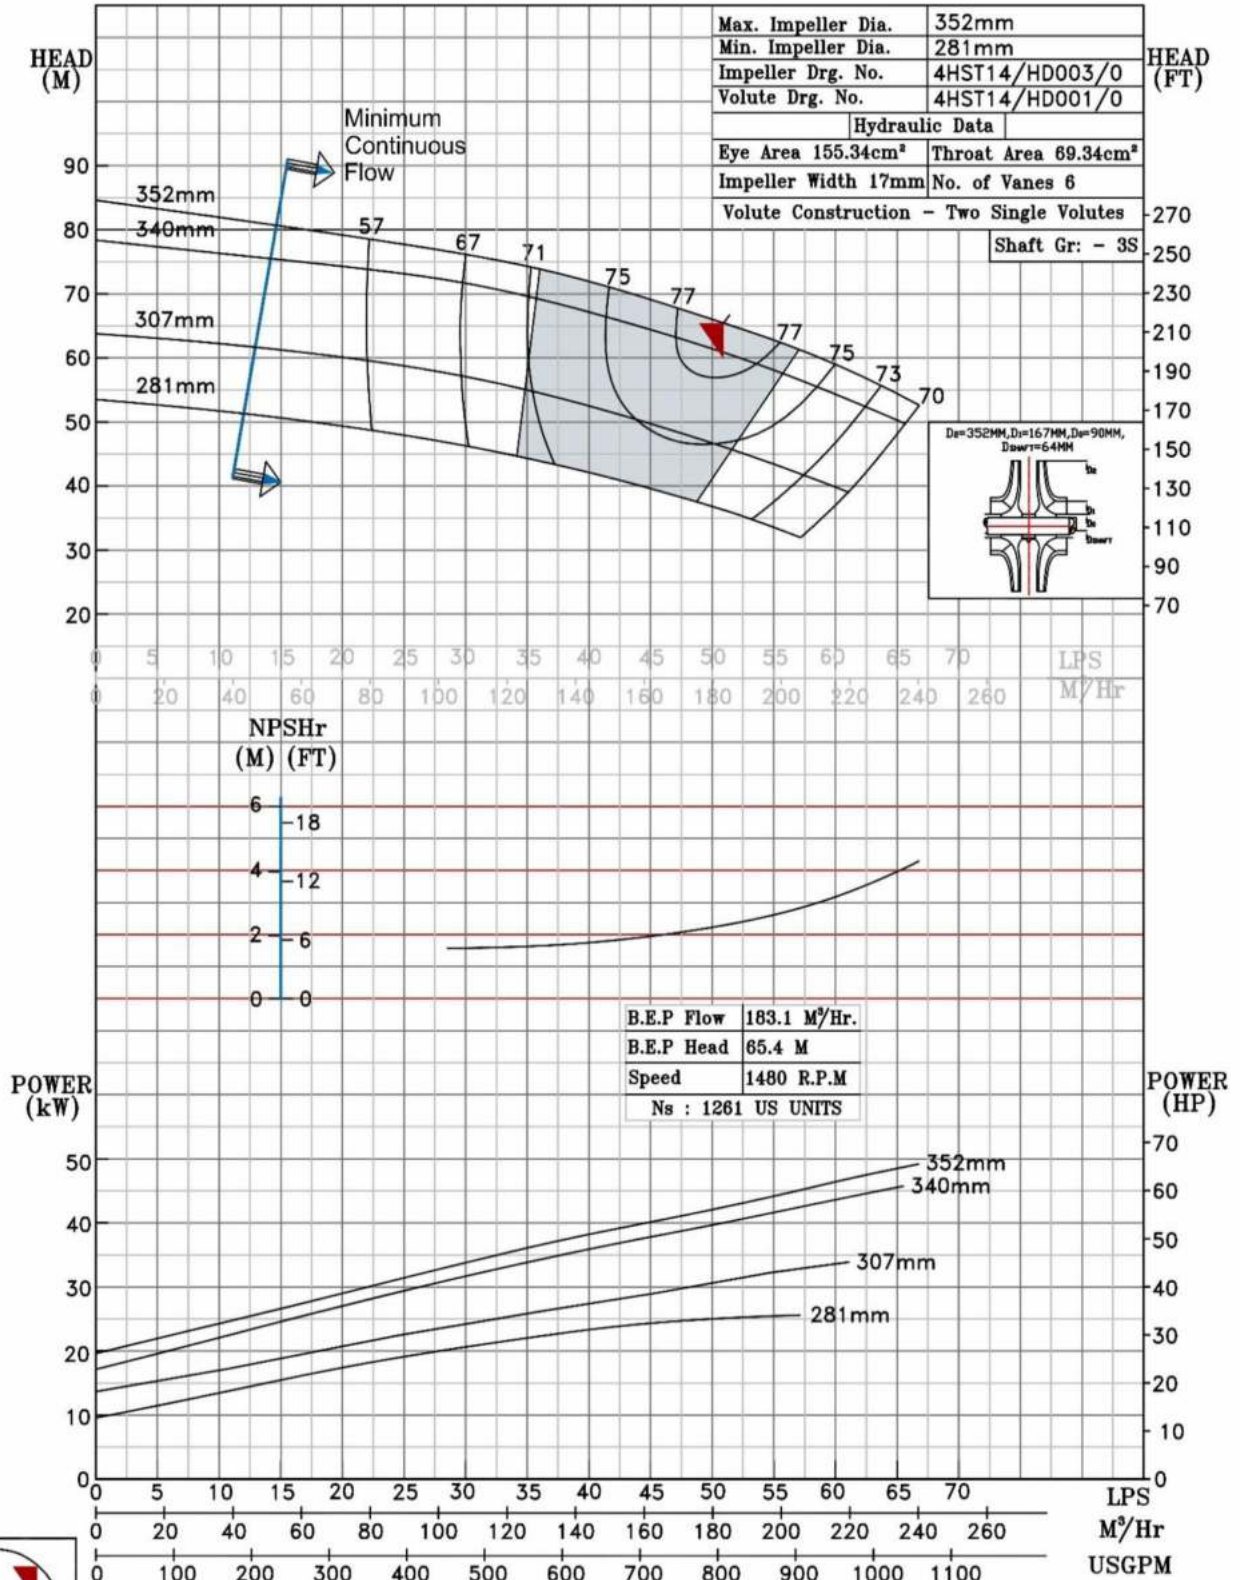

1480 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 4HST16 @1480 R.P.M

4HST16/X/300954

FISHER PUMP

HST RANGE

MODEL 4HST16

WORKING PRESS. 16 bar

SIZE 150x100-415


TEST PRESS. 24 bar

TYPE-AXIALLY SPLIT CASE TWO STAGE

SPEED 1480 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

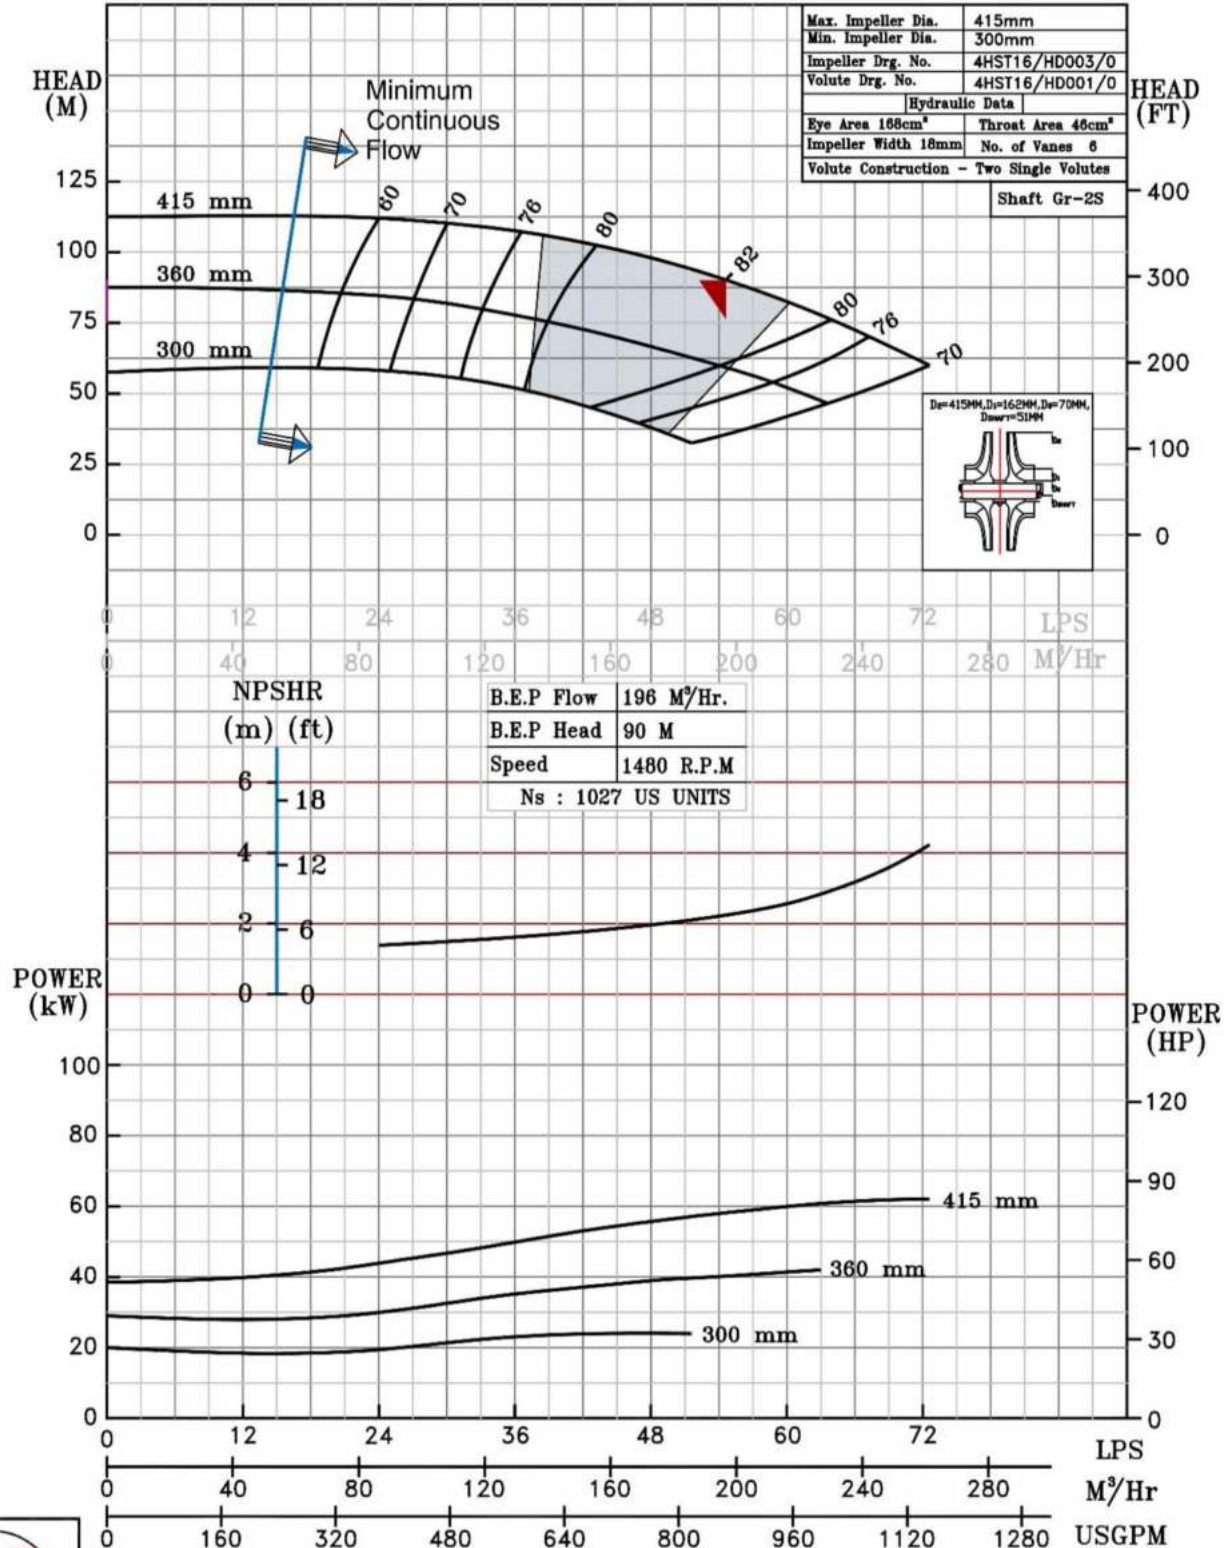


1480 RPM

PERFORMANCE CURVE OF 4HST19 @1480 R.P.M		4HST19/Y/301054	
FISHER PUMP	MODEL 4HST19	WORKING PRESS	30 bar
	SIZE 150x100-470	TEST PRESS.	45 bar
	TYPE-AXIALLY SPLIT CASE TWO STAGE		
HST RANGE		SPEED 1480 rpm	

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

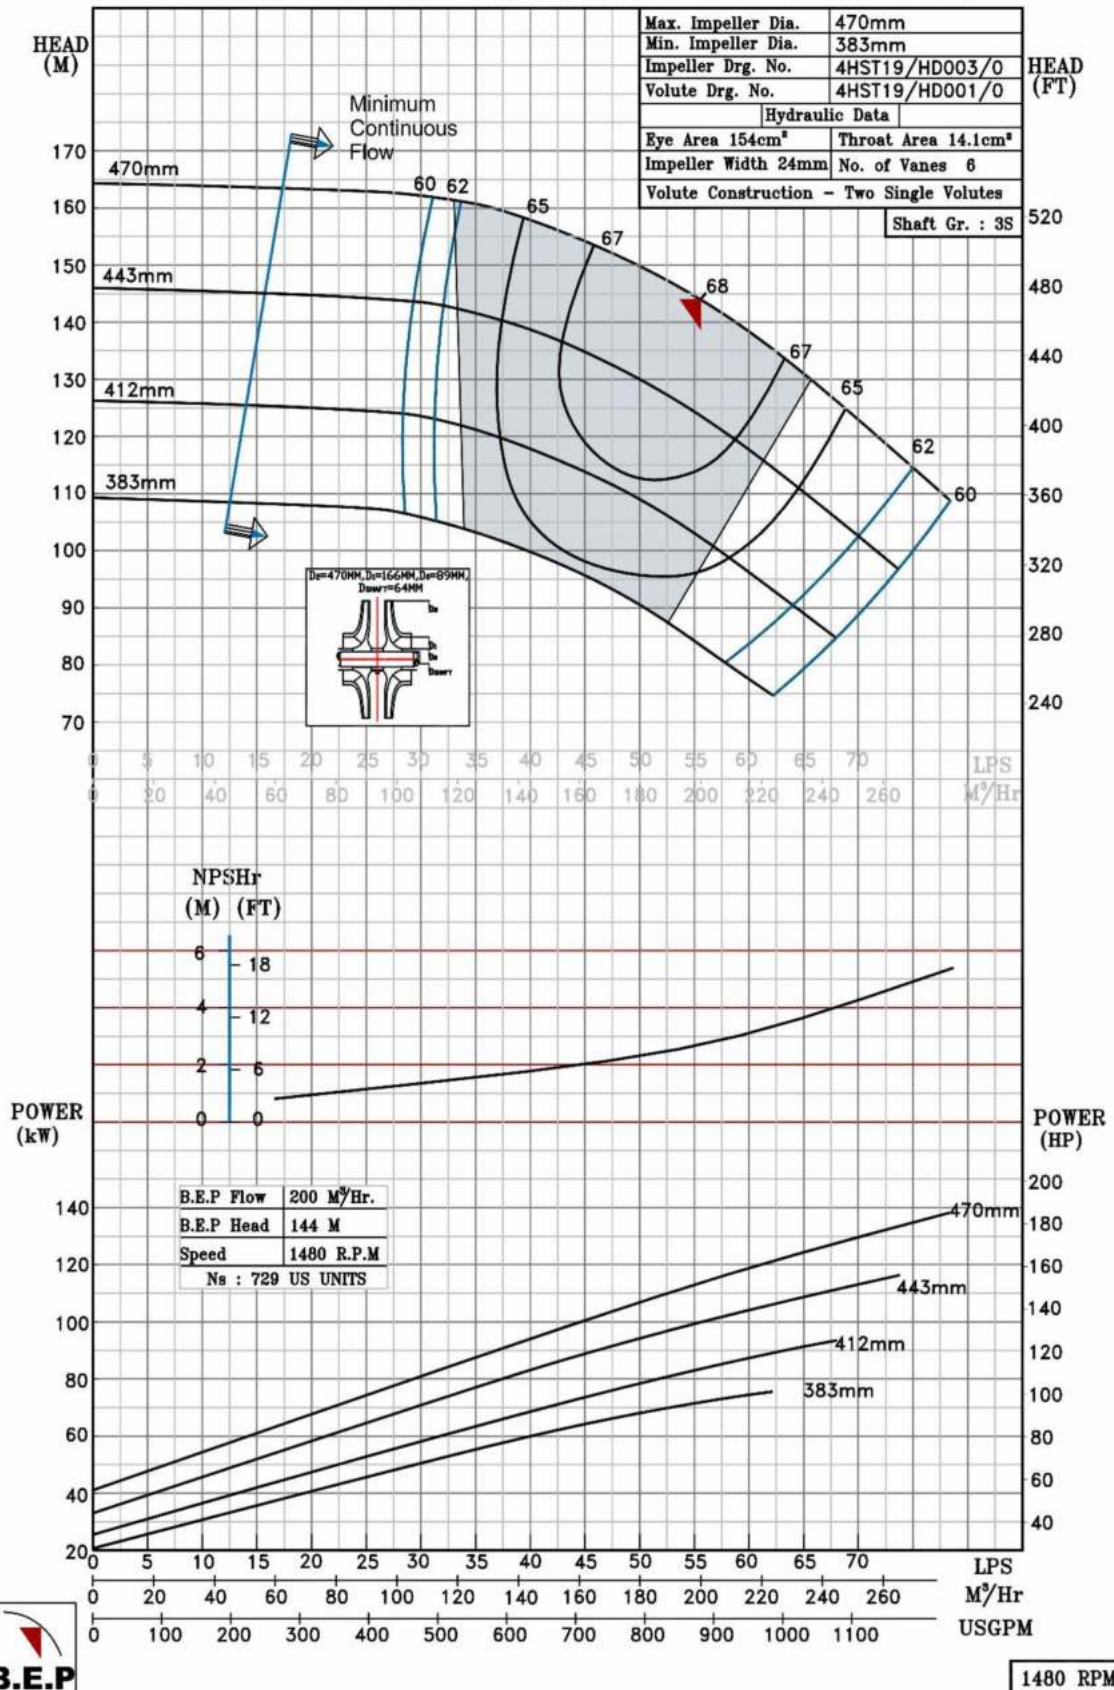

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 5HST14 @1480 R.P.M

5HST14/X/301154


FISHER PUMP

HST RANGE

MODEL 5HST14	WORKING PRESS. 16 bar
SIZE 150x125-360	TEST PRESS. 24 bar
TYPE-AXIALLY SPLIT CASE TWO STAGE	
SPEED 1480 rpm	

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

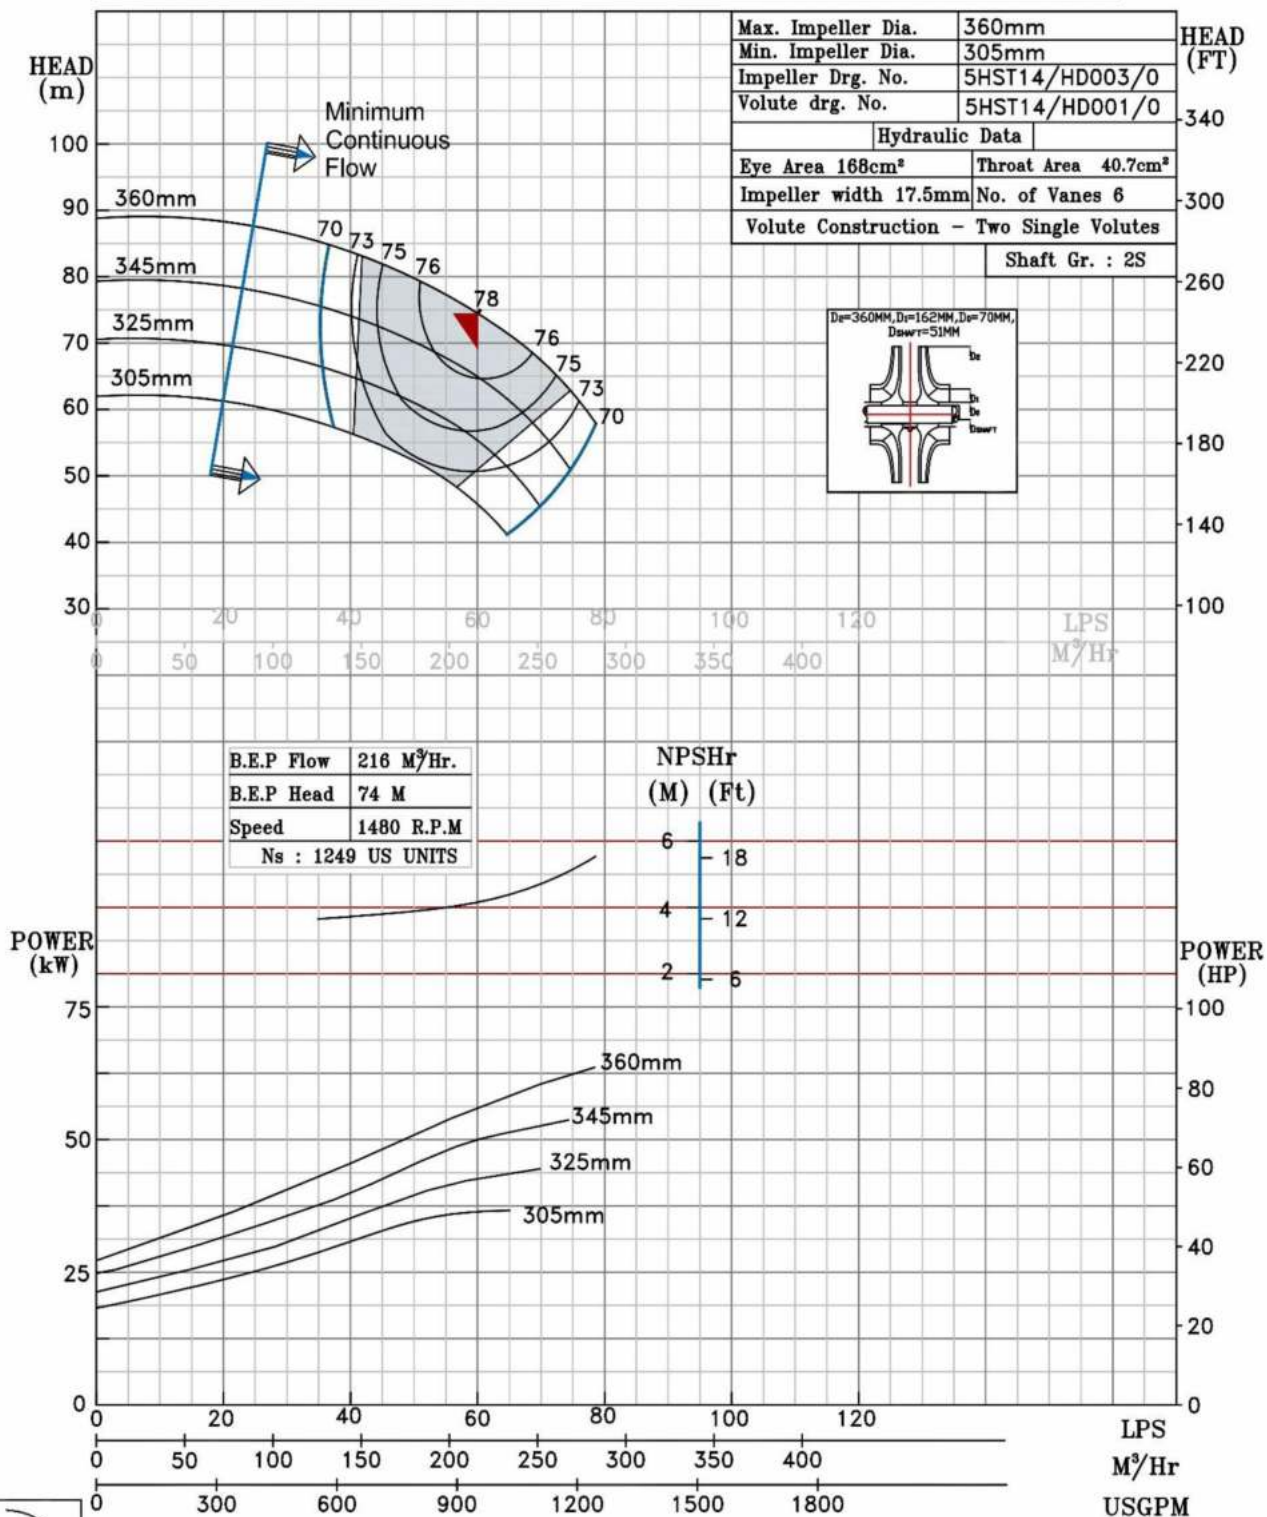

1480 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 6HSTD12 @1480 R.P.M

6HSTD12/X/301354

FISHER PUMP

HST RANGE

MODEL 6HSTD12 WORKING PRESS. 16 bar


SIZE 200x150-295 TEST PRESS. 24 bar

TYPE-AXIALLY SPLIT CASE TWO STAGE

SPEED 1480 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

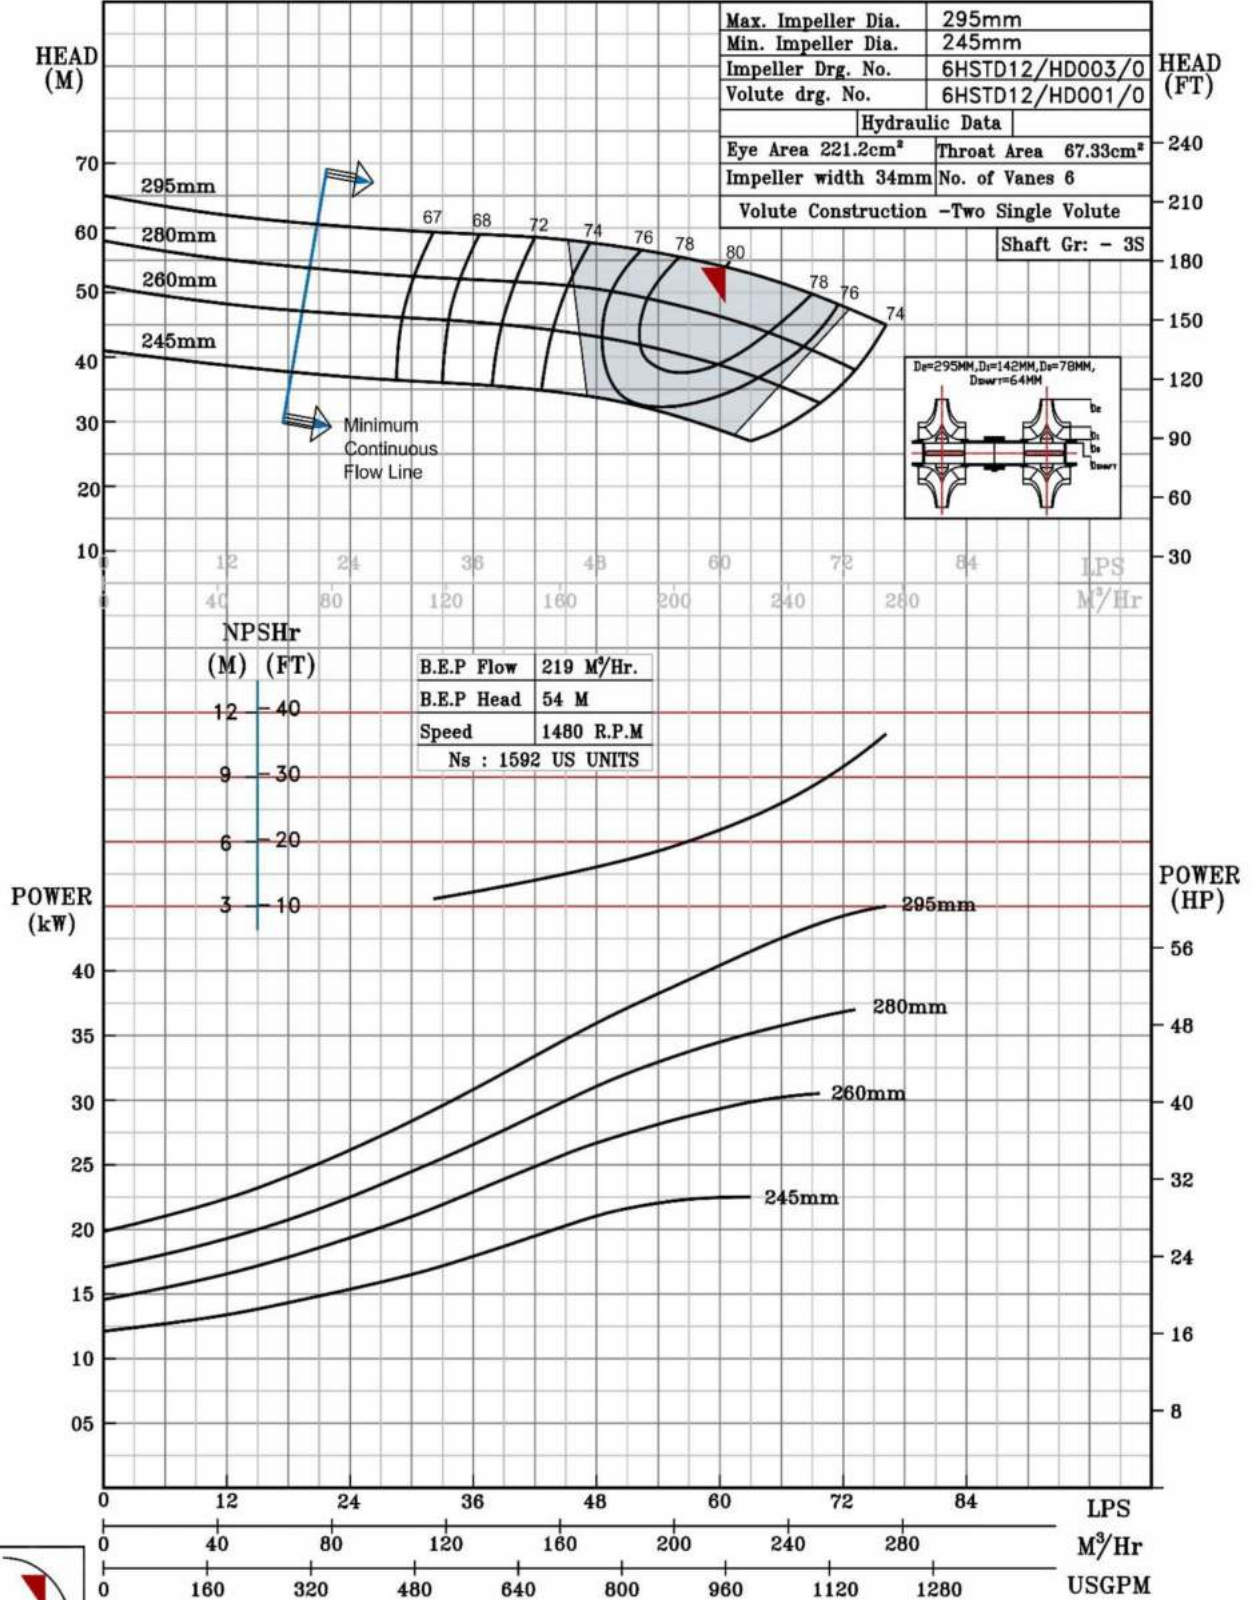

1480 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 6HSTD13 @1465 R.P.M

6HSTD13/X/301454

FISHER PUMP

HST RANGE

MODEL 6HSTD13 WORKING PRESS. 16 bar


SIZE 200x150-334 TEST PRESS. 24 bar

TYPE-AXIALLY SPLIT CASE TWO STAGE

SPEED 1465 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

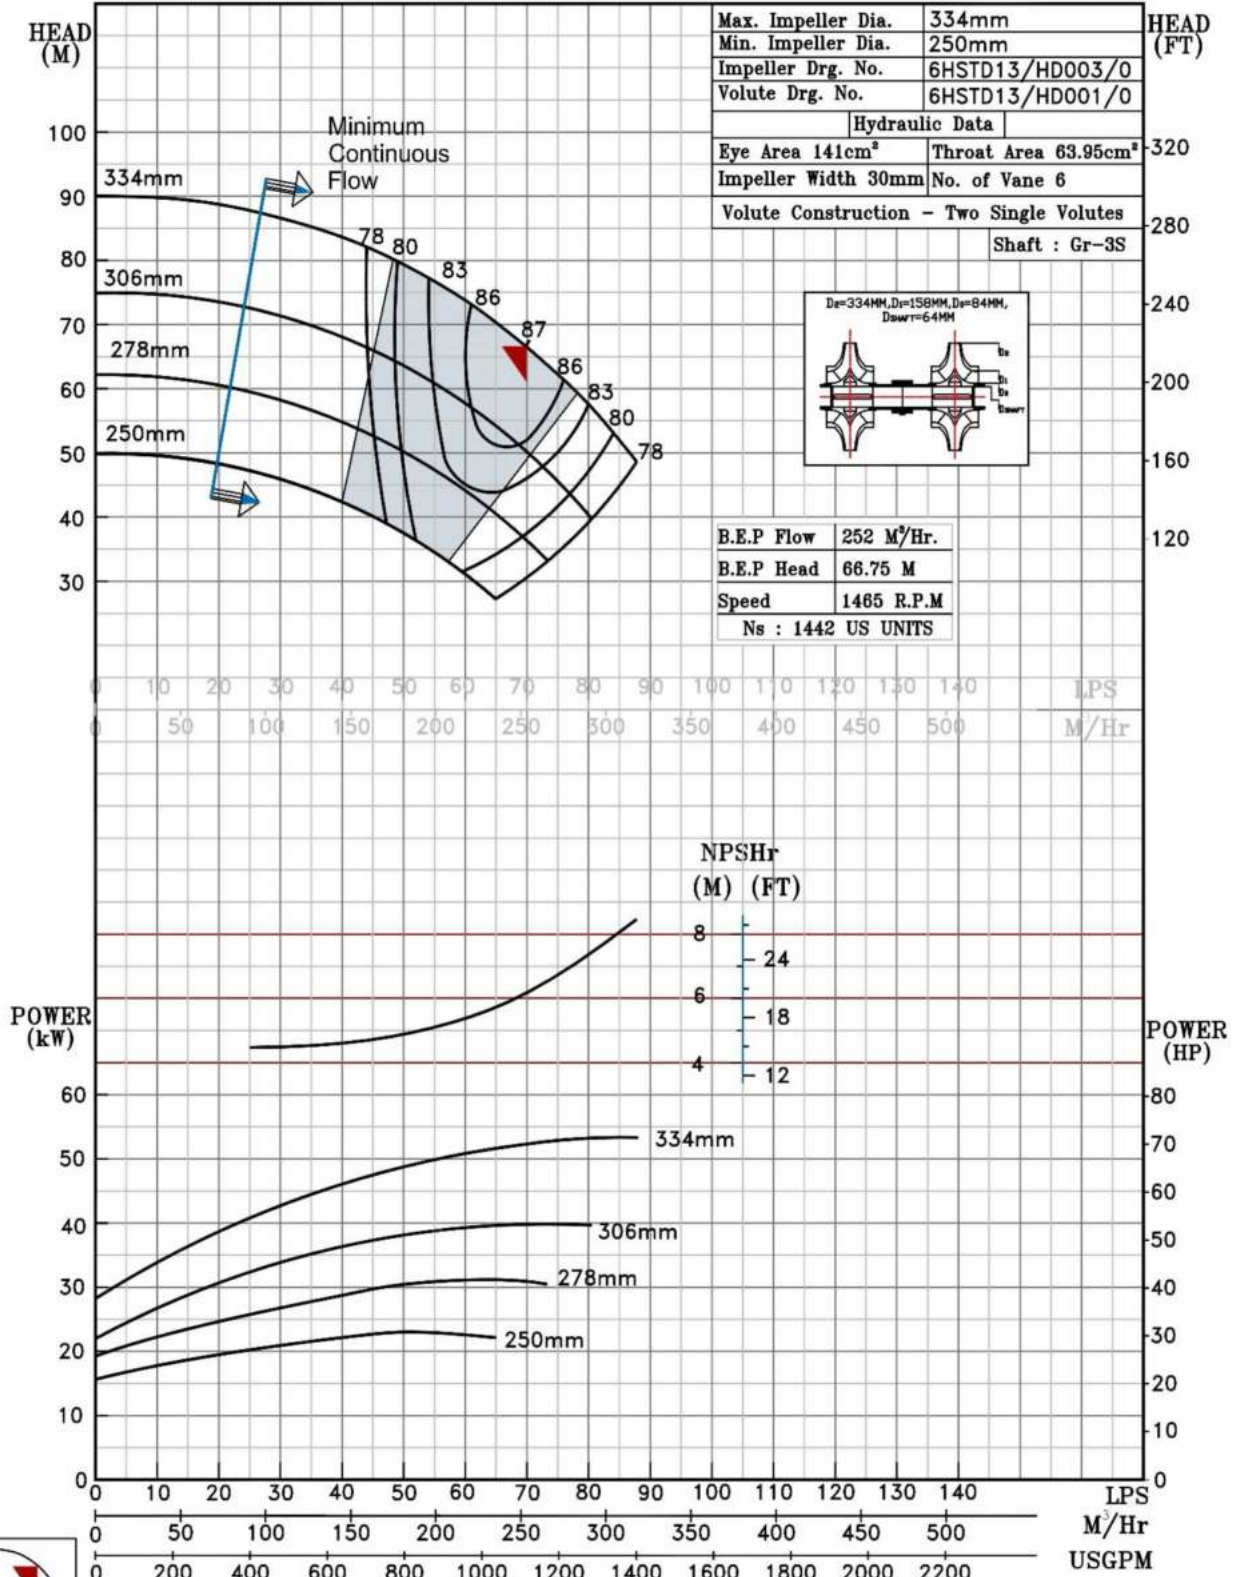

1465 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 6HST18 @1480 R.P.M

6HST18/X/301554

FISHER PUMP

HST RANGE

MODEL 6HST18

WORKING PRESS. 16 bar

SIZE 200x150-460


TEST PRESS. 24 bar

TYPE-AXIALLY SPLIT CASE TWO STAGE

SPEED 1480 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

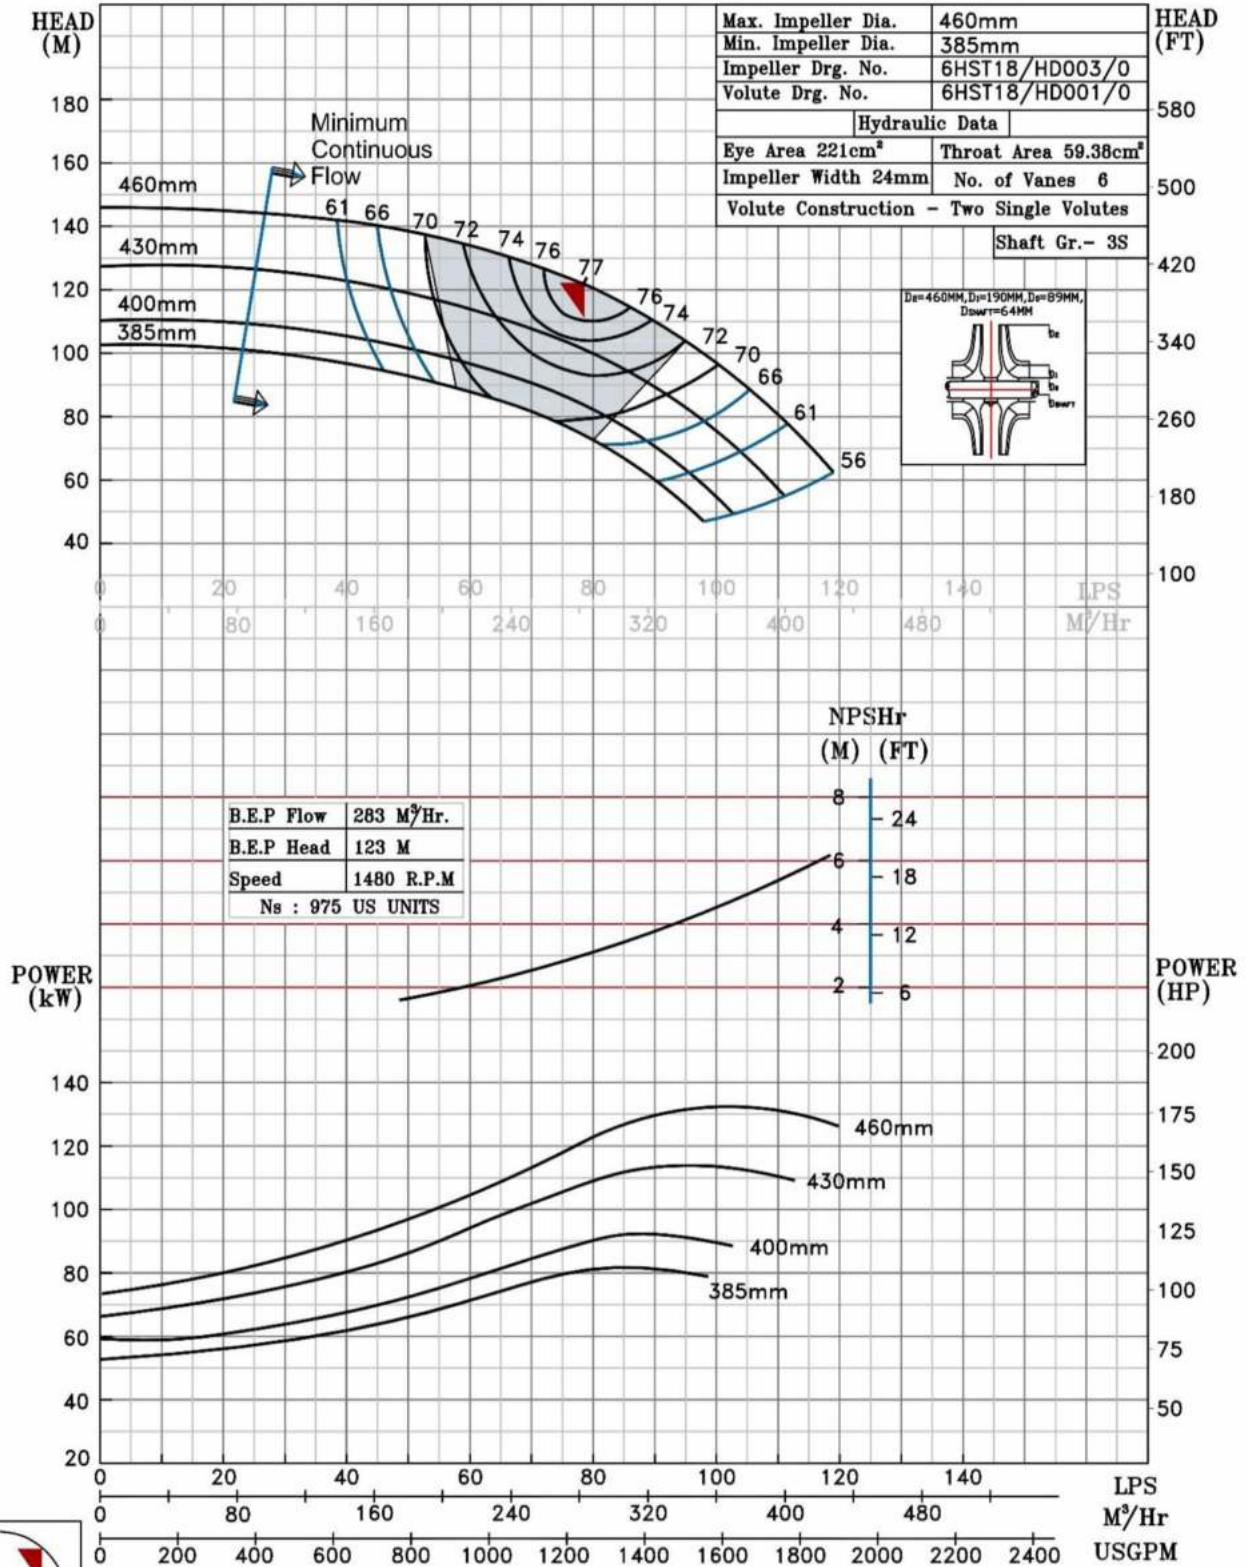

1480 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 6HST19 @1480 R.P.M

6HST19/X/301654

FISHER PUMP

HST RANGE

MODEL 6HST19

WORKING PRESS. 20 bar

SIZE 200x150-484


TEST PRESS. 30 bar

TYPE-AXIALLY SPLIT CASE TWO STAGE

SPEED 1480 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

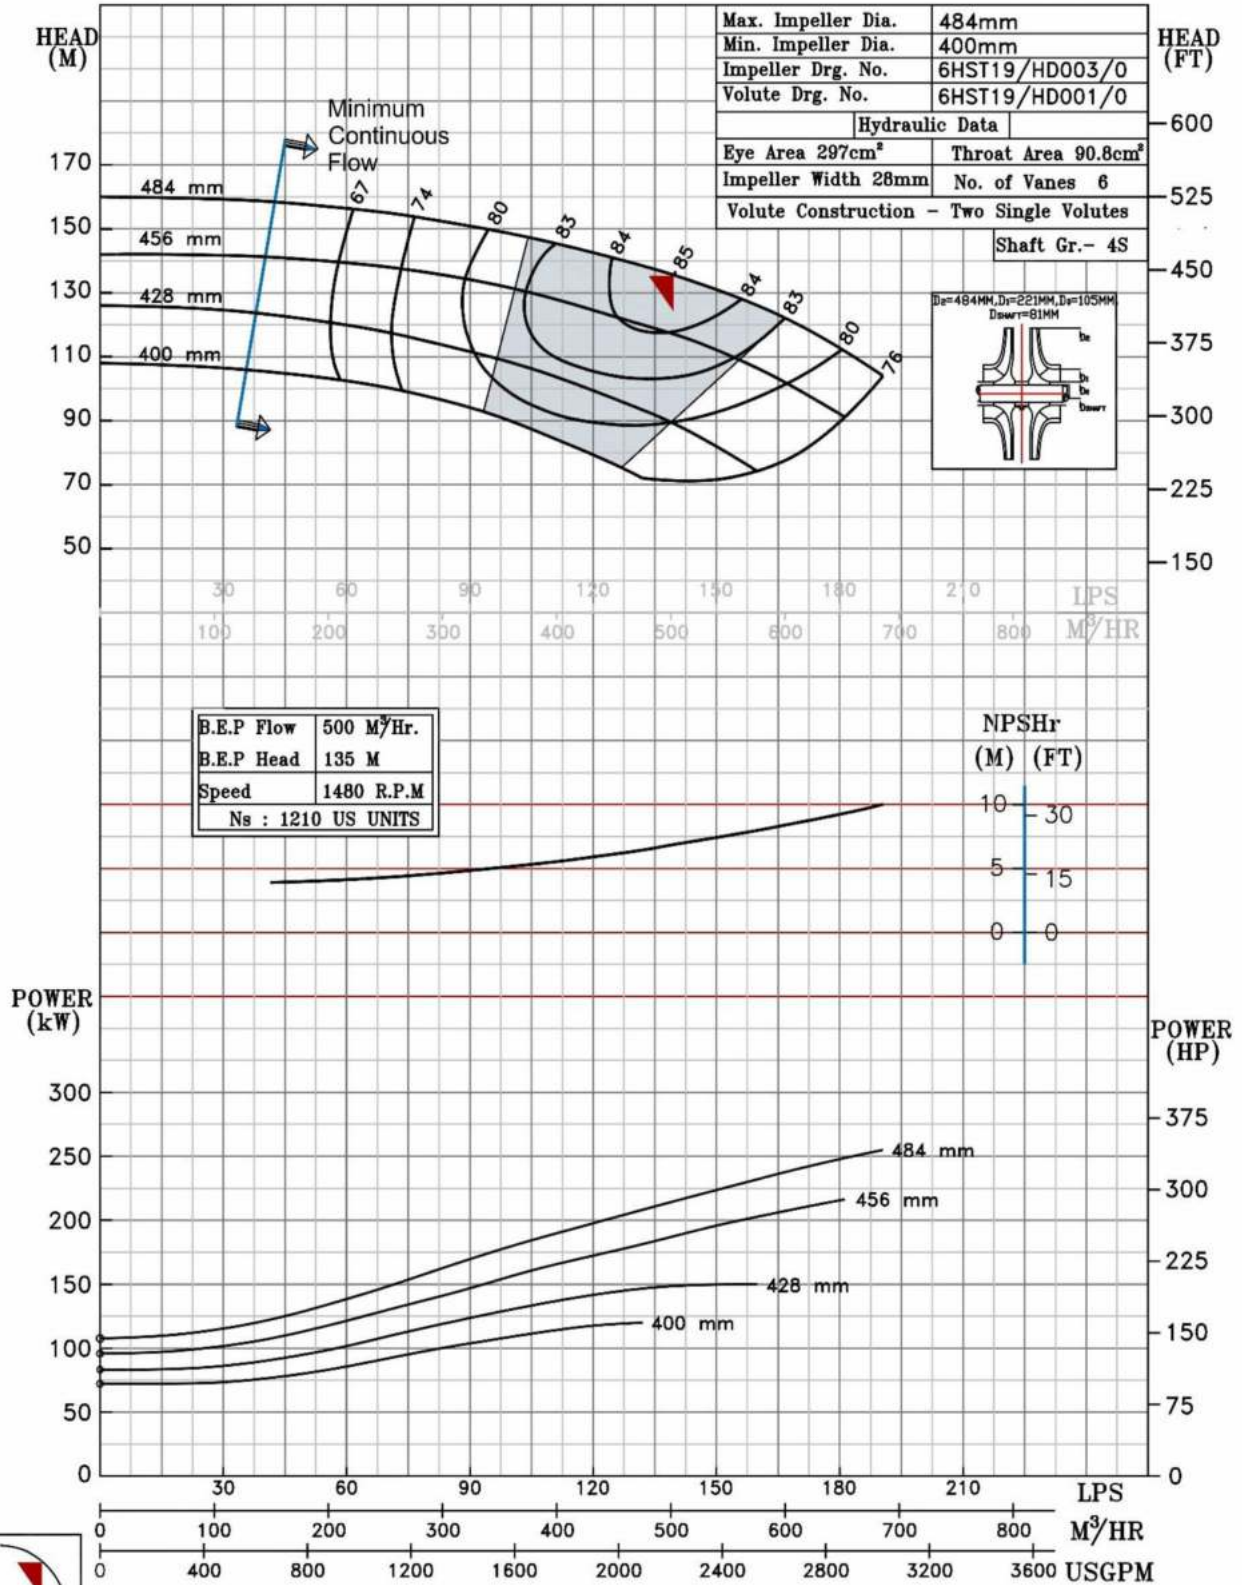

1480 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 6HSTD21 @1480 R.P.M

6HSTD21/X/301754

FISHER PUMP

HST RANGE

MODEL 6HSTD21

WORKING PRESS. 20 bar

SIZE 200x150-530


TEST PRESS. 30 bar

TYPE-AXIALY SPLIT CASE TWO STAGE

SPEED 1480 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

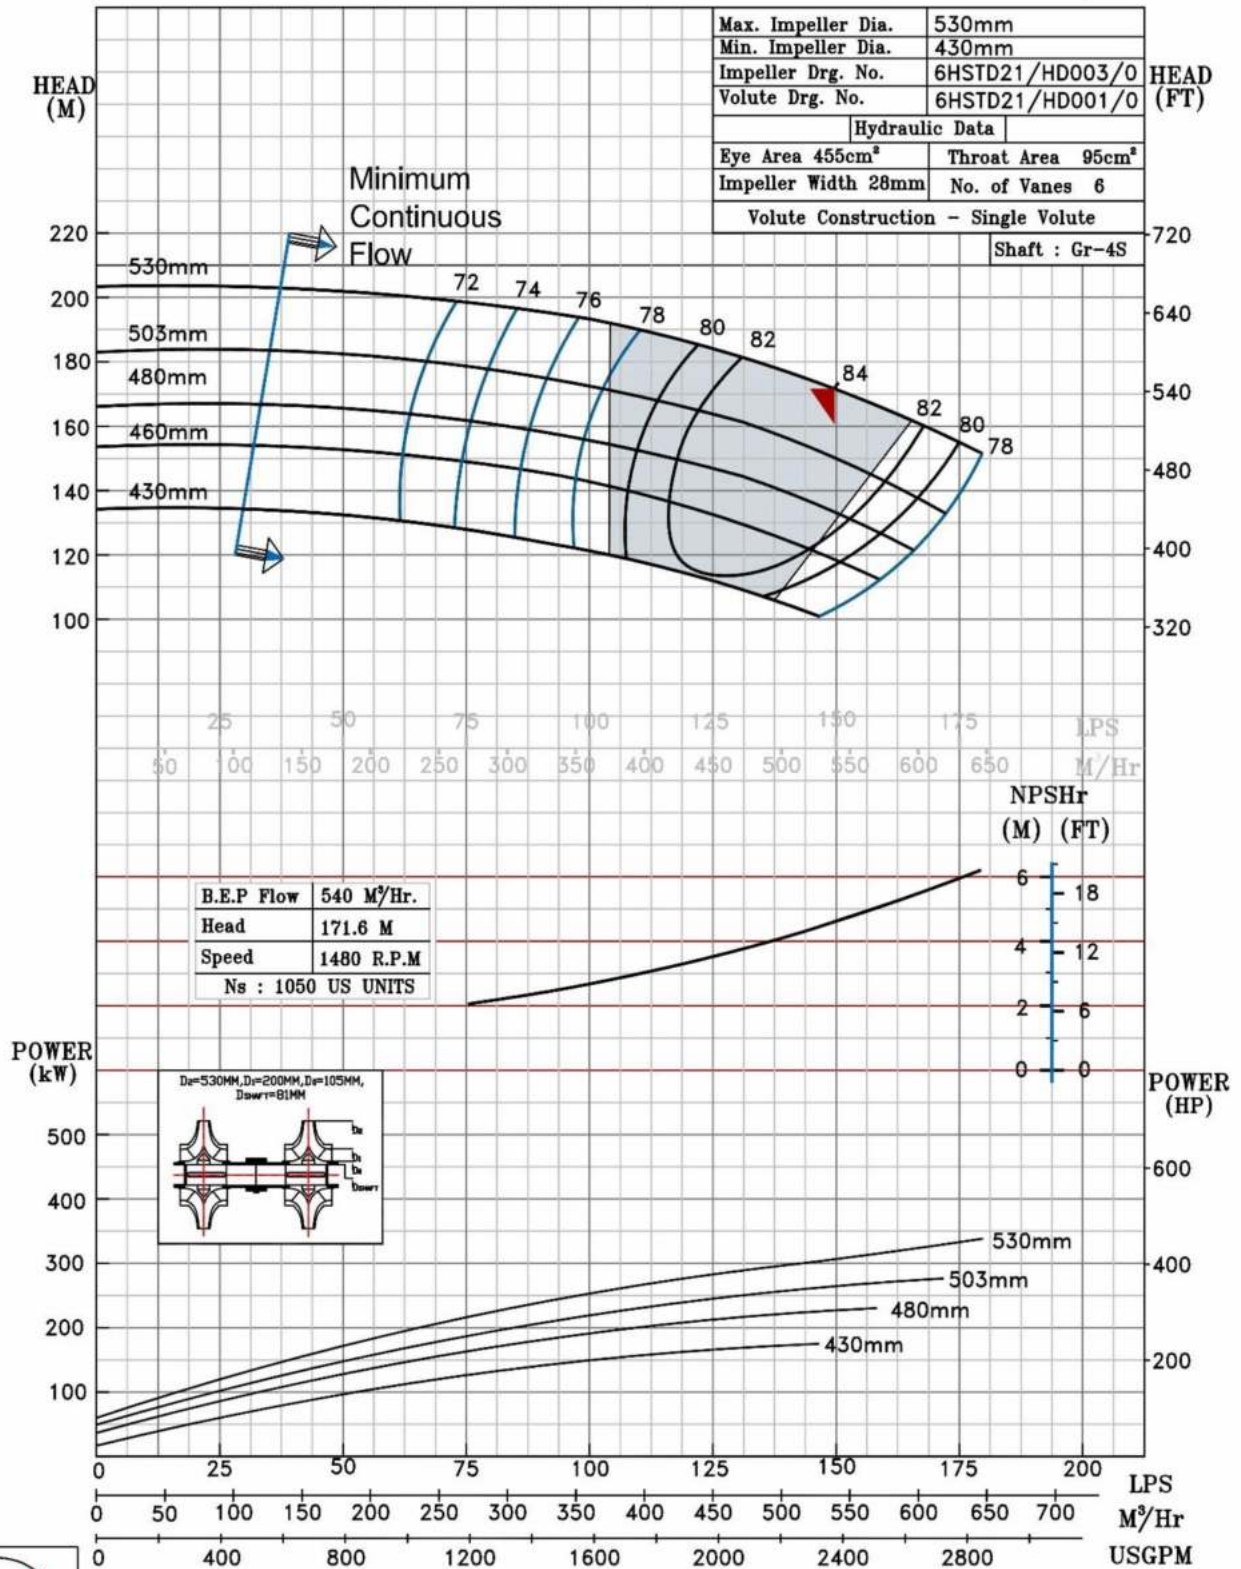

1480 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 6HST24 @1480 R.P.M

6HST24/Y/301854

FISHER PUMP

HST RANGE

MODEL 6HST24

WORKING PRESS. 30 bar

SIZE 200x150-600


TEST PRESS. 45 bar

TYPE-AXIALLY SPLIT CASE TWO STAGE

SPEED 1480 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G. 1.0

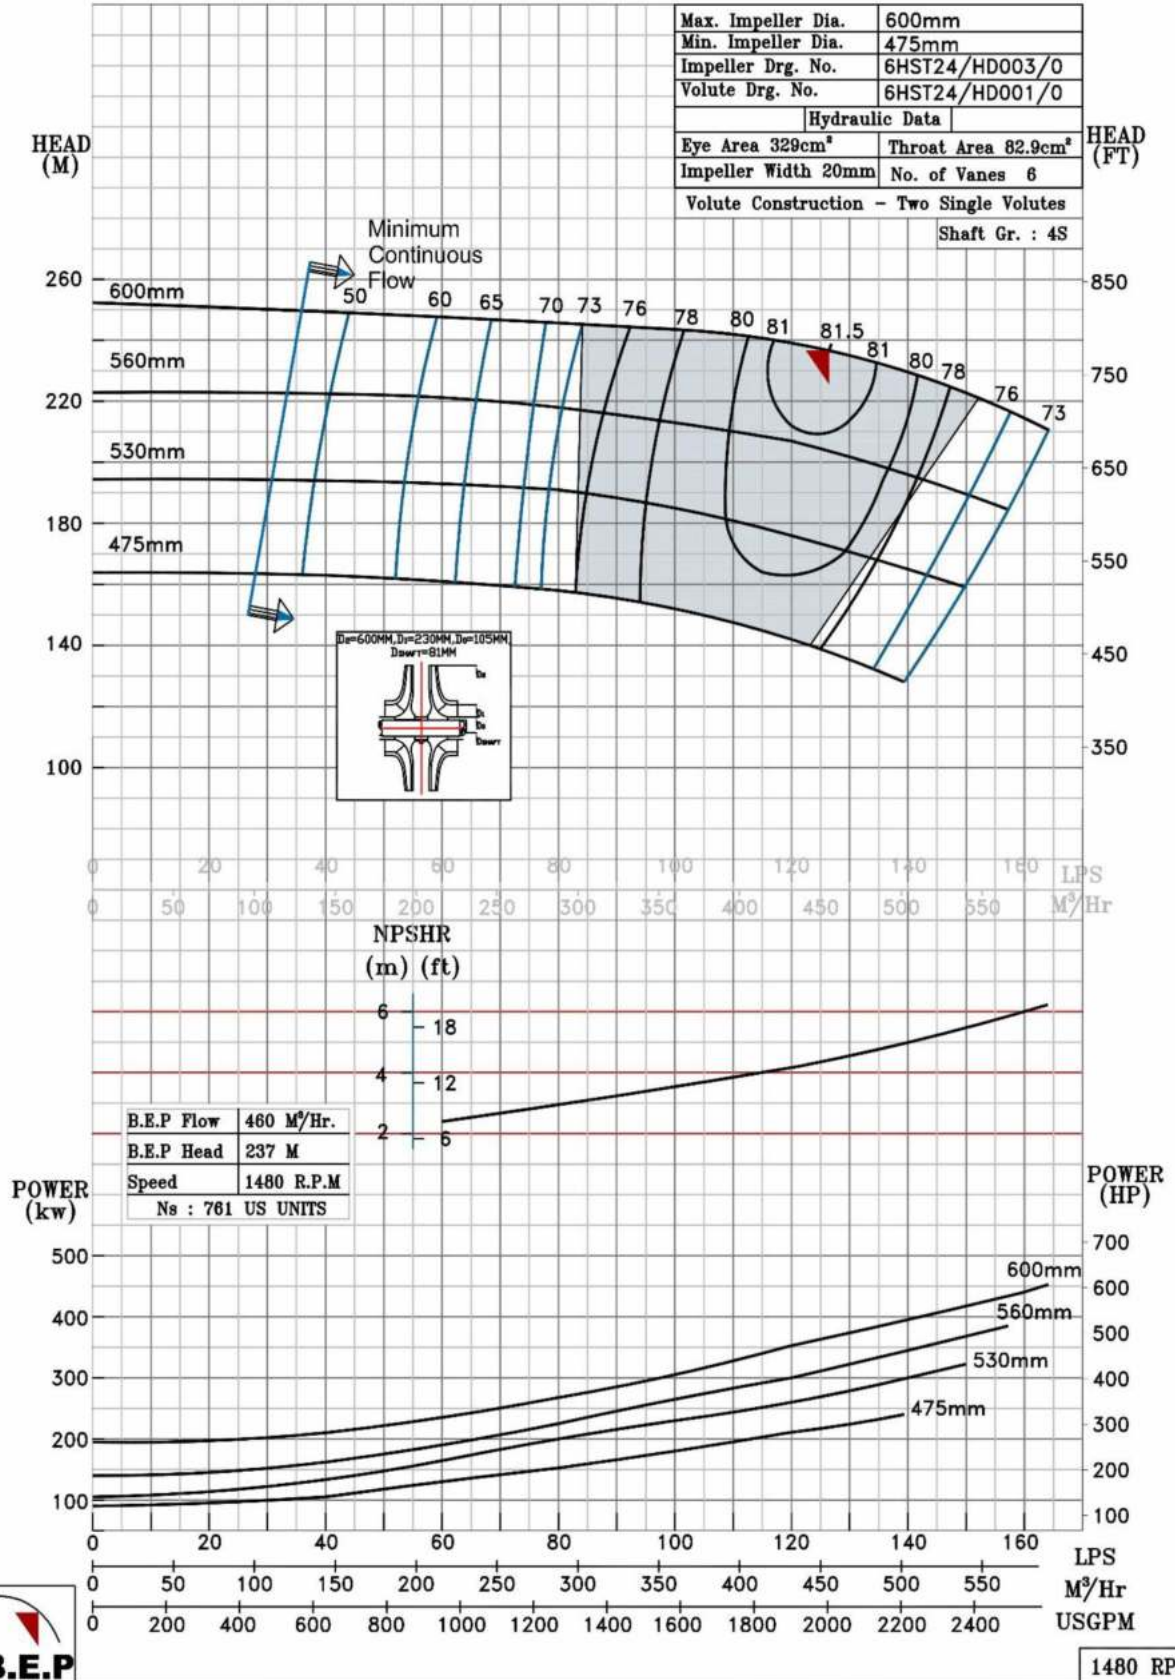

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 8HST21 @1480 R.P.M

8HST21/X/301954

FISHER PUMP

HST RANGE

MODEL 8HST21

WORKING PRESS. 20 bar

SIZE 250x200-535


TEST PRESS. 30 bar

TYPE-AXIALLY SPLIT CASE TWO STAGE

SPEED 1480 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

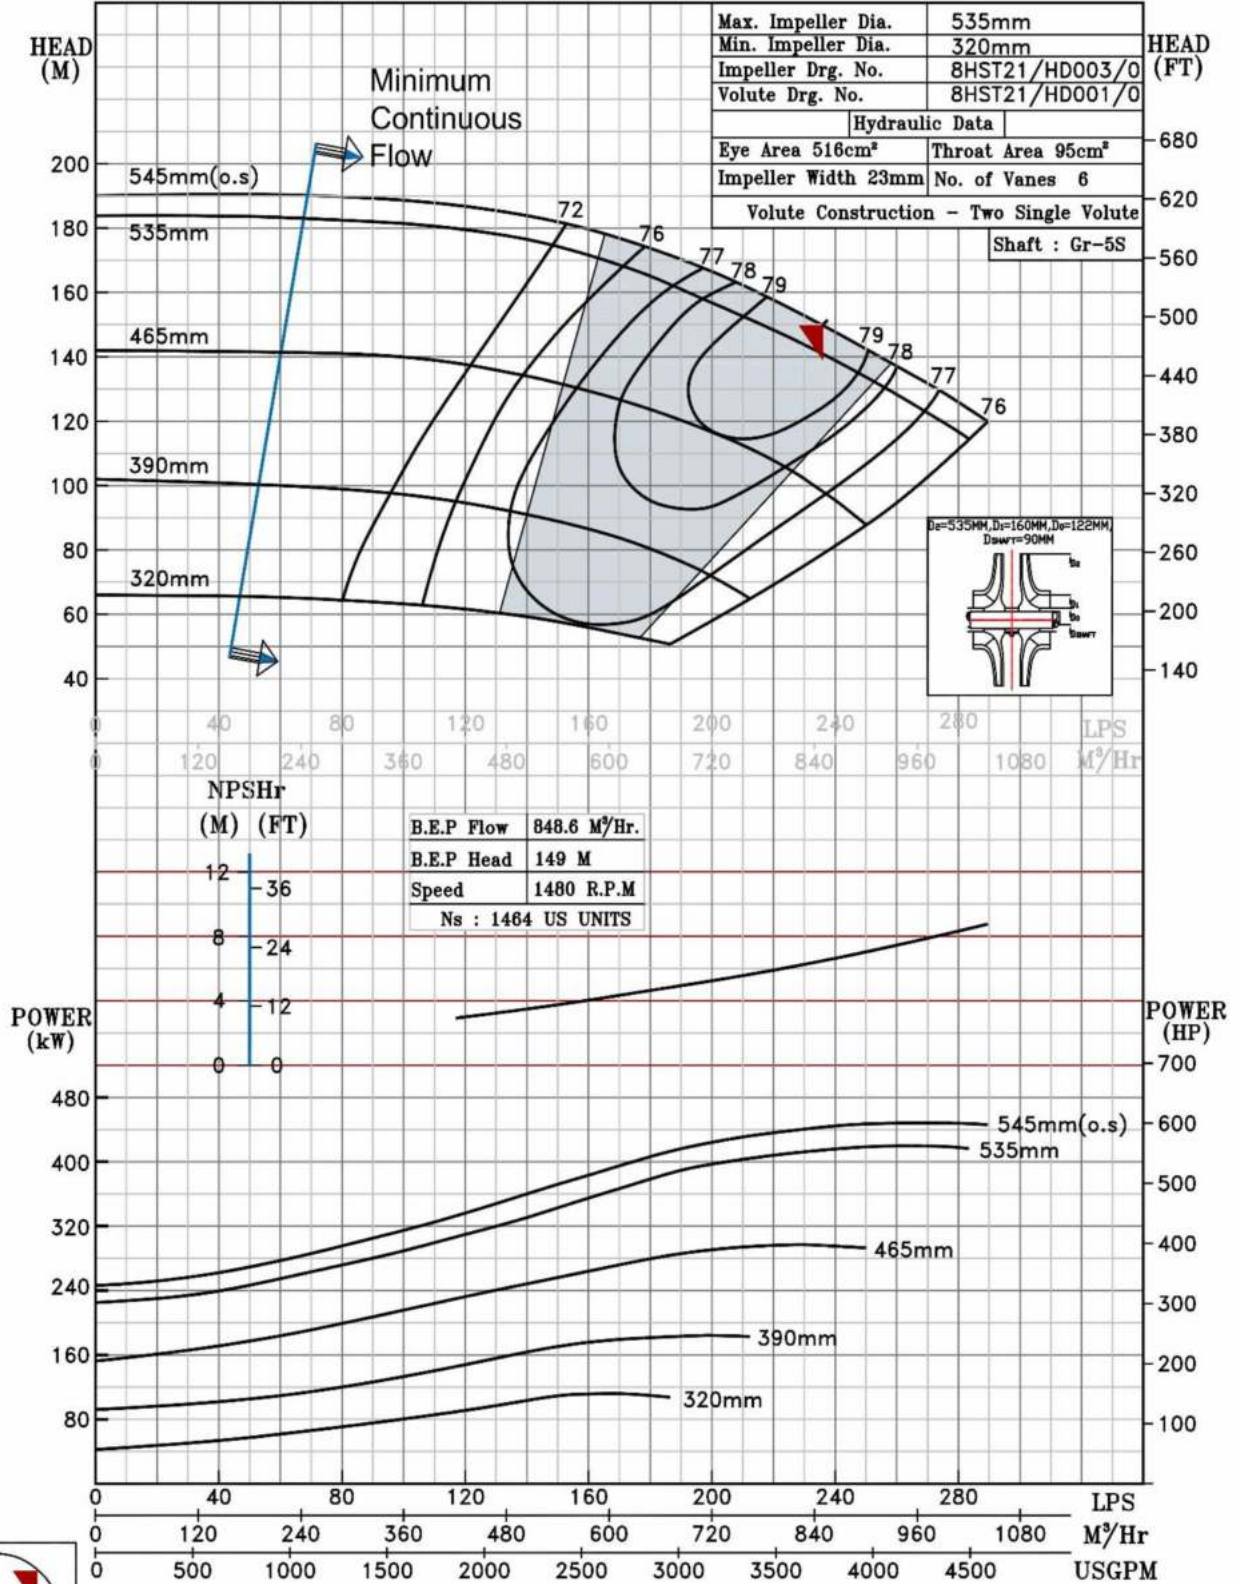


1480 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B		
PERFORMANCE CURVE OF 8HSTD22 @1480 R.P.M		8HSTD22/Y/302054
FISHER PUMP	MODEL 8HSTD22	WORKING PRESS. 25 bar
	SIZE 250x200-556	TEST PRESS. 37.5 bar
	TYPE-AXIALLY SPLIT CASE TWO STAGE	
HST RANGE	SPEED 1480 rpm	

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

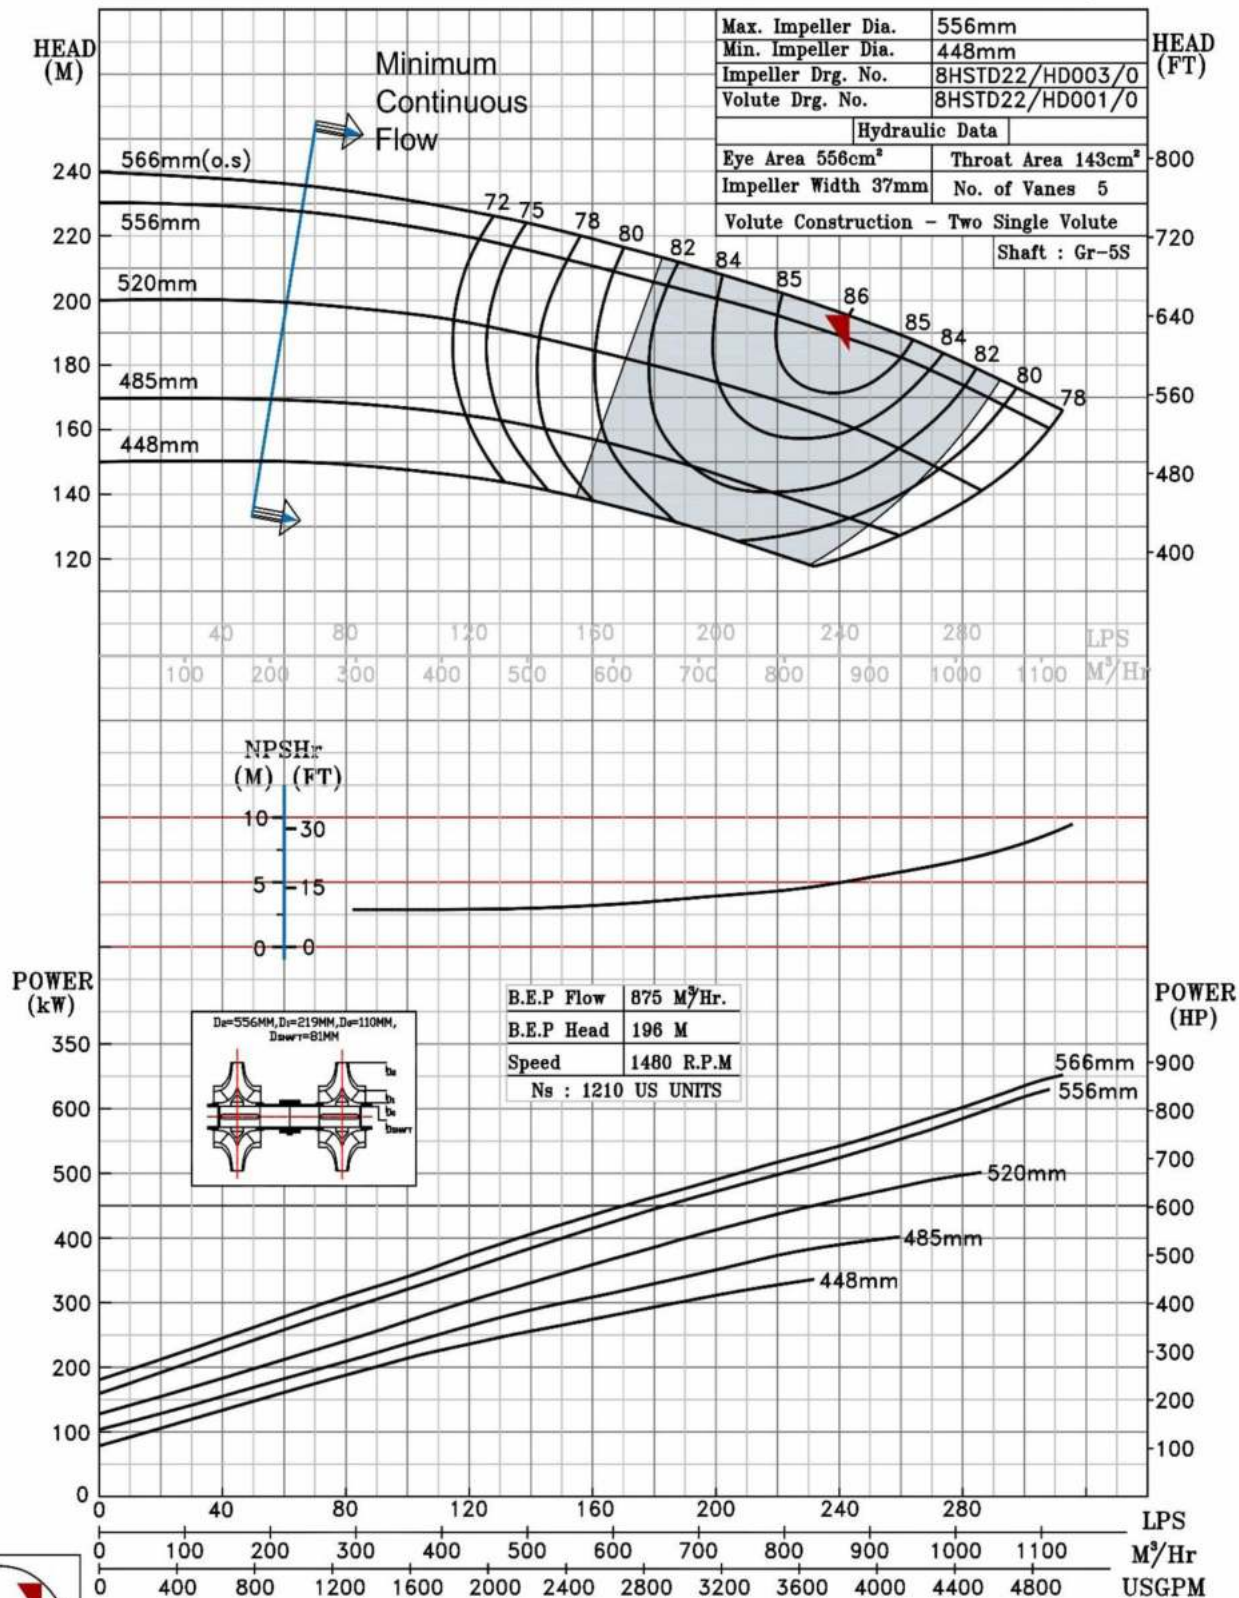


1480 PDM

PERFORMANCE CURVE OF 8HSTD26 @1480 R.P.M		8HSTD26/X/302154
FISHER PUMP	MODEL 8HSTD26	WORKING PRESS. 35 bar
	SIZE 250x200-662	TEST PRESS. 52.5 bar
	TYPE-AXIALLY SPLIT CASE TWO STAGE	
HST RANGE		SPEED 1480 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G. 1.0

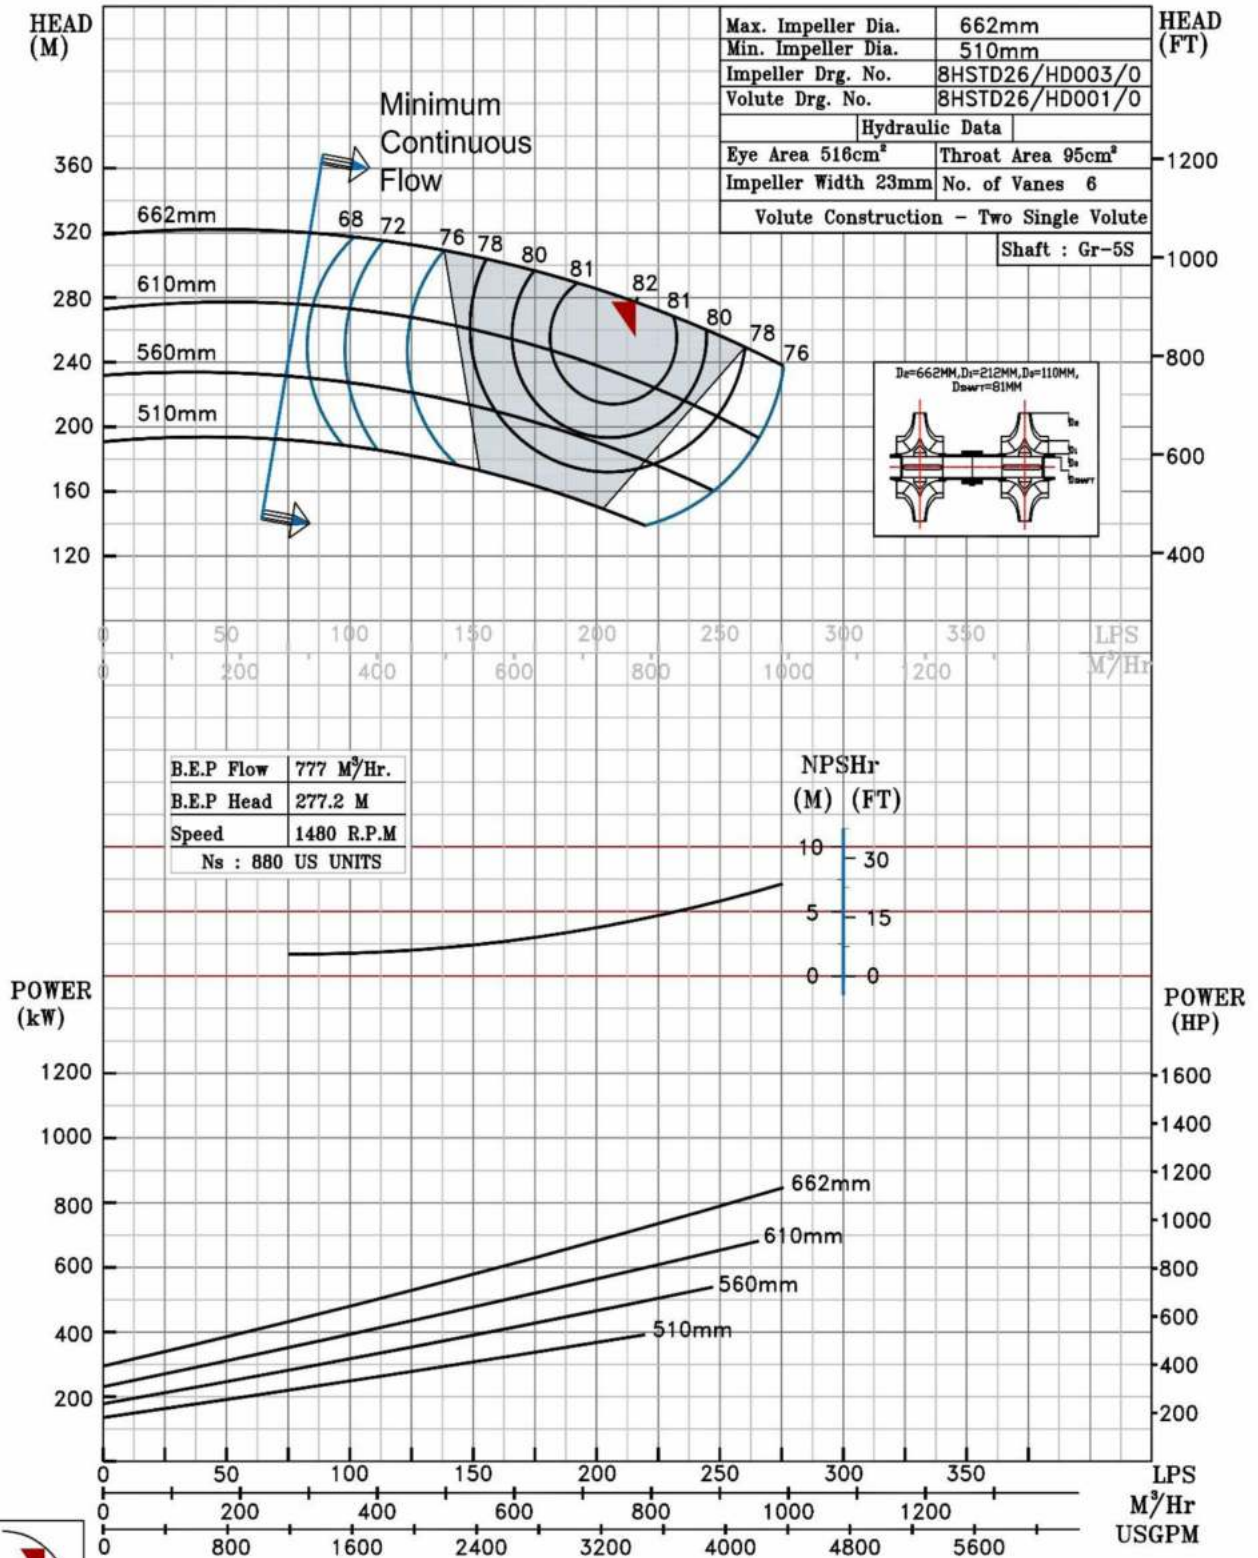

1480 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 10HST22 @1480 R.P.M

10HST22/X/302254

FISHER PUMP

HST RANGE

MODEL 10HST22	WORKING PRESS. 40 bar
SIZE 300x250-560	TEST PRESS. 60 bar
TYPE-AXIALLY SPLIT CASE TWO STAGE	
SPEED 1480 rpm	

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PERFORMANCE CHARACTERISTICS BASED UPON CLEAN COLD WATER - ADD 0.5m TO NPSHR FOR SAFETY

