

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 2.5HFT9 @2950 R.P.M

2.5HFT9/X/900152


FISHER PUMP

HFT RANGE

RATED CAPACITY - 130 USGPM


MODEL 2.5HFT9	WORKING PRESS. 16 bar
SIZE 80x65-220	TEST PRESS. 24 bar
TYPE-AXIALLY SPLIT CASE TWO STAGE	
SPEED 2950 rpm	

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G. 1.0

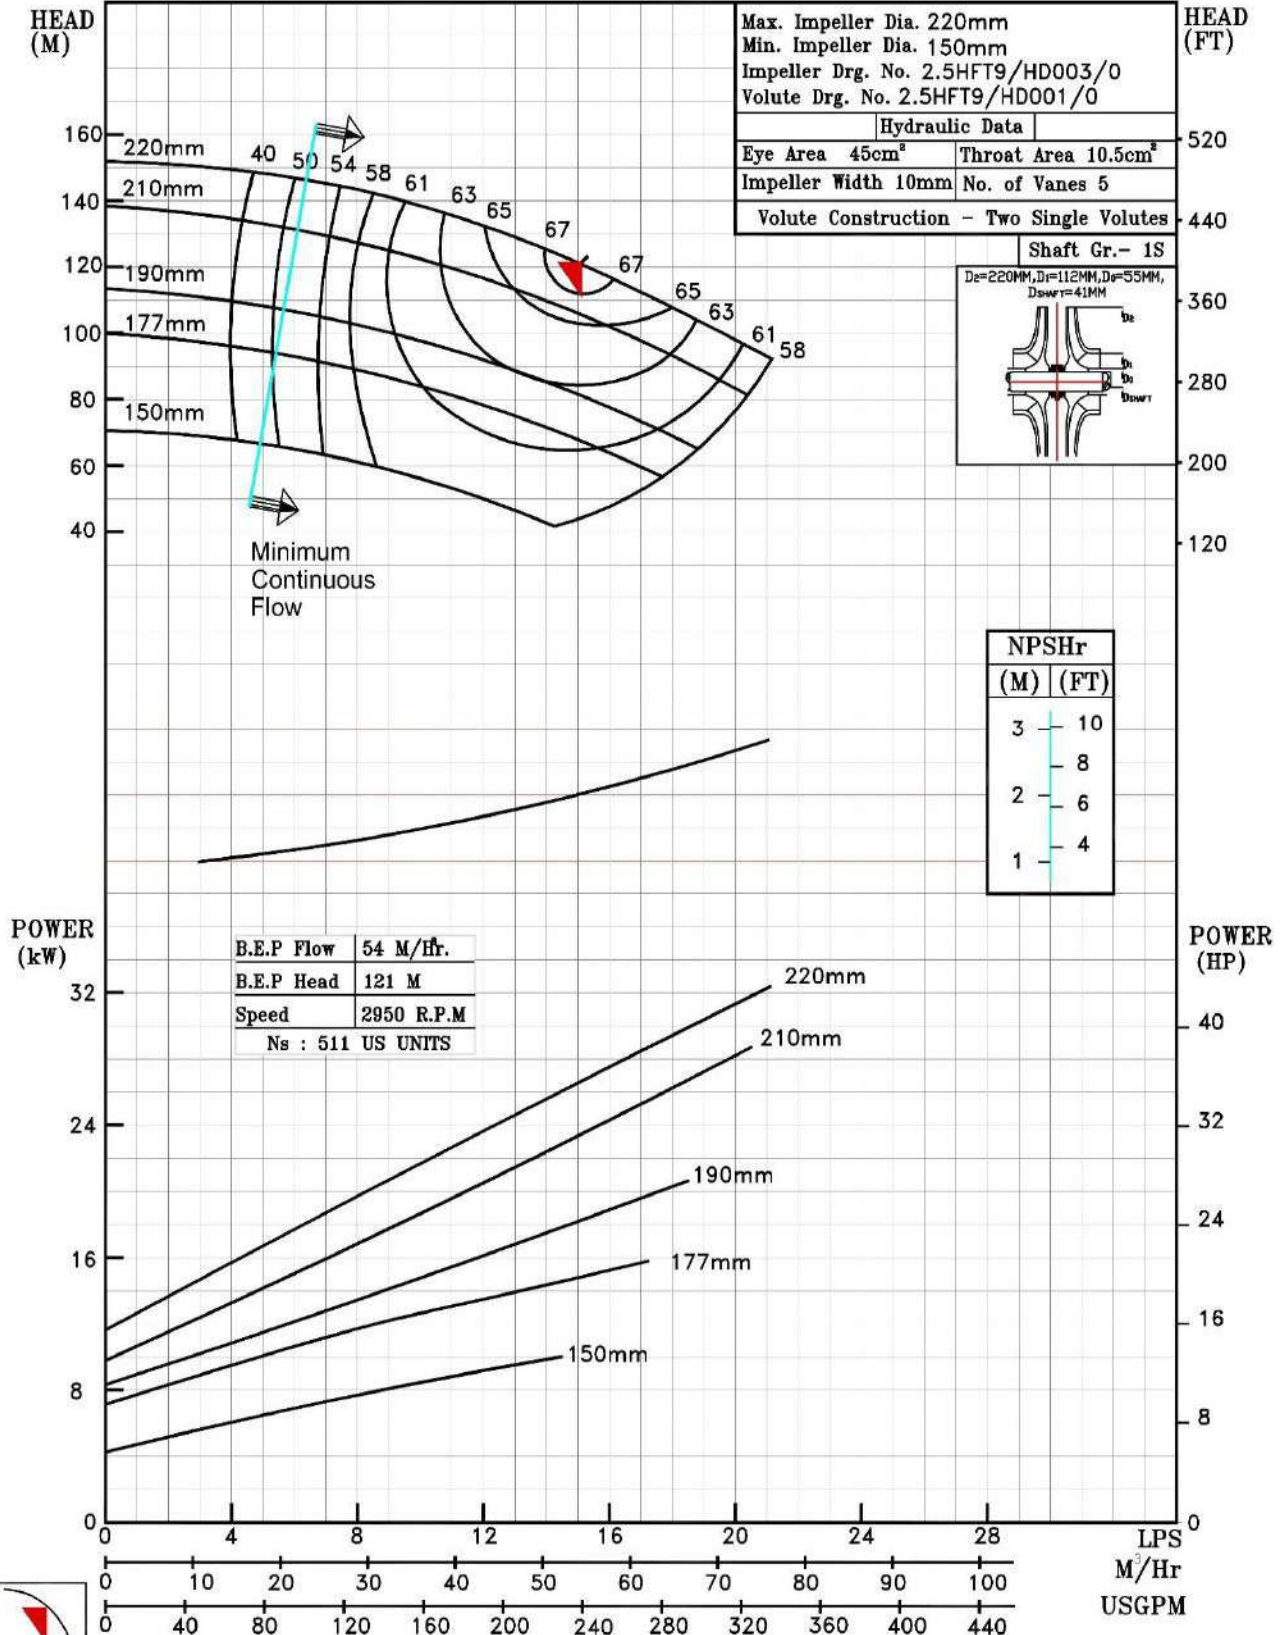

2950 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B	
PERFORMANCE CURVE OF 3HFT11 @2930 R.P.M	
FISHER PUMP HFT RANGE	3HFT11/Y/910252
	MODEL 3HFT11 WORKING PRESS. 350 PSI
	SIZE 100x80-295 TEST PRESS. 520 PSI
	TYPE-AXIALLY SPLIT CASE TWO STAGE
RATED CAPACITY - 400 & 500 USGPM	SPEED 2930rpm
PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0	
DATE - 23.02.19	

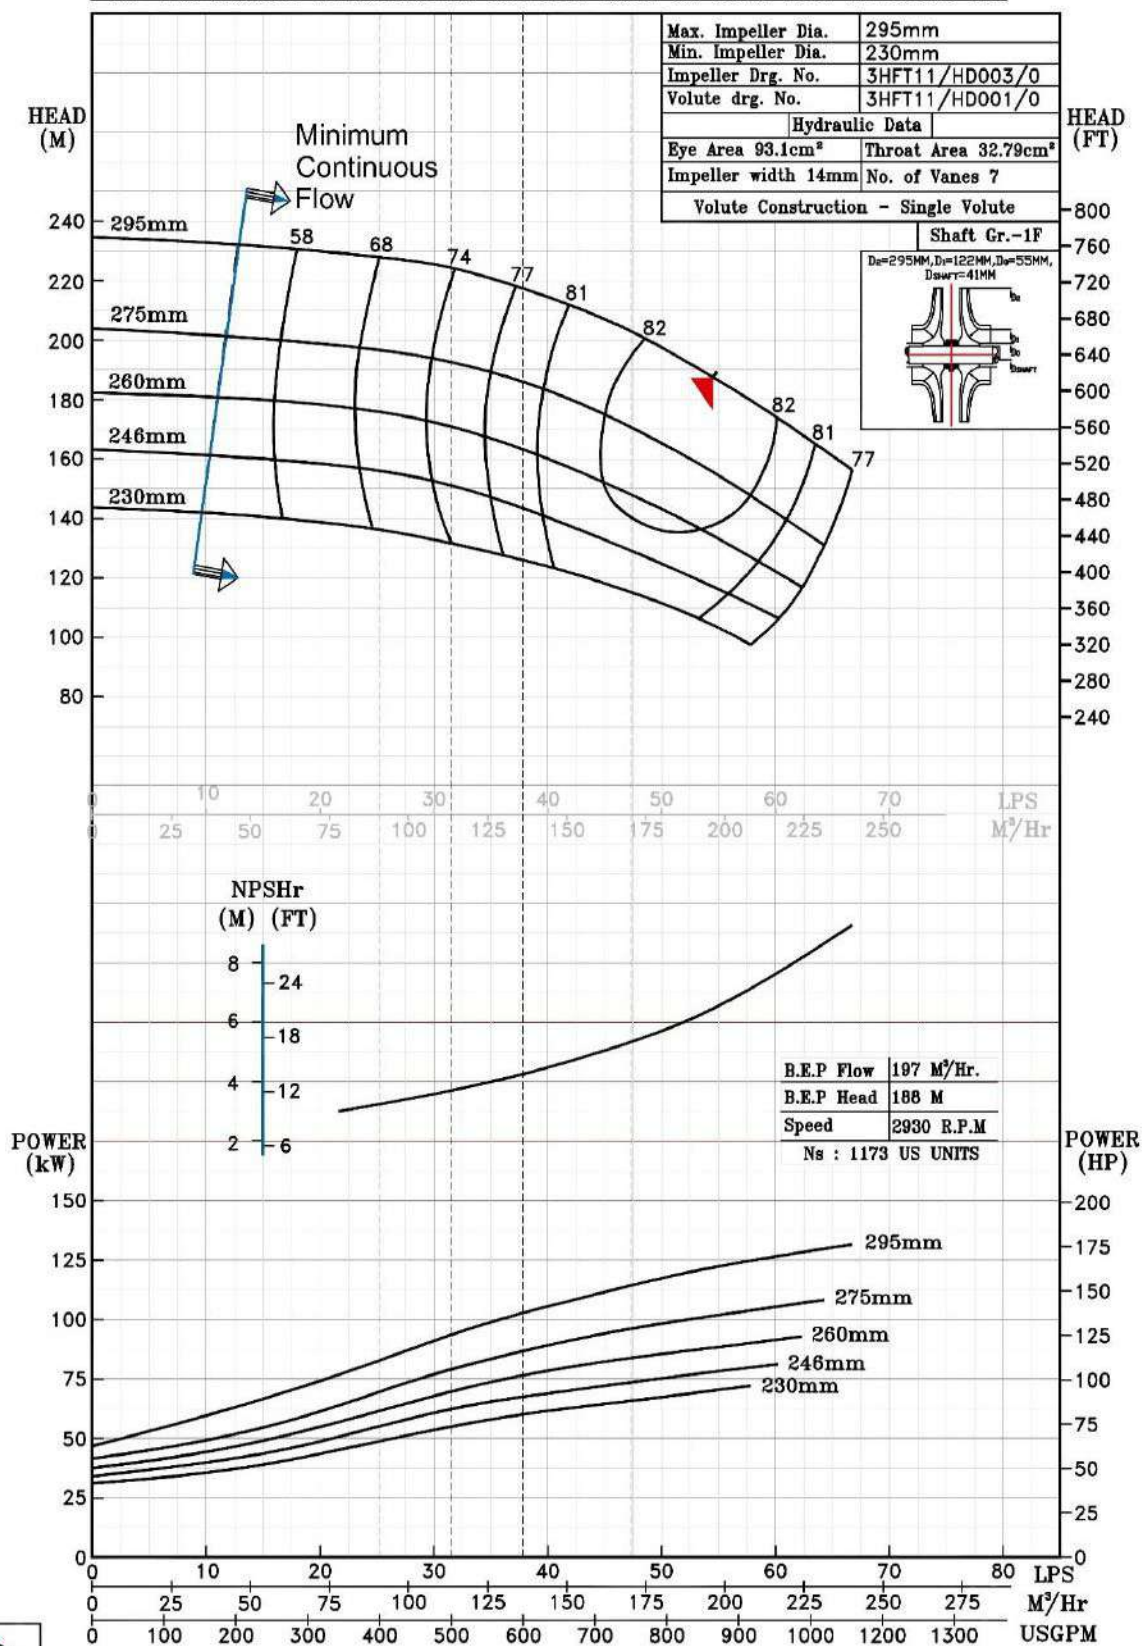

2930 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 3HFTD14 @2970 R.P.M

3HFTD14/Y/900452


FISHER PUMP

HFT RANGE

MODEL 3HFTD14	WORKING PRESS	36 bar
SIZE 125x80-350	TEST PRESS.	54 bar
TYPE-AXIALLY SPLIT CASE SINGLE STAGE	SPEED	2970 rpm

RATED CAPACITY - 500 USGPM

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

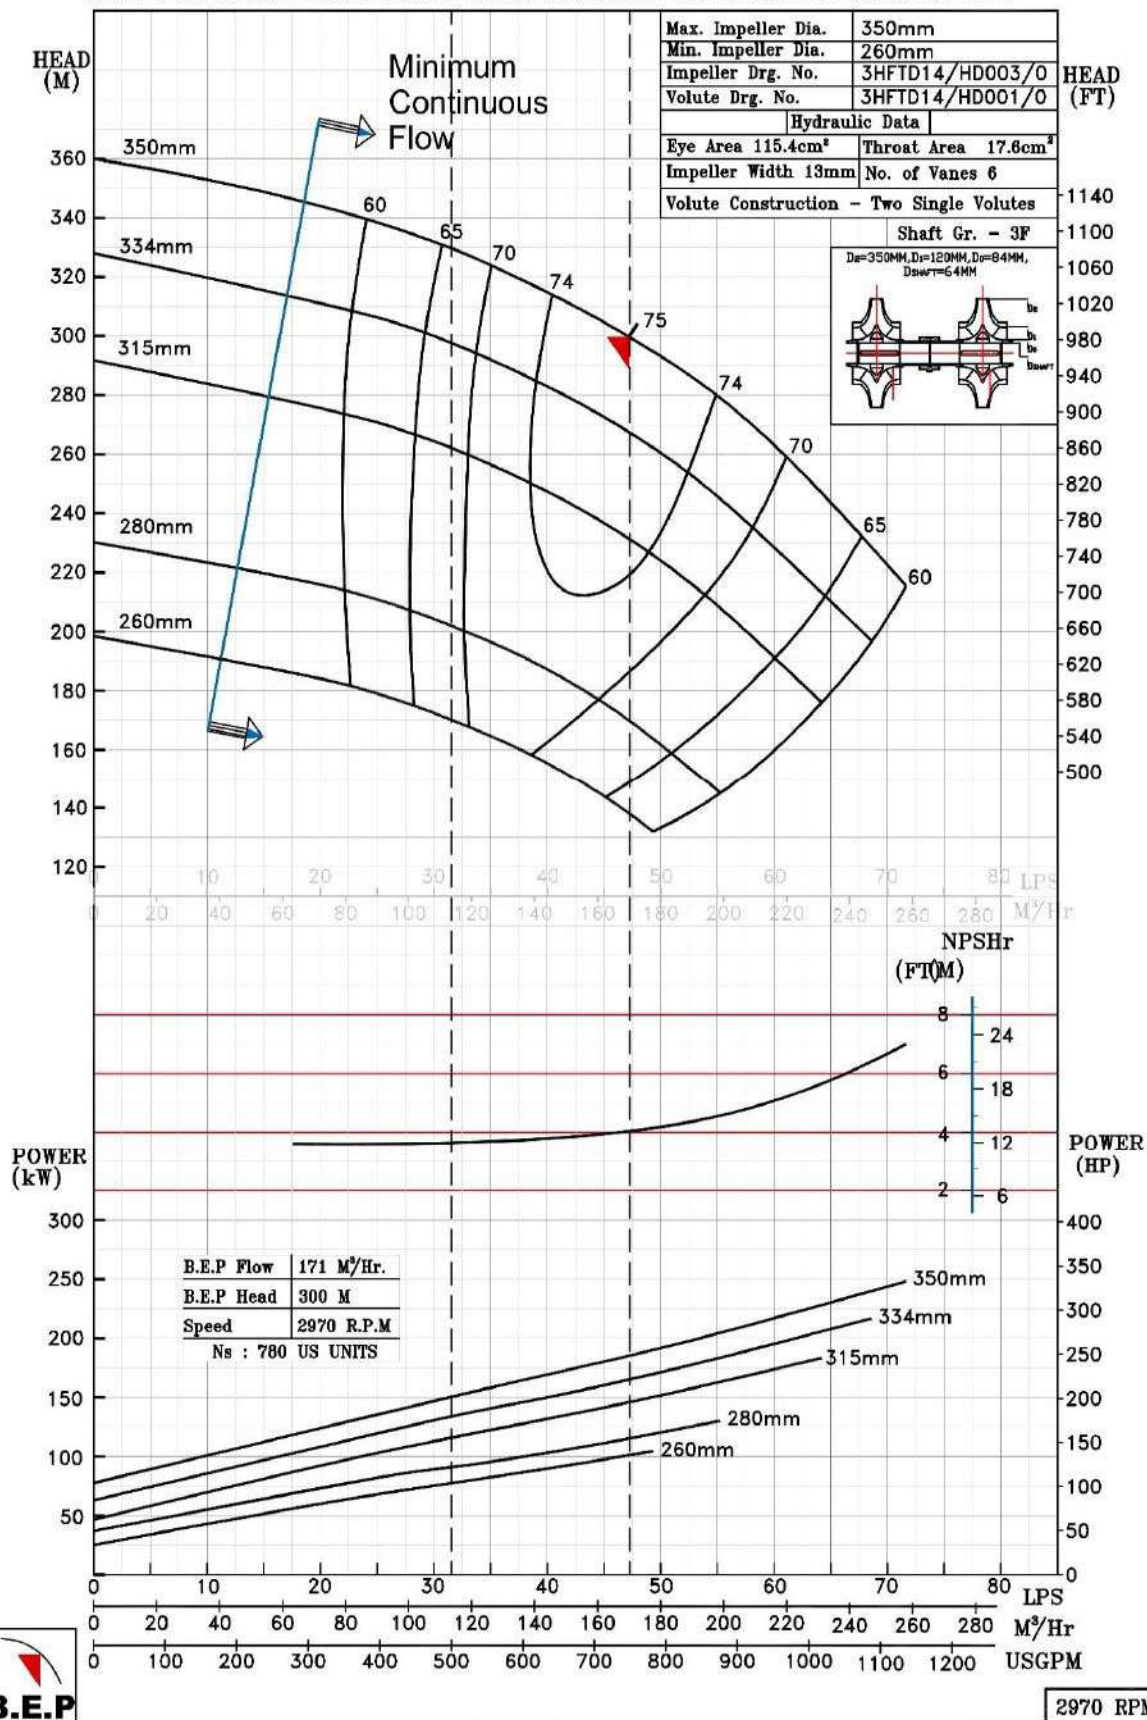

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 4HFT12 @2960 R.P.M

4HFT12/X/910852

FISHER PUMP

HFT RANGE

MODEL 4HFT12

WORKING PRESS. 30 bar


SIZE 125x100-310

TEST PRESS. 45 bar

TYPE-AXIALLY SPLIT CASE TWO STAGE

SPEED 2960 rpm

RATED CAPACITY - 750 USGPM

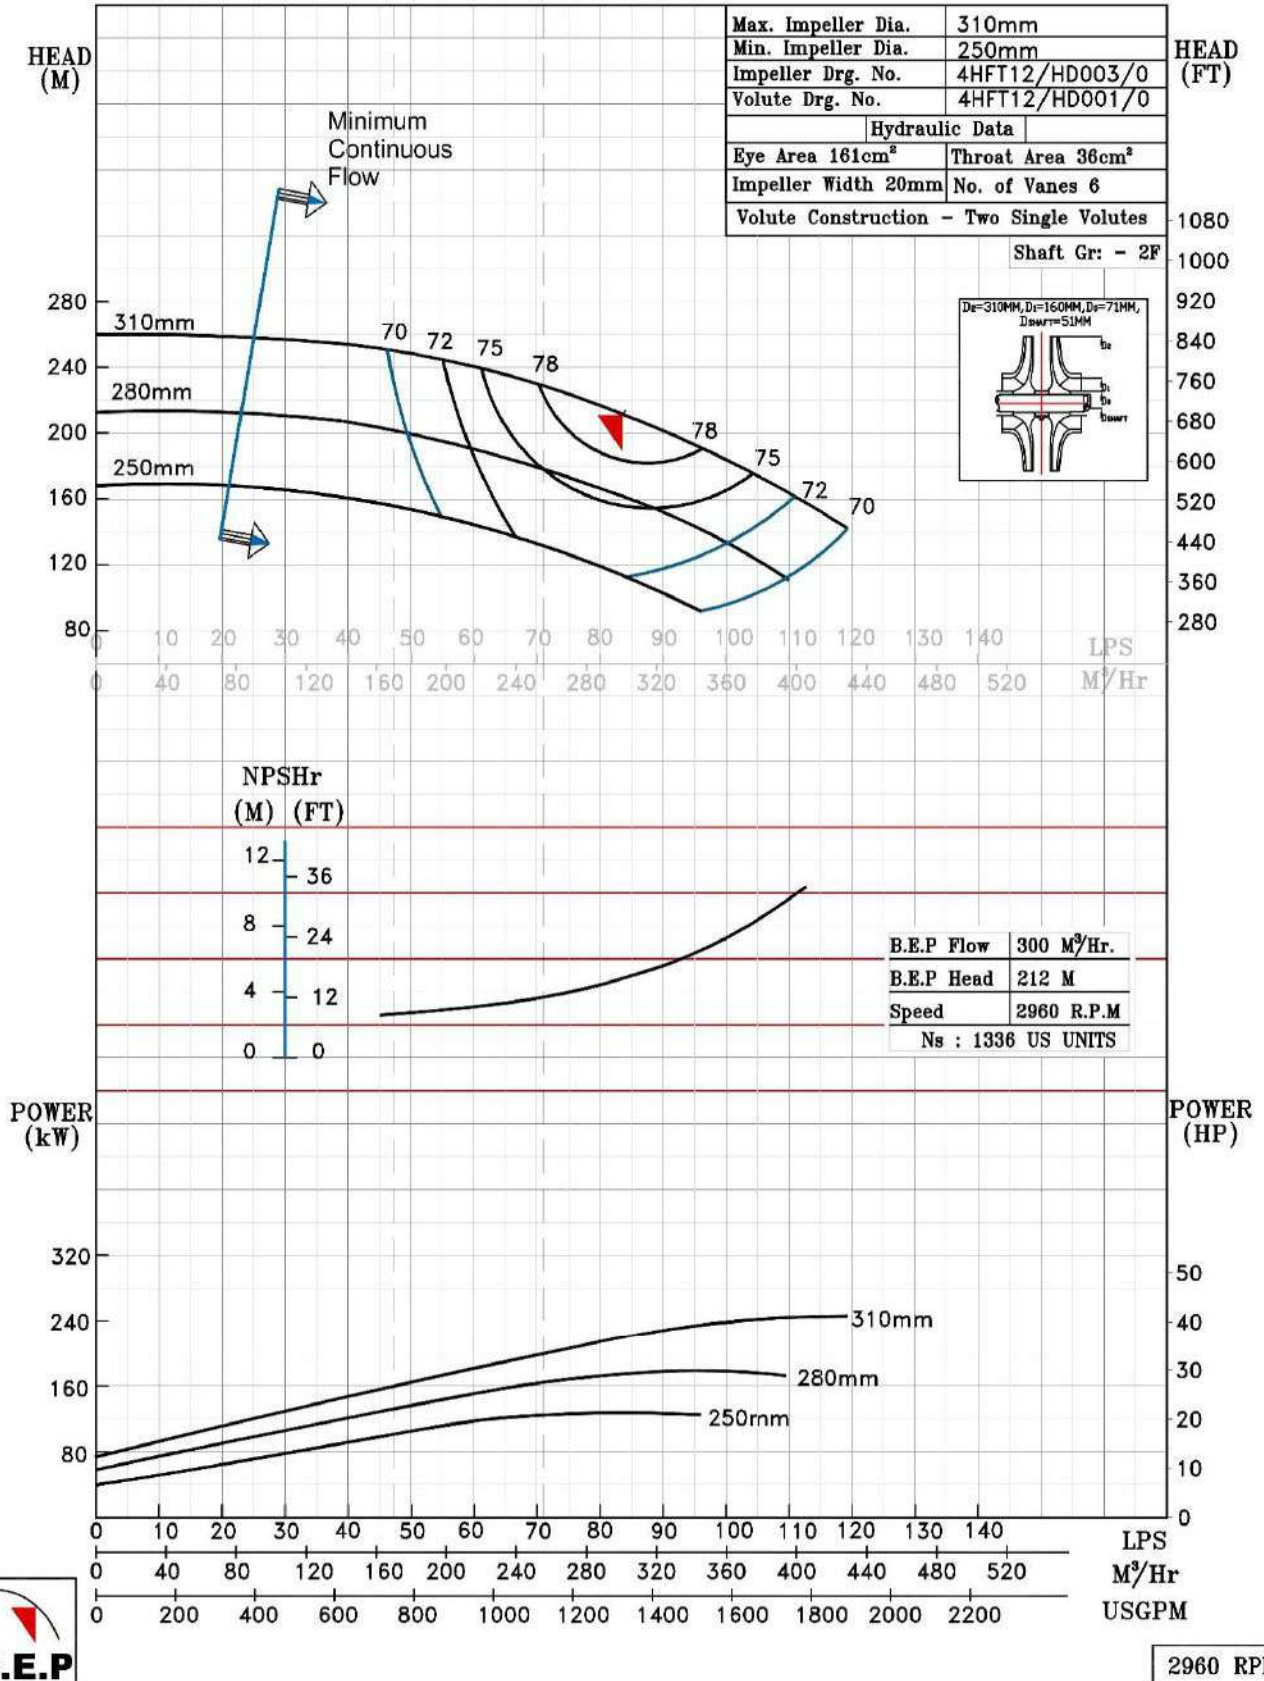

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 4HFTD13 @2950 R.P.M

4HFTD13/X/0111

FISHER PUMP

HFT RANGE

MODEL 4HFTD13

WORKING PRESS. 40 bar

SIZE 150x100-350


TEST PRESS. 60 bar

TYPE-AXIALLY SPLIT CASE TWO STAGE

SPEED 2950 rpm

RATED CAPACITY - 750 USGPM

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G. 1.0

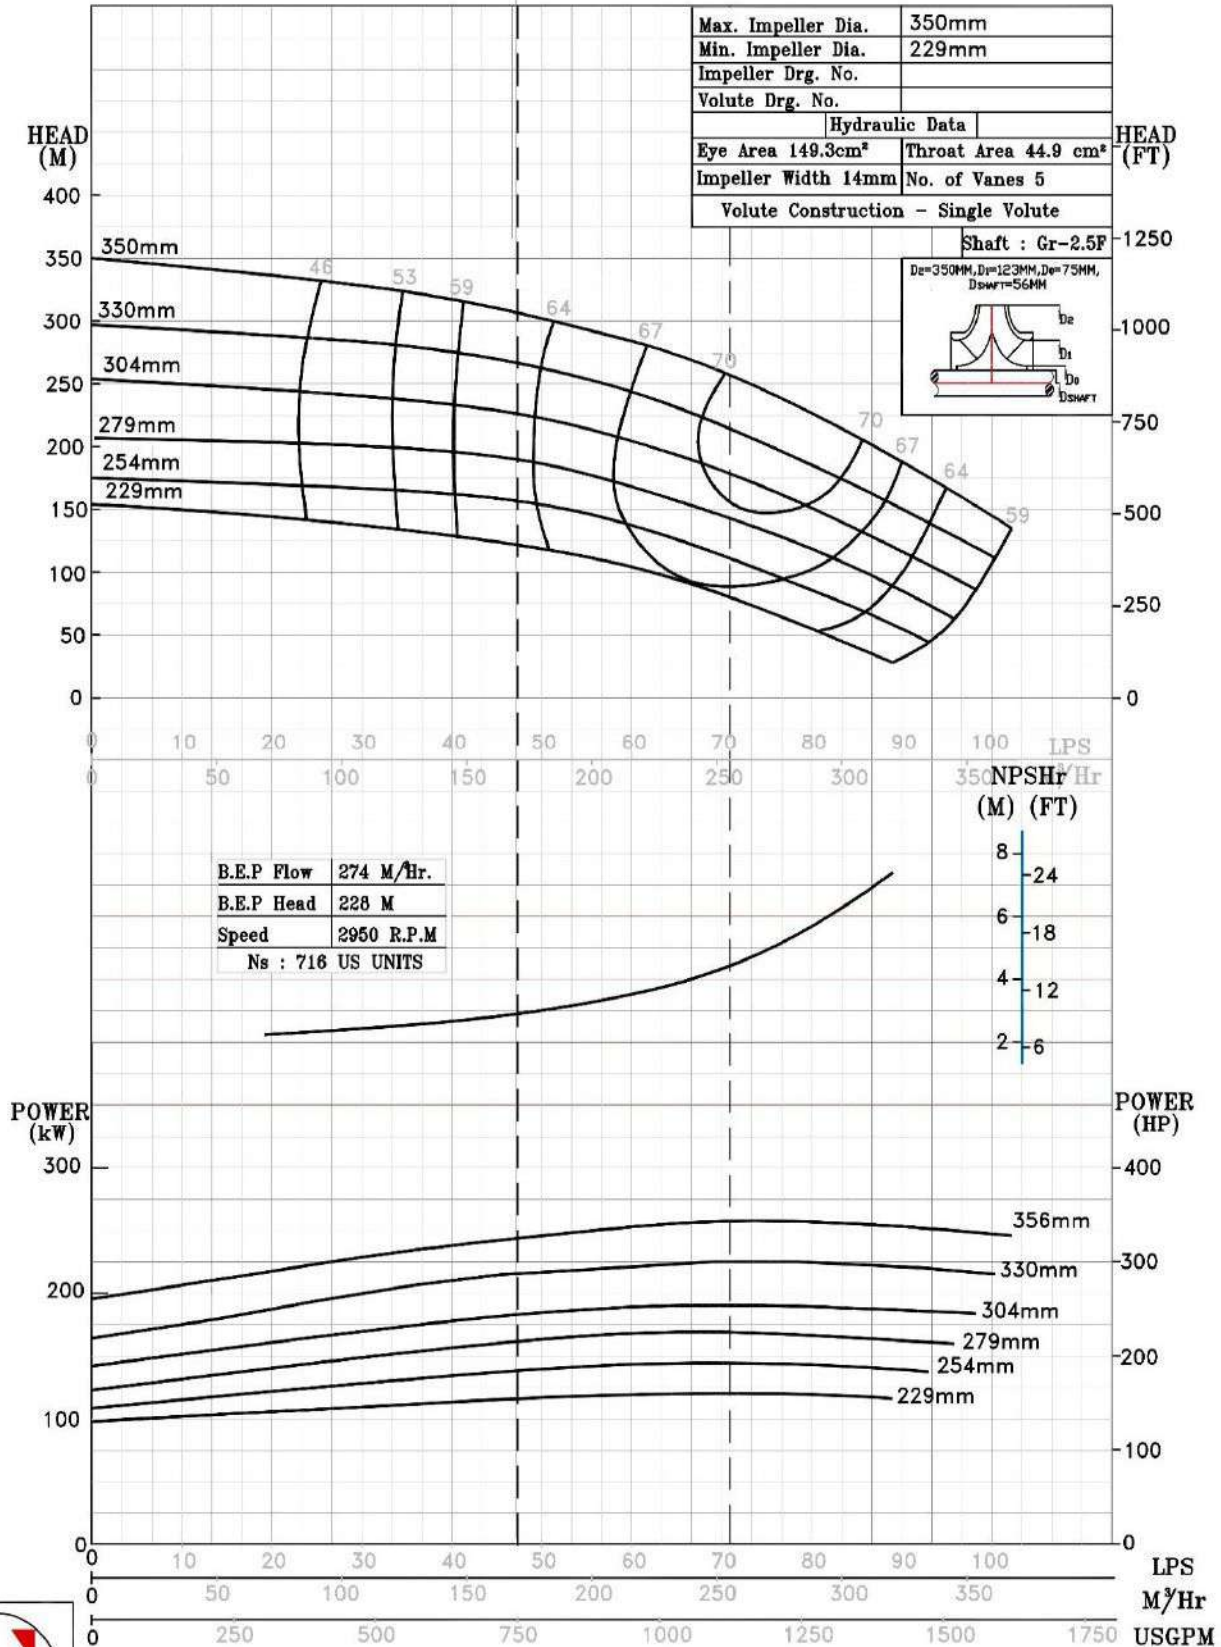

2950 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 4HFT14 @2950 R.P.M

4HFT14/X/900552


FISHER PUMP

HFT RANGE

RATED CAPACITY - 750,1000 USGPM

MODEL 4HFT14	WORKING PRESS. 36 bar
SIZE 150x100-352	TEST PRESS. 54 bar
TYPE-AXIALLY SPLIT CASE TWO STAGE	
SPEED 2950 rpm	

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

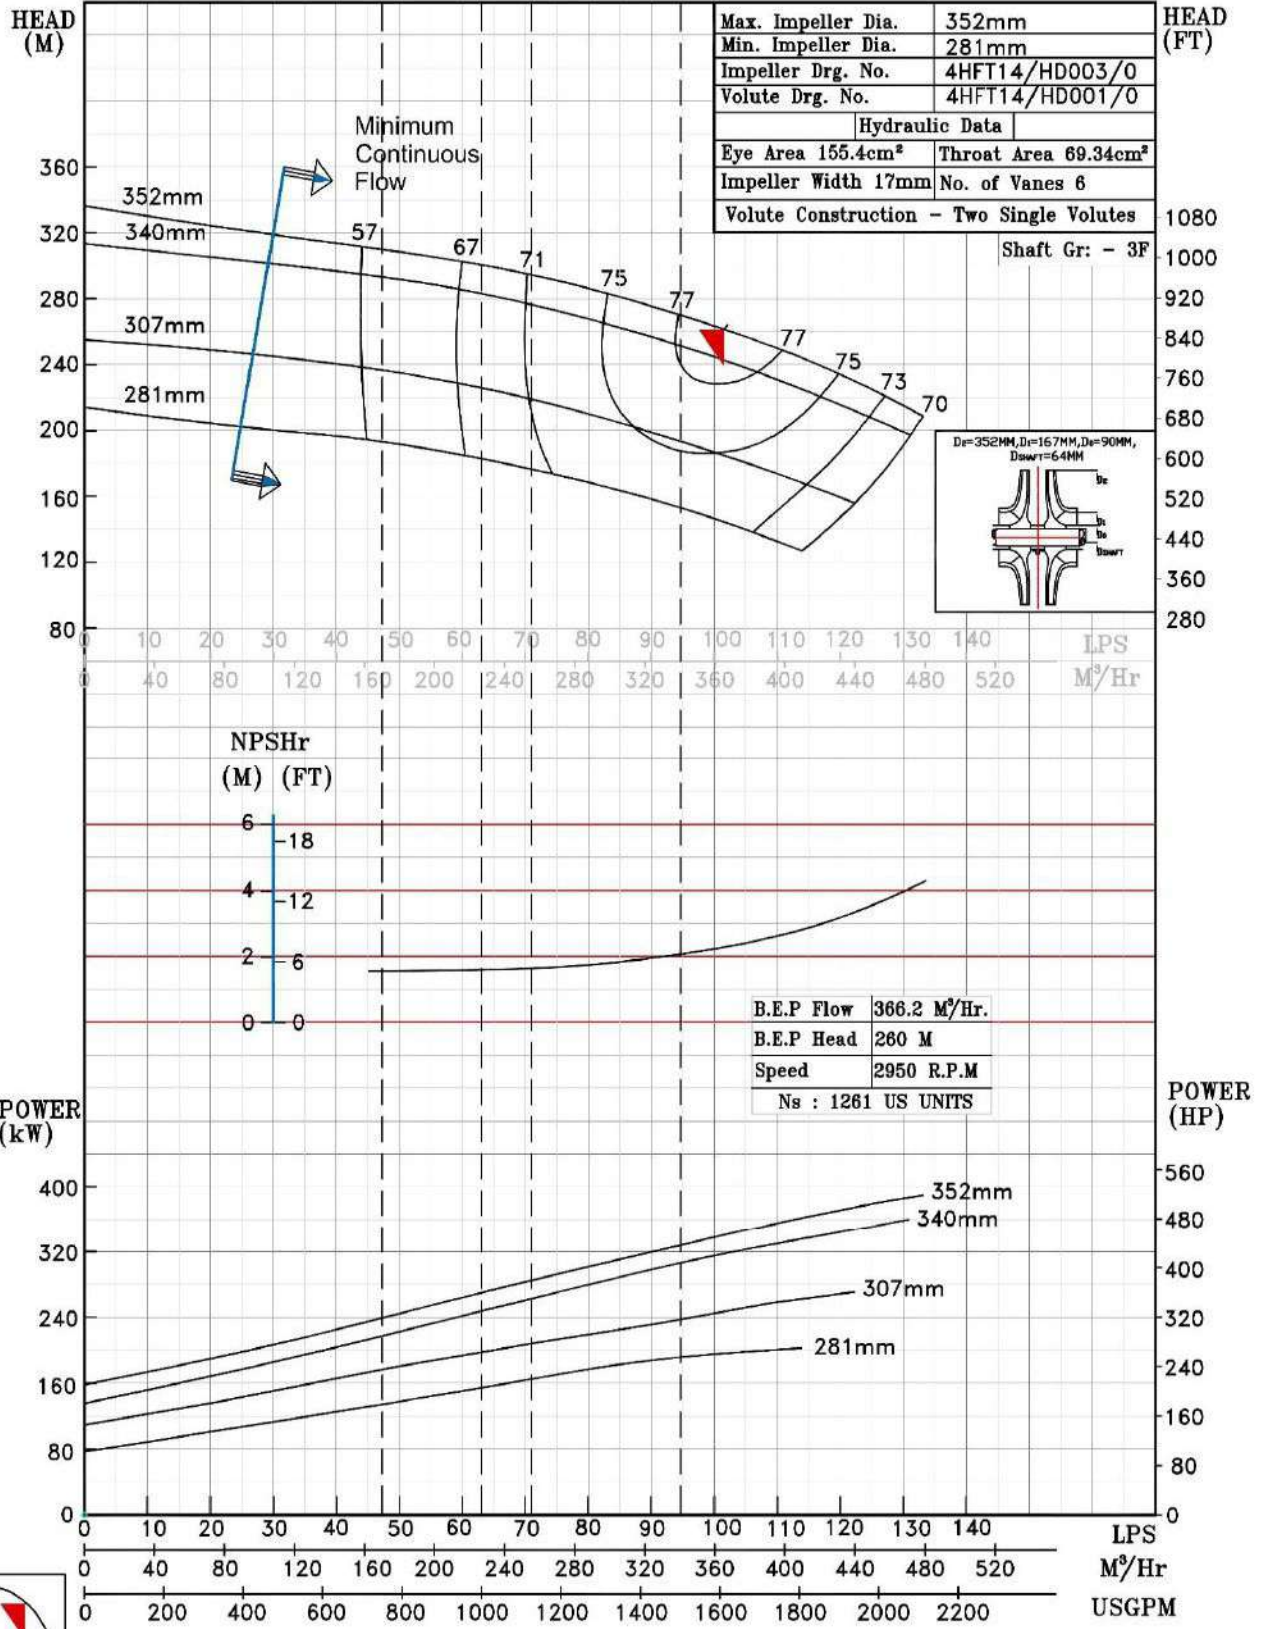

2950 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 6HFTD13 @2930 R.P.M

6HFTD13/Y/910752

FISHER PUMP

HFT RANGE

MODEL 6HFTD13

WORKING PRESS. 36 bar

SIZE 200x150-334


TEST PRESS. 45 bar

TYPE-AXIALY SPLIT CASE TWO STAGE

SPEED 2930 rpm

RATED CAPACITY - 1250,1500 USGPM

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

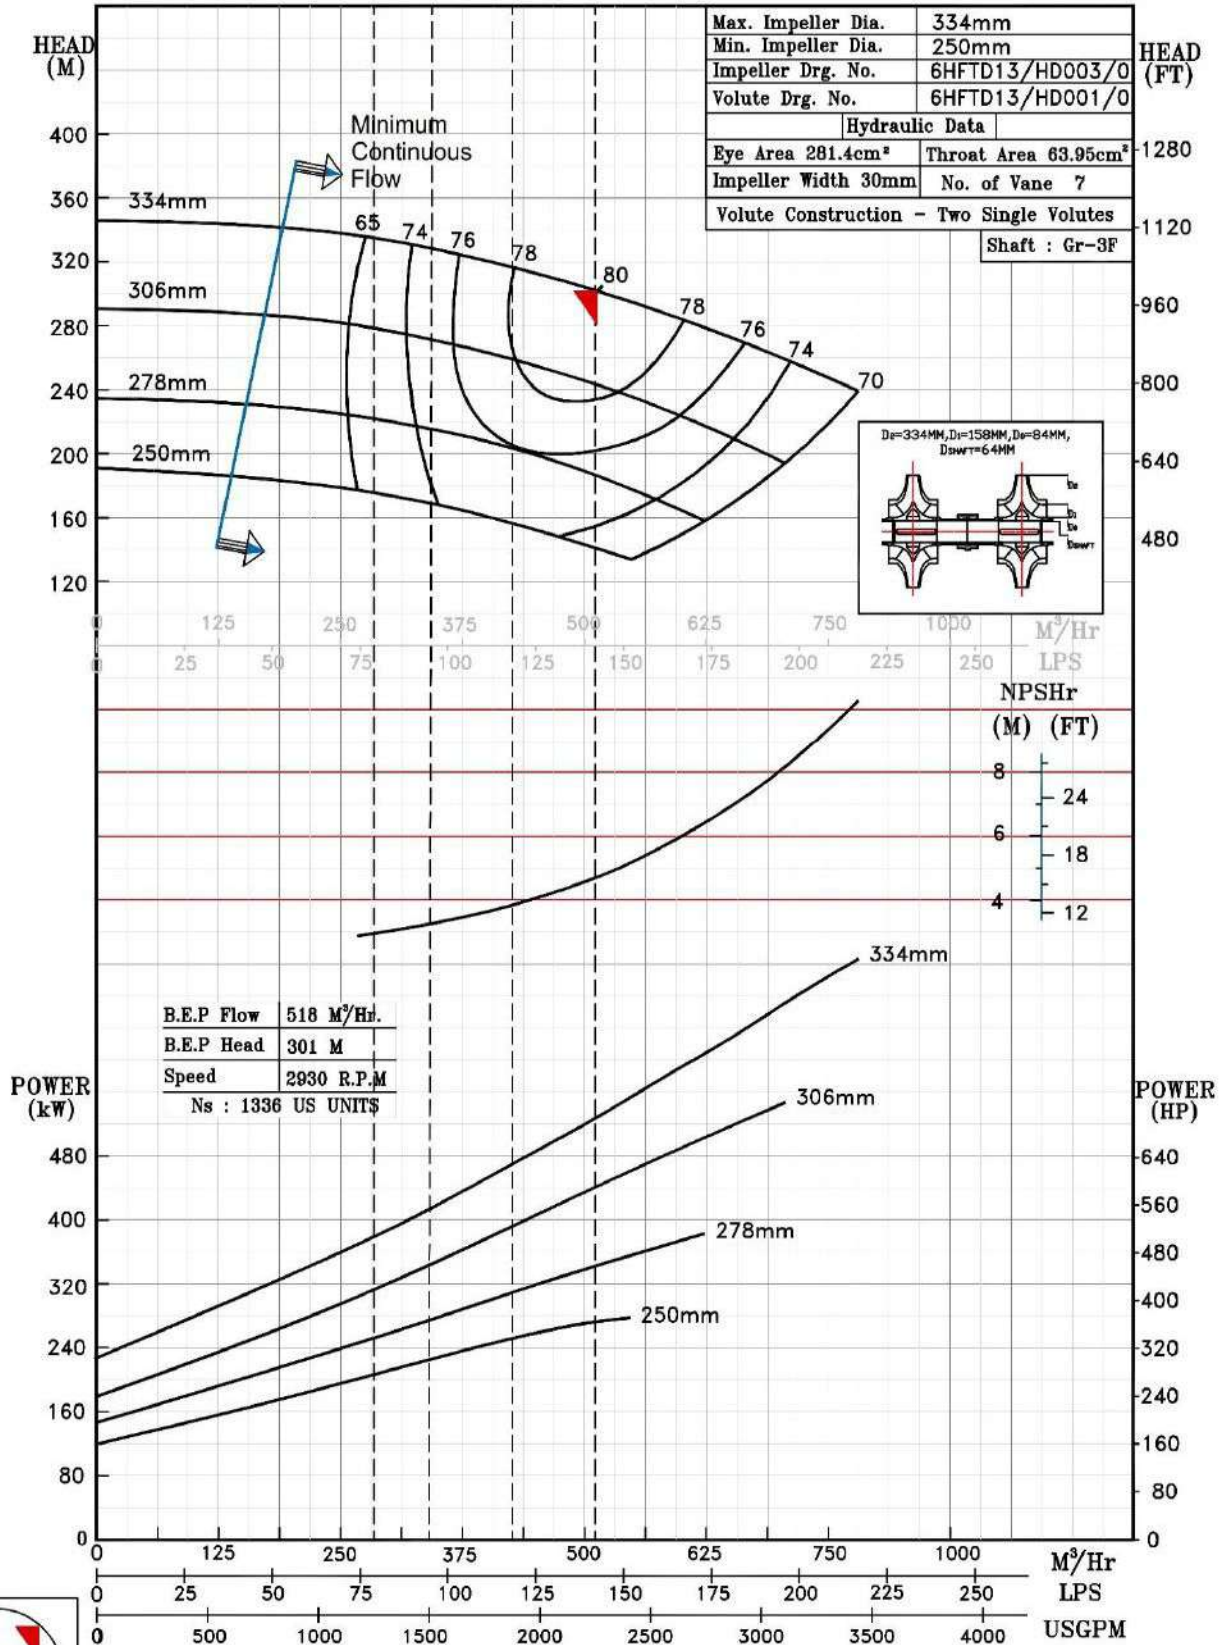

2930 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 6HFTD12S @2960 R.P.M

6HFTD12S/Y/901252


FISHER PUMP

HFT RANGE

MODEL 6HFTD12S	WORKING PRESS. 36 bar
SIZE 200x150-330	TEST PRESS. 54 bar
TYPE-AXIALLY SPLIT CASE SINGLE STAGE	
SPEED 2960 rpm	

RATED CAPACITY - 2000 USGPM

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

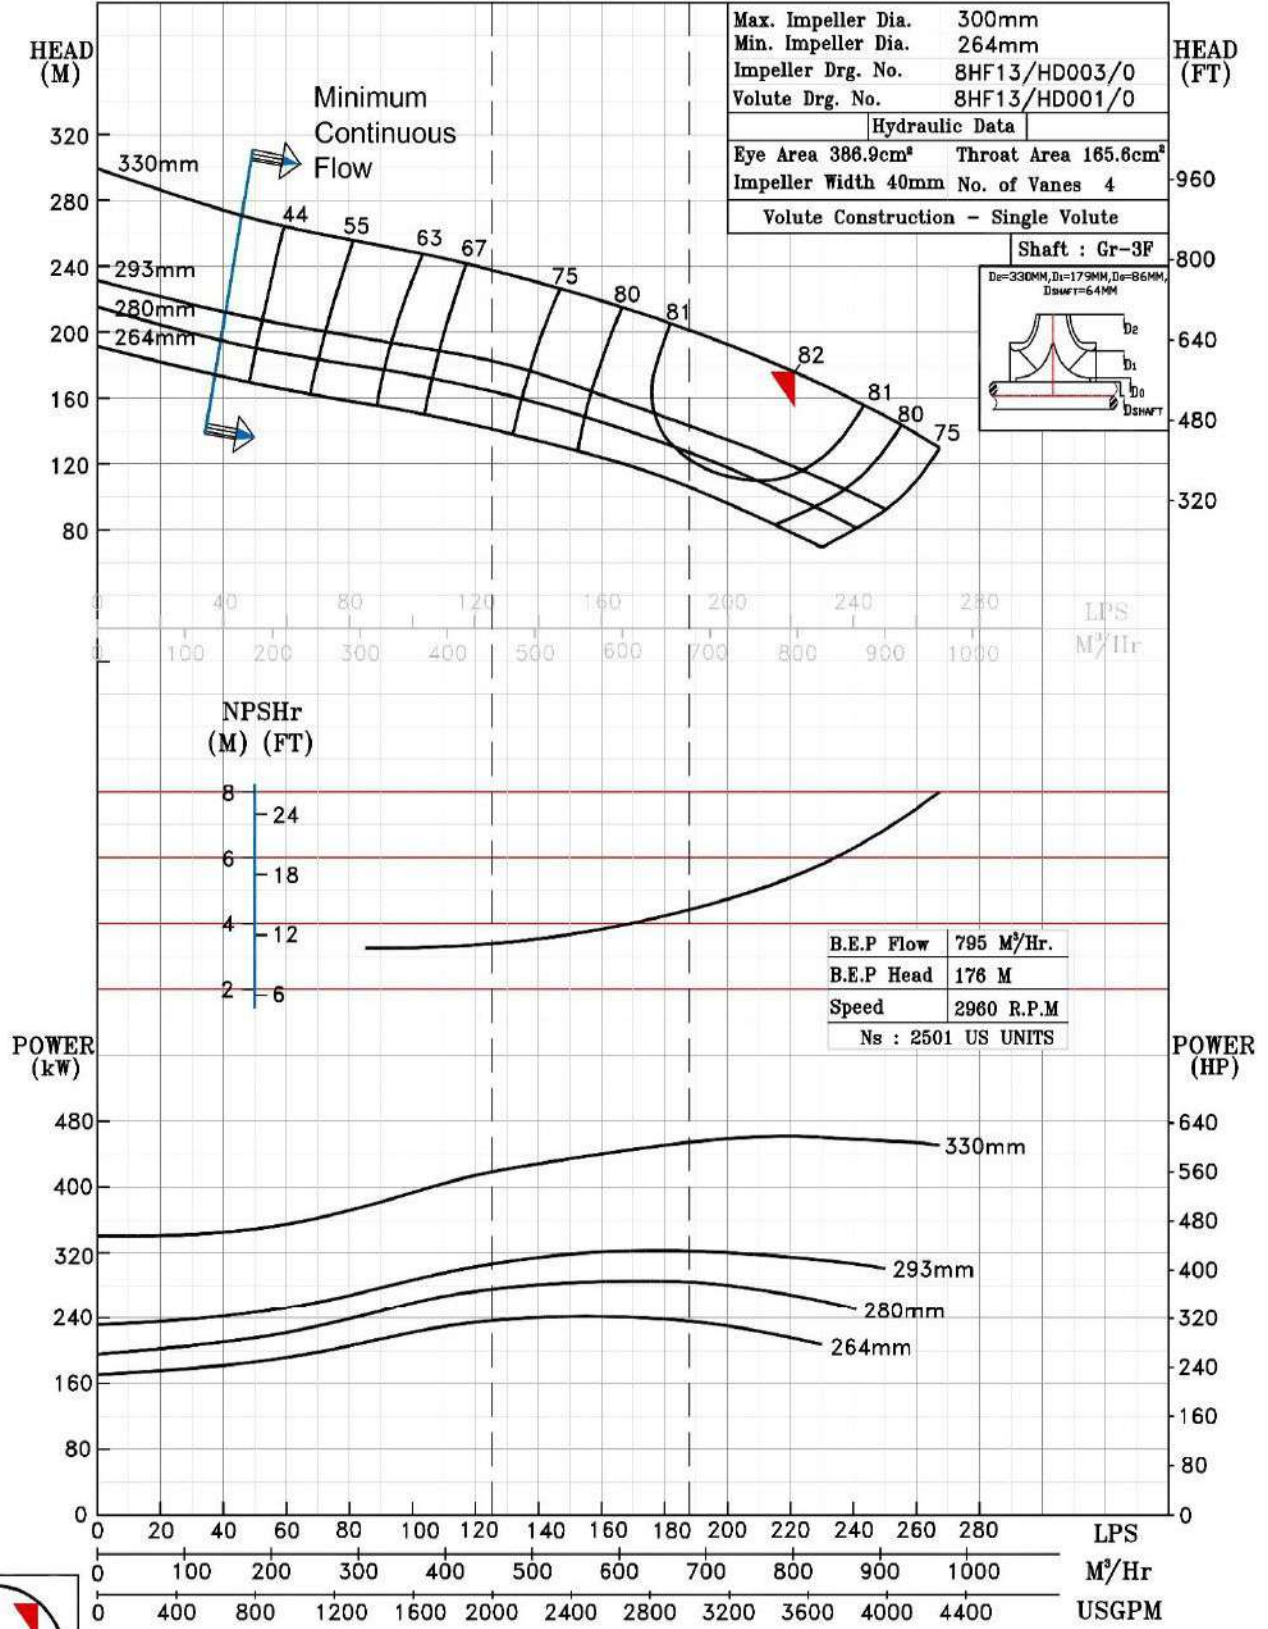

2960 RPM

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 6HFTD12L @2975 R.P.M

6HFTD12L/Y/0111


FISHER PUMP

HFT RANGE

MODEL 6HFTD12L	WORKING PRESS.	30 bar
SIZE 200x150-314	TEST PRESS.	45 bar
TYPE-AXIALLY SPLIT CASE TWO STAGE		SPEED 2975 rpm

RATED CAPACITY - 1000,1250 USGPM

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

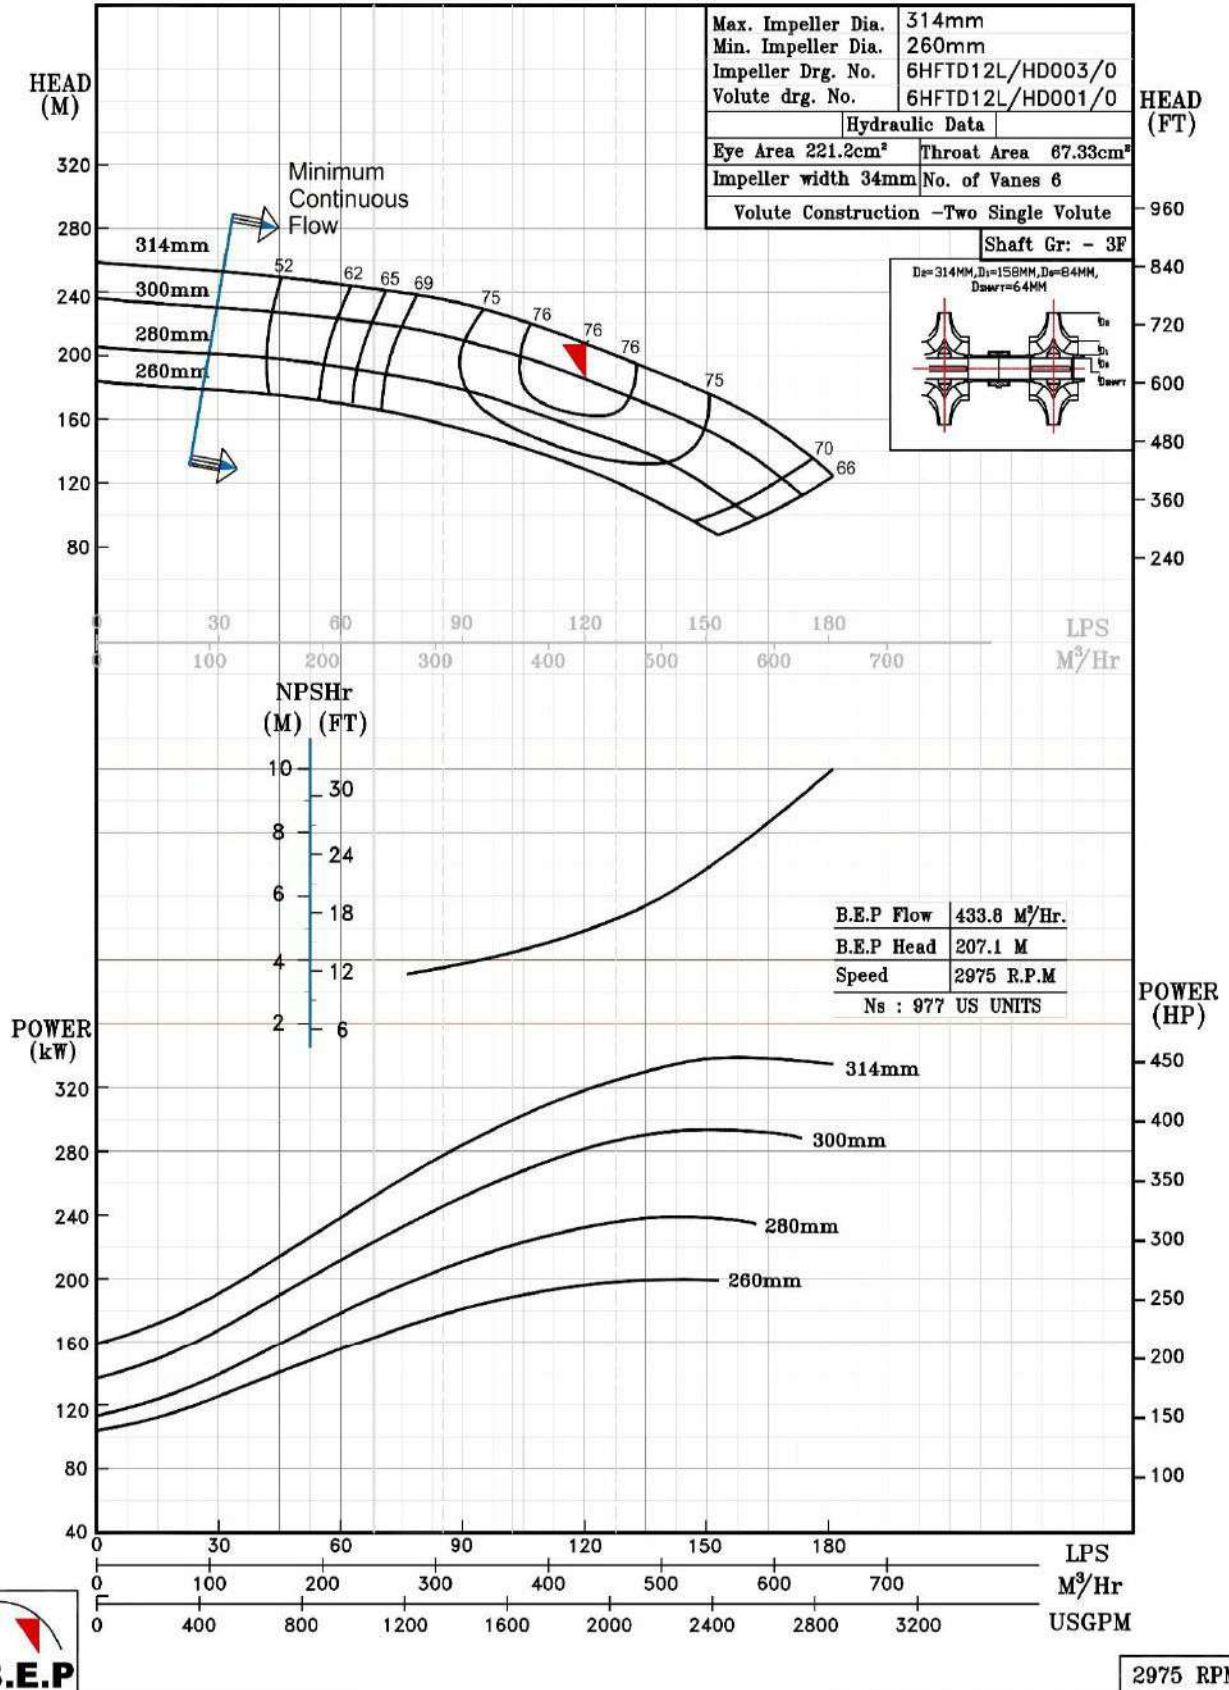

2975 RPM