

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 8HS15 @1480 R.P.M

8HS15/Y/107054

FISHER PUMP

HS RANGE


MODEL 8HS15	WORKING PRESS. 16 bar
SIZE 250x200-375	TEST PRESS. 24 bar
TYPE-AXIALLY SPLIT CASE SINGLE STAGE	SPEED 1480 rpm
	DATE - 06.10.2022

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0


Max. Impeller Dia.	375mm
Min. Impeller Dia.	300mm
Impeller Drg. No.	170G030P
Volute Drg. No.	170G010P
Hydraulic Data	
Eye Area 509cm²	Throat Area 214.6cm²
Impeller Width 57mm	No. of Vanes 6
Volute Construction - Single Volute	

Shaft : Gr-3



HEAD
(M)

HEAD
(FT)

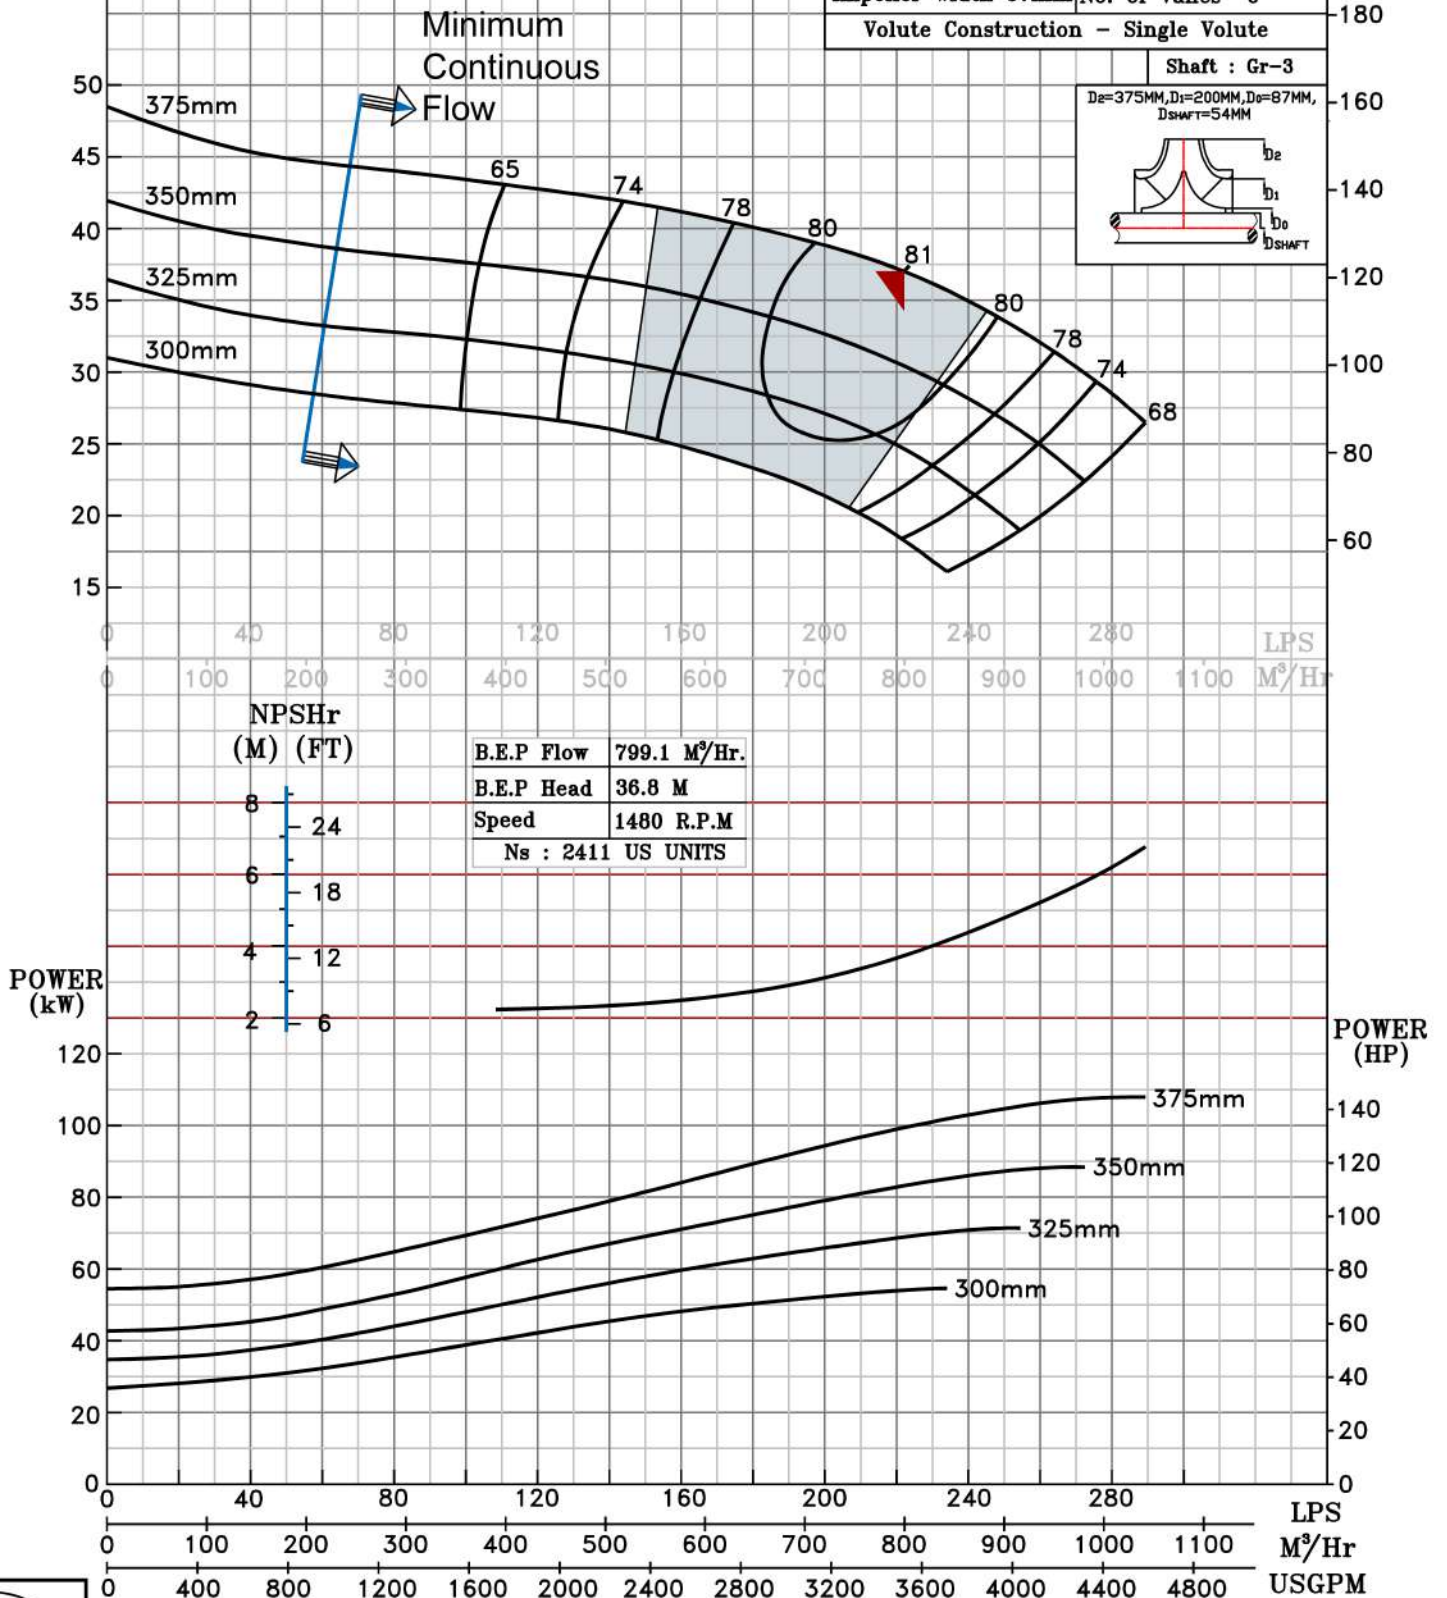

1480 RPM