

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 10HS12 @1780 R.P.M

10HS12/X/103264

FISHER PUMP

HS RANGE

MODEL 10HS12

WORKING PRESS 16 bar

SIZE 250x250-305


TEST PRESS. 24 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 1780 rpm


SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

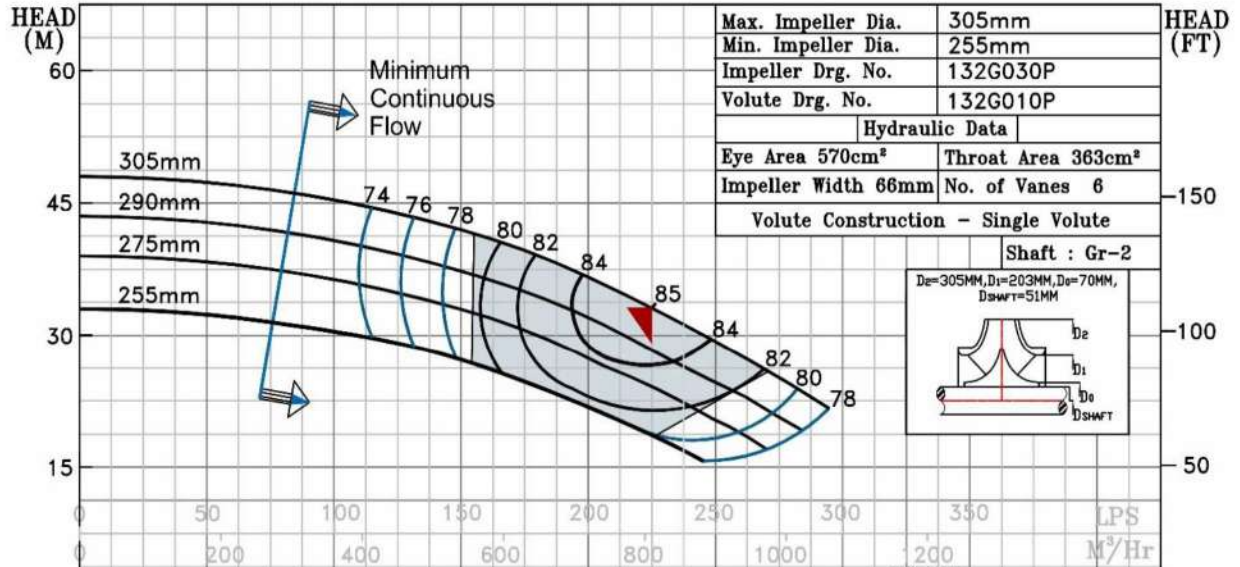

B.E.P Flow	807 M³/Hr.
B.E.P Head	34 M
Speed	1780 R.P.M
Ns :	3092 US UNITS

NPSHr
(M) (FT)

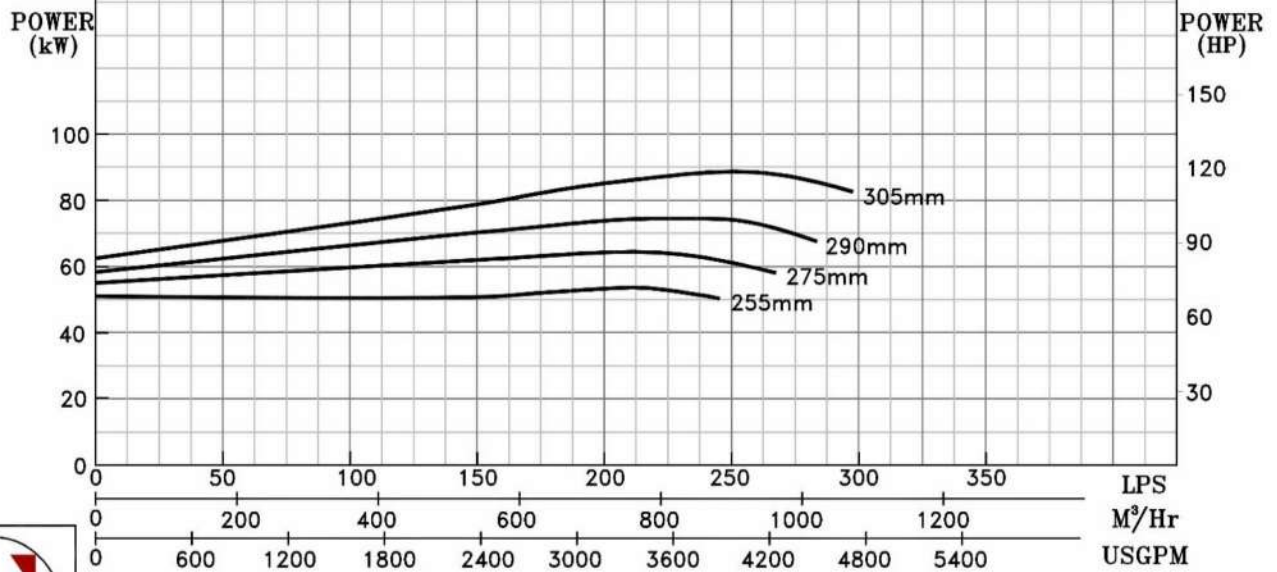

1780 RPM