

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 200HB @1465 R.P.M

200HB/X/202554

**FISHER PUMP**

CSC RANGE

MODEL 200HB

WORKING PRESS. 12 bar

SIZE 200x200-403

TEST PRESS. 18 bar


TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 1465 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

DATE - 10.08.14



PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

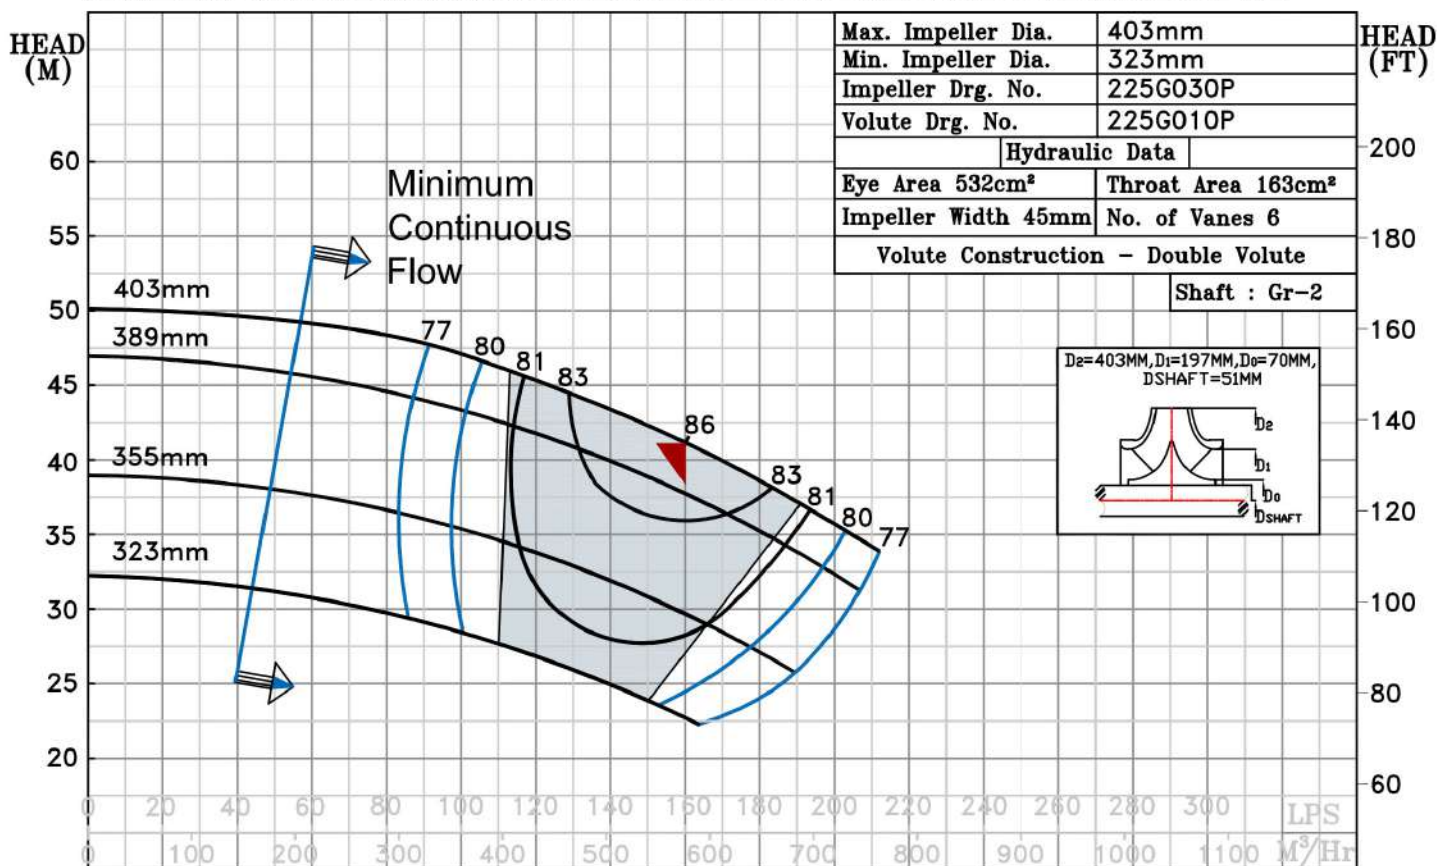

Max. Impeller Dia.	403mm
Min. Impeller Dia.	323mm
Impeller Drg. No.	225G030P
Volute Drg. No.	225G010P
Hydraulic Data	
Eye Area 532cm <sup>2</sup>	Throat Area 163cm <sup>2</sup>
Impeller Width 45mm	No. of Vanes 6
Volute Construction - Double Volute	
Shaft : Gr-2	

B.E.P Flow	575 M <sup>3</sup> /Hr.
B.E.P Head	41.5 M
Speed	1465 R.P.M
Ns : 1849 US UNITS	

NPSHr  
(M) (FT)

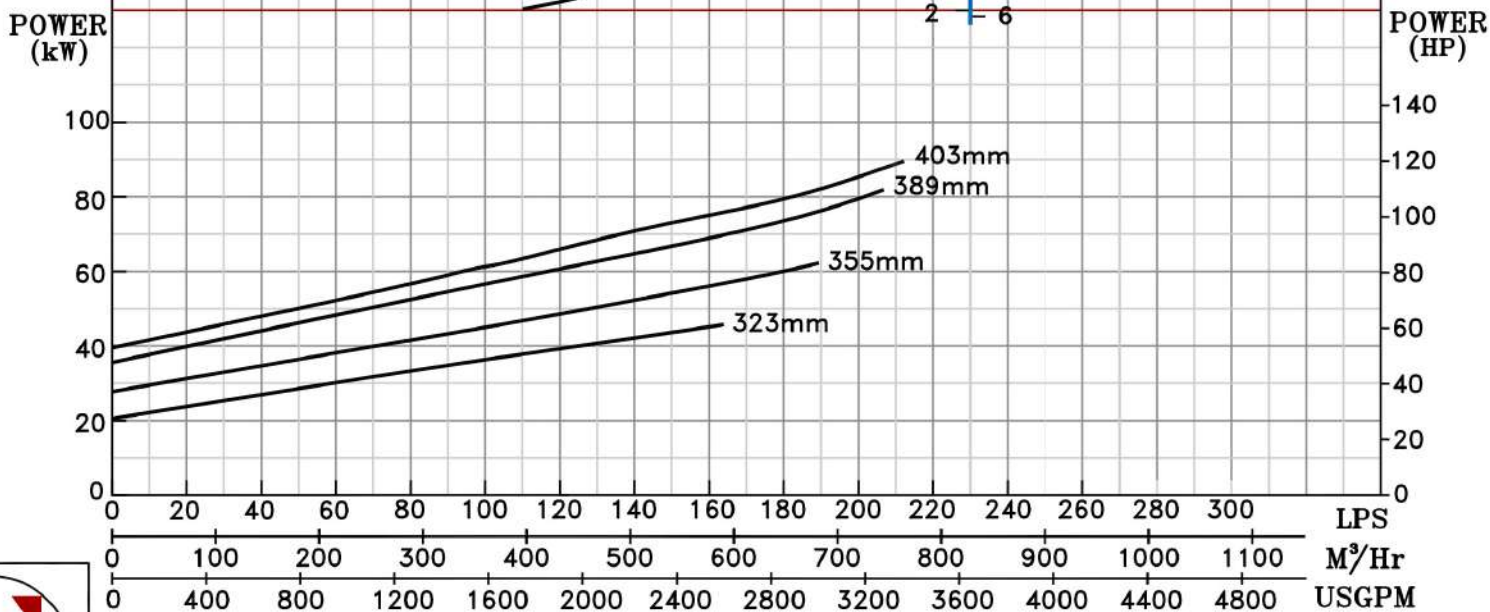

1465 RPM

