


NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B




PERFORMANCE CURVE OF 200HA @1760 R.P.M		200HA/X/202664	
<b>FISHER PUMP</b>	MODEL 200HA	WORKING PRESS. 12 bar	
	SIZE 250x200-405	TEST PRESS. 18 bar	
	TYPE-AXIALLY SPLIT CASE SINGLE STAGE		SPEED 1760 rpm
SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE			DATE - 10.08.14
PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0			

CSC RANGE

Max. Impeller Dia.	405mm
Min. Impeller Dia.	353mm
Impeller Drg. No.	226G030P
Volute Drg. No.	226G010P
Hydraulic Data	
Eye Area 504cm <sup>2</sup>	Throat Area 210cm <sup>2</sup>
Impeller Width 60mm	No. of Vanes 7
Volute Construction - Double Volute	
Shaft : Gr-3	

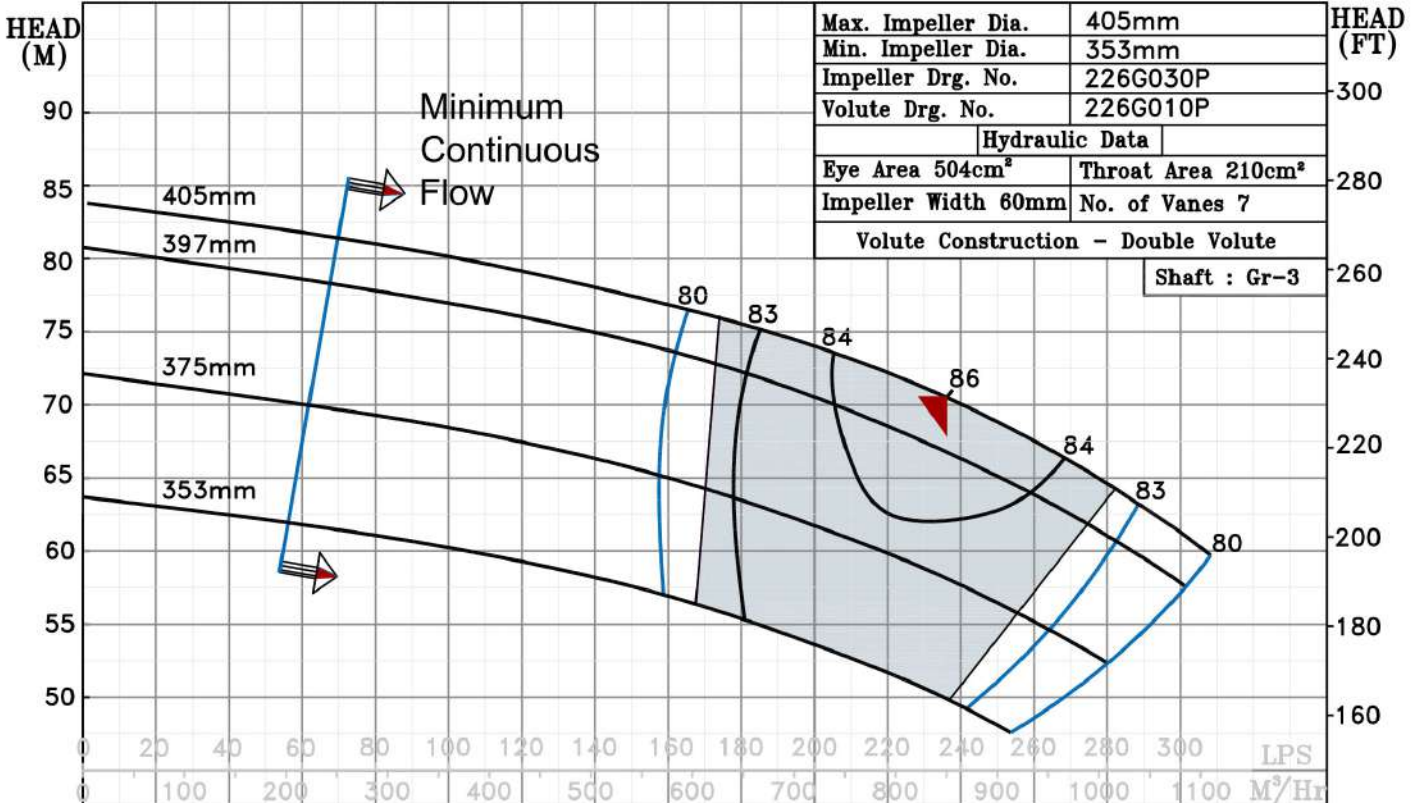

B.E.P Flow	856 M <sup>3</sup> /Hr.
B.E.P Head	71.1 M
Speed	1760 R.P.M
Ns : 1811 US UNITS	

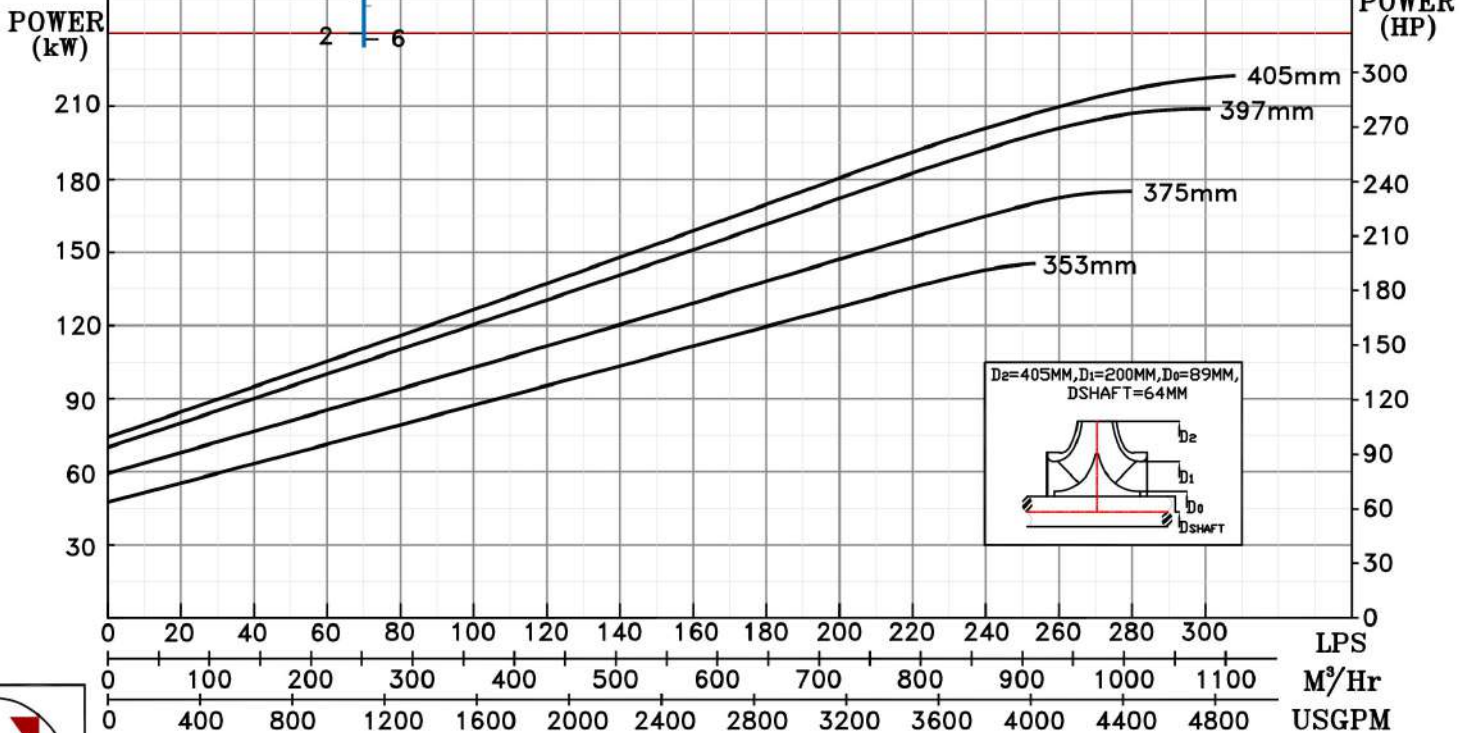

1760 RPM