



NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 200HL @1780 R.P.M		200HL/Y/202764	
<b>FISHER PUMP</b>	MODEL 200HL	WORKING PRESS.	16 bar
	SIZE 200x200-440	TEST PRESS.	24 bar
	TYPE-AXIALLY SPLIT CASE SINGLE STAGE		
CSC RANGE	SPEED 1780 rpm		DATE - 10.12.14

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE  
 PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

Max. Impeller Dia.	440mm
Min. Impeller Dia.	355mm
Impeller Drg. No.	227G030P
Volute Drg. No.	227G010P
Hydraulic Data	
Eye Area 479cm <sup>2</sup>	Throat Area 163cm <sup>2</sup>
Impeller Width 45mm	No. of Vanes 6
Volute Construction - Double Volute	
Shaft : Gr-3	

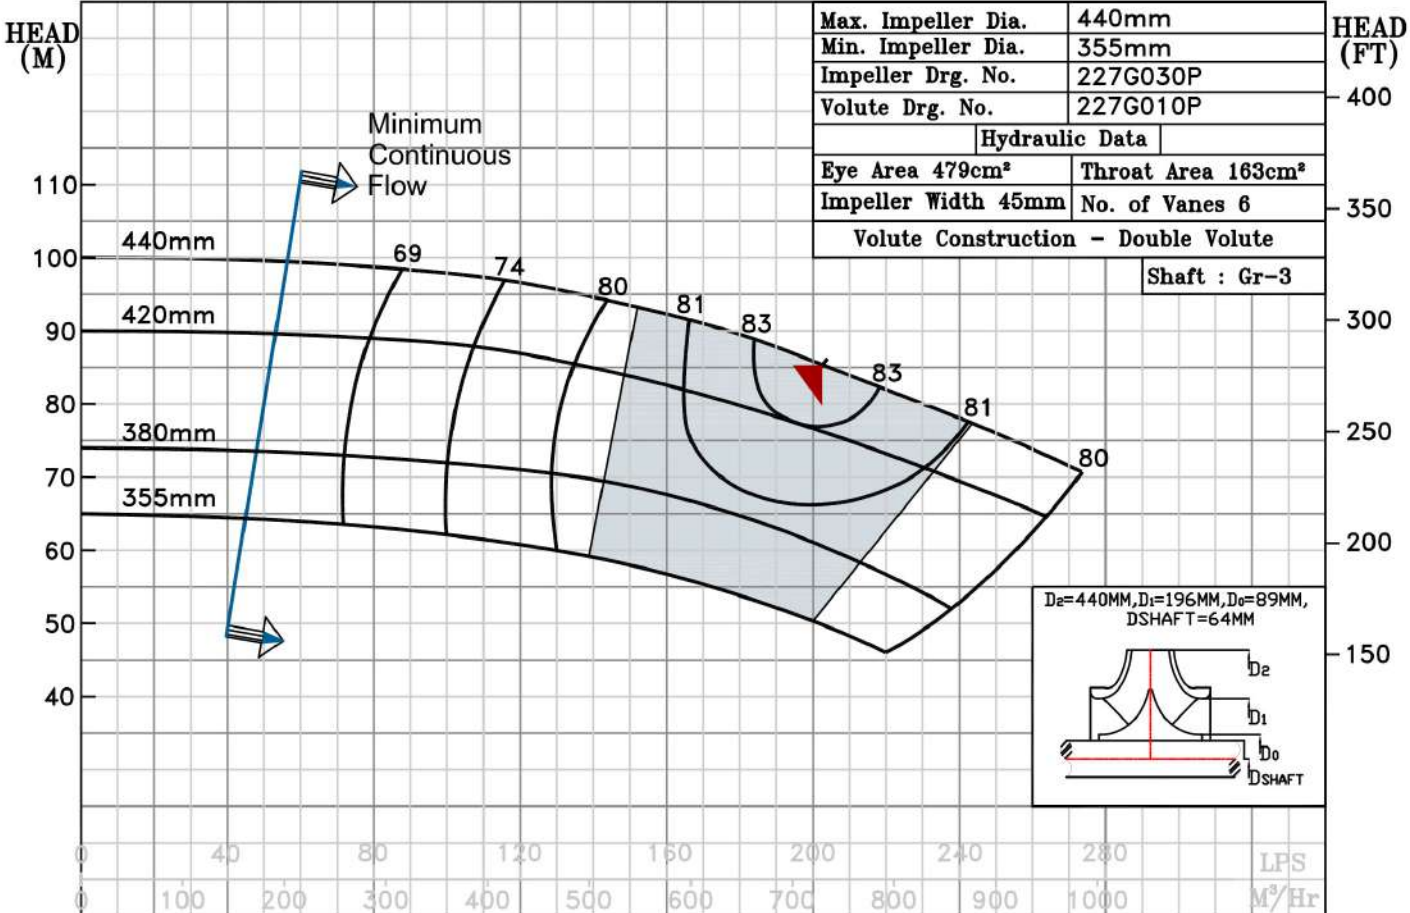

B.E.P Flow	727.6 M <sup>3</sup> /Hr.
B.E.P Head	85.5 M
Speed	1780 R.P.M
Ns : 1470 US UNITS	

