

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 10SF22 @1780 R.P.M

10SF22/Y/506964

FISHER PUMP

SF RANGE

MODEL 10SF22

WORKING PRESS. 20 bar

SIZE 300x250-568


TEST PRESS. 30 bar

TYPE-AXIALY SPLIT CASE SINGLE STAGE

SPEED 1780 rpm


SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

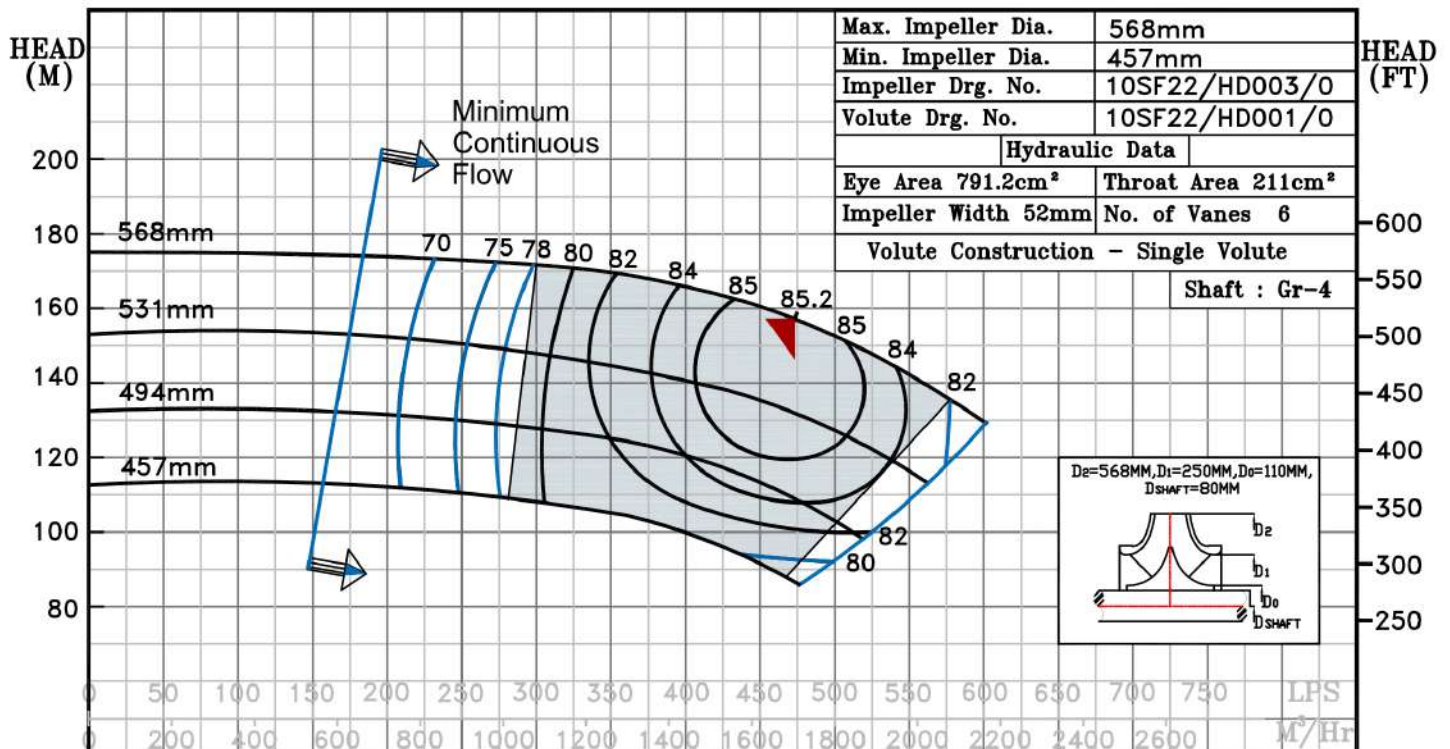

B.E.P Flow	1706 M³/Hr.
B.E.P Head	158 M
Speed	1780 R.P.M
Ns	1420 US UNITS

NPSHr	
(M)	(FT)
16	50
12	40
8	30
4	20
	10

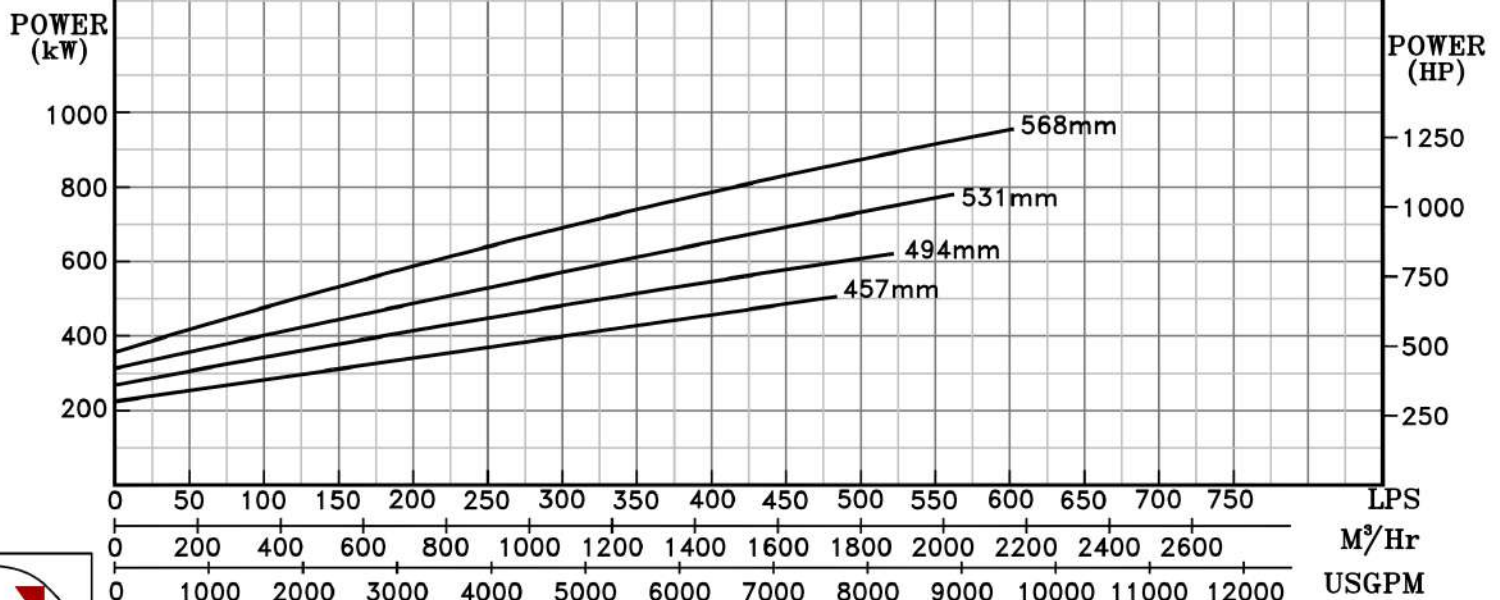

1780 RPM

