

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 5SF20 @1780 R.P.M

5SF20/X/506364

FISHER PUMP

SF RANGE

MODEL 5SF20

WORKING PRESS. 20 bar

SIZE 150x125-525


TEST PRESS. 30 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE



SPEED 1780 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

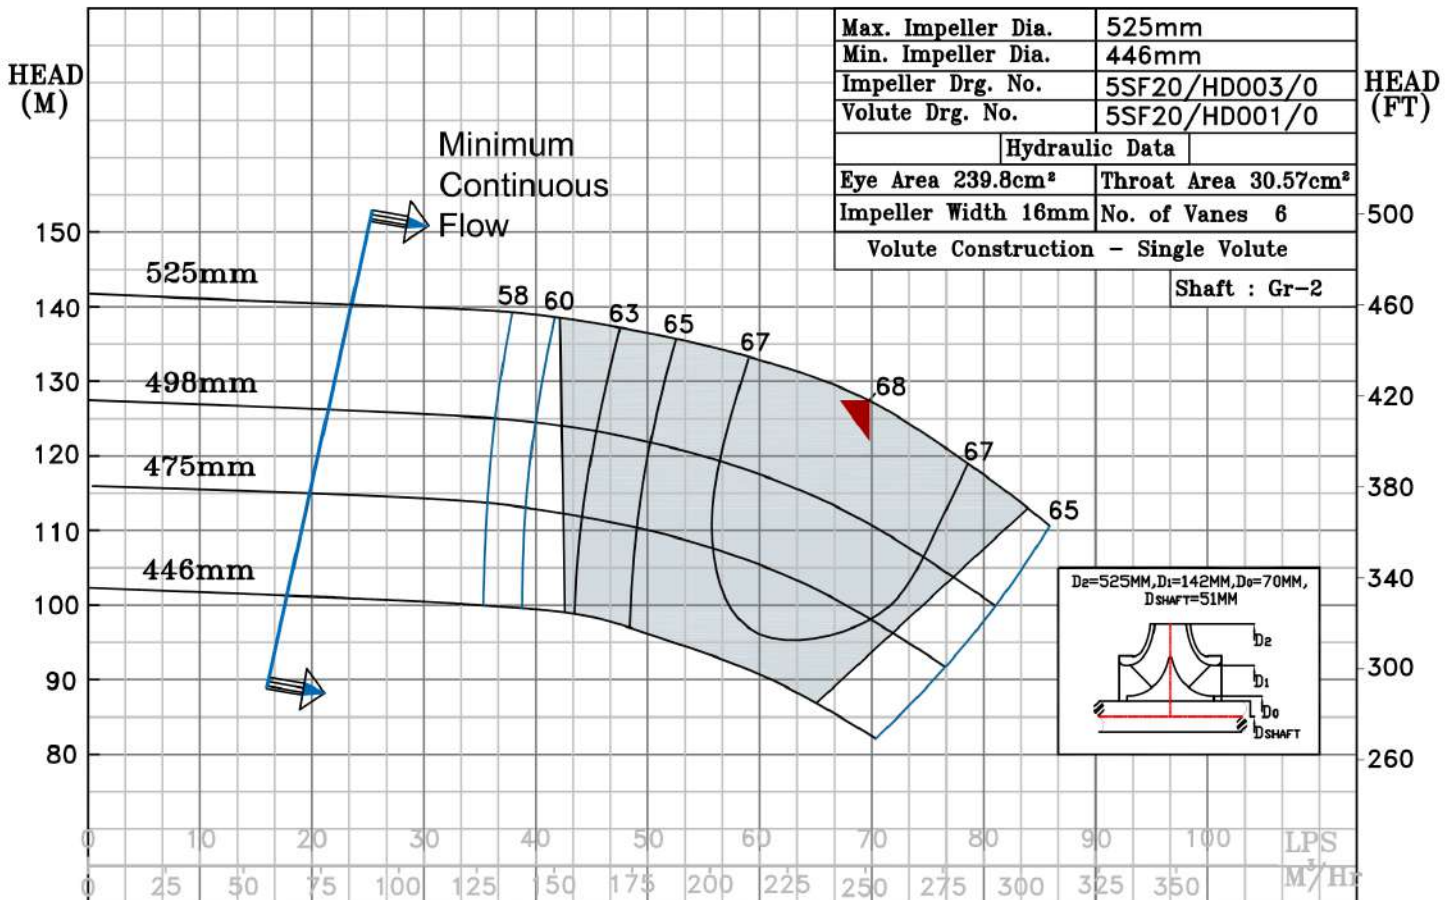

B.E.P Flow	252.5 M ³ /Hr.
B.E.P Head	127.2 M
Speed	1480 R.P.M
Ns : 643 US UNITS	

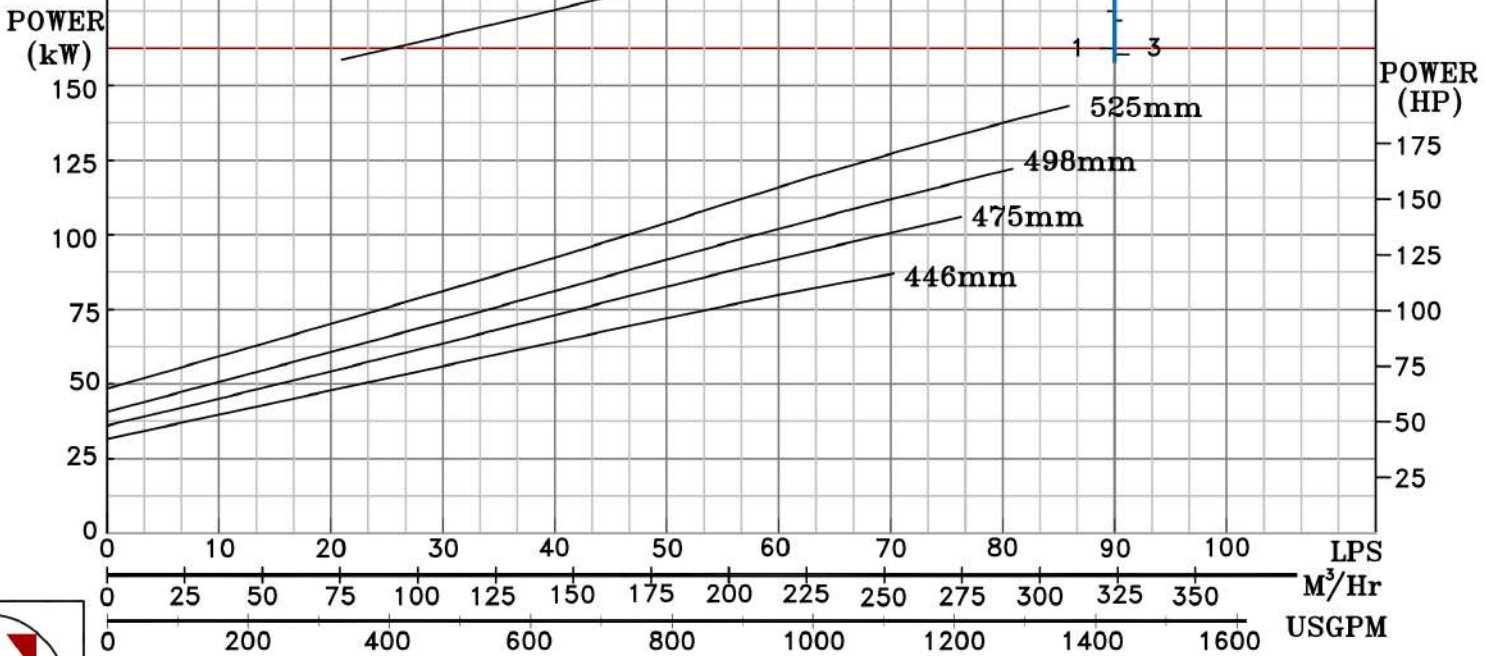

1780 RPM