

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 8SF26 @1780 R.P.M

8SF26/X/506864

FISHER PUMP

SF RANGE

MODEL 8SF26

WORKING PRESS. 20 bar

SIZE 250x200-662


TEST PRESS. 30 bar

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 1780 rpm


SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

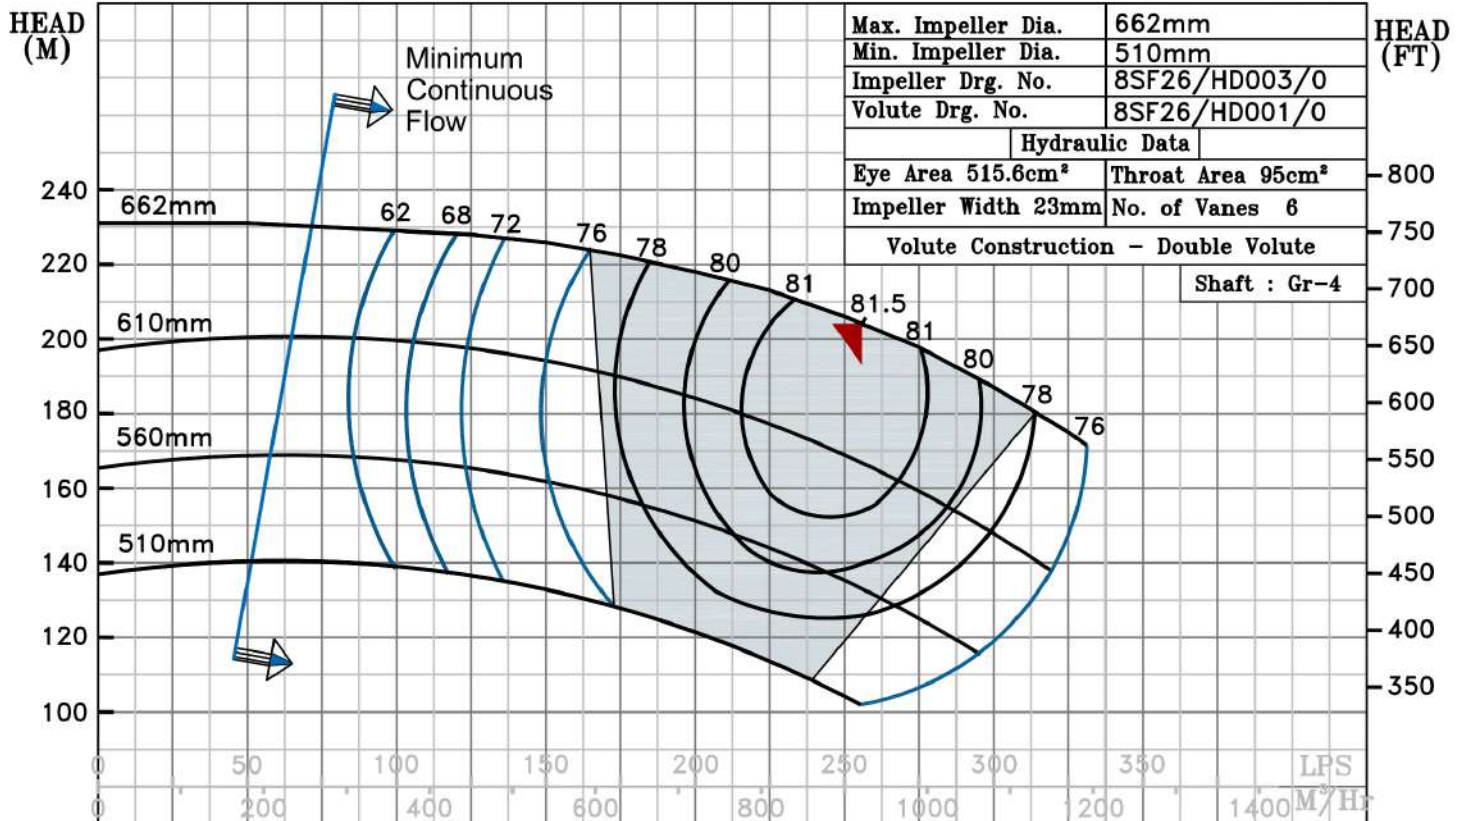

B.E.P Flow	922 M ³ /Hr.
B.E.P Head	204 M
Speed	1780 R.P.M
Ns :	862 US UNITS

NPSHr	
(M)	(FT)
15	45
10	30
5	15
0	0

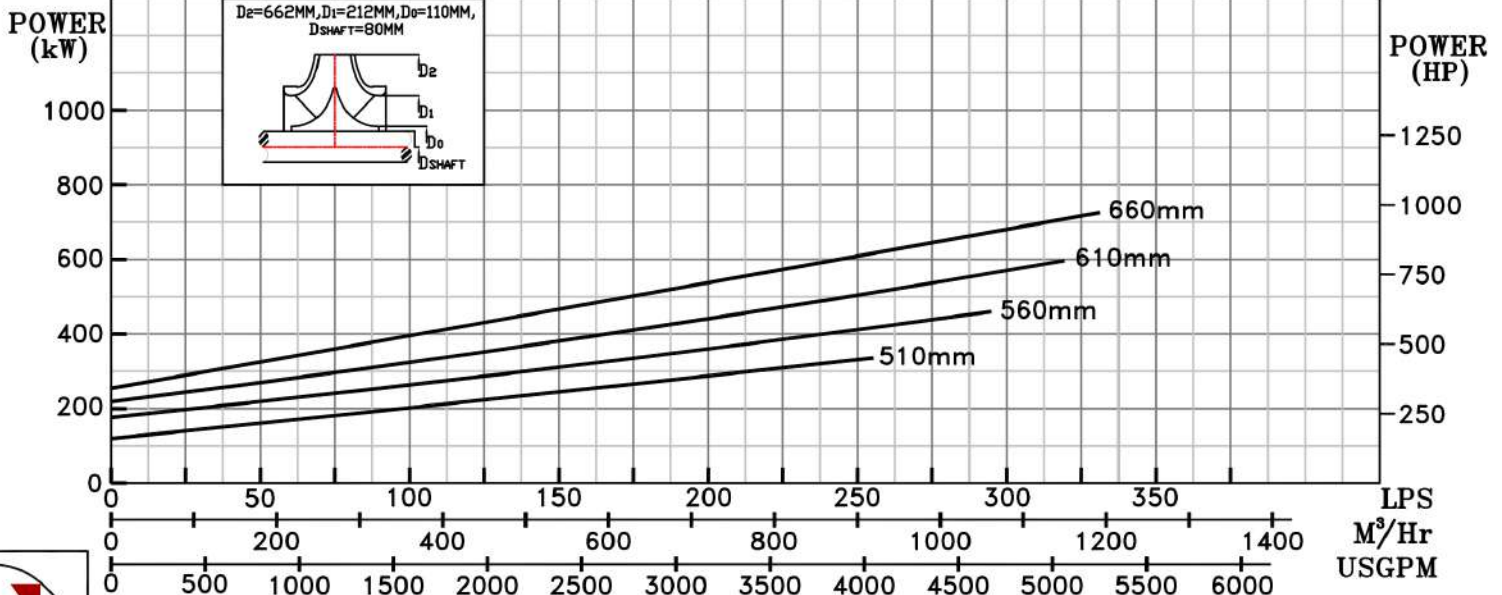

1780 RPM

